

## 1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier with Heatsink, SMA, 38 dB Gain, 5.5 dB NF



### PE15A4054F

#### Features

- 2 to 8 GHz Frequency Range
- P1dB 1 Watt min.
- Small Signal Gain: 38 dB min.
- Gain Flatness:  $\pm 2.5$  dB typ.
- Noise Figure 5.5 dB max.
- 50 Ohm Input and Output Matched
- 0 to 50°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in DC Voltage Regulator
- Field Replaceable SMA Female connectors
- Integrated Finned Heatsink with Cooling Fan

#### Applications

- Electronic Warfare
- Electronic Countermeasures
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Communication Systems
- Satellite Communications
- Microwave Radio Systems
- Driver Amplifier
- High Power Output Amplifier

#### Description

The PE15A4054F is a coaxial medium power amplifier with finned heatsink and cooling fan, operating in the 2 to 8 GHz frequency range. The amplifier offers 1 Watt of P1dB minimum and 38 dB small signal gain minimum, with gain flatness of  $\pm 2.5$  dB typical. The Power Amplifier / Heatsink Fan assembly requires a single +12 Vdc supply using voltage and ground wires that attach to the heatsink terminal block. The Power Amplifier has an internal regulator with DC capacitors. Operational temperature range is 0°C to 50°C. The integrated design comes fully assembled and effectively maintains an adequate baseplate temperature for highly reliable operation. Additionally, the amplifier module supports fields replaceable connectors and is designed to meet MIL-STD-202 environmental test conditions for Humidity, Shock, Vibration, and Altitude.

#### Electrical Specifications (TA = +25°C, DC Voltage = +12Volts, DC Current = 2.36A)

Description	Min	Typ	Max	Unit
Frequency Range	2		8	GHz
Small Signal Gain	38			dB
Gain Flatness		$\pm 2.5$		dB
Output Power at 1 dB Compression Point	+30			dBm
Noise Figure 1			5.5	dB
Impedance (Input)	50			Ohms
Impedance (Output)	50			Ohms
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage		+12		Volts
Operating DC Current		2.36		A
Operating Temperature Range	0		+50	°C

#### Mechanical Specifications

Size  
Length

5.51 in [139.95 mm]

1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier  
with Heatsink, SMA, 38 dB Gain, 5.5 dB NF



## PE15A4054F

Width	5.1 in [129.54 mm]
Height	2.36 in [59.94 mm]
Weight	3 lbs [1.36 kg]
Input Connector	SMA Female
Output Connector	SMA Female
Bias Connector	Solder Pin
Heatsink Fin Material	6063-T5 Aluminum Alloy Black Anodine finish

### Environmental Specifications

#### Temperature

Operating Range	0 to +50 deg C
Storage Range	-40 to +100 deg C
Humidity	MIL-STD-202F, Method 103B, Condition B
Shock	MIL-STD-202F, Method 213B, Condition B
Vibration	MIL-STD-202F, Method 204D, Condition B
Altitude	MIL-STD-202F, Method 105C, Condition B

### Compliance Certifications

 (see product page for current document)

### Plotted and Other Data

#### Notes:

- Values at 25 °C, sea level
- Heatsink Included

1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier  
with Heatsink, SMA, 38 dB Gain, 5.5 dB NF



**PE15A4054F**

### Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 

$P_{in}$  for Small Signal Gain = P1dB-SSG-10 dB



$P_{in}$  for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 500Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier  
with Heatsink, SMA, 38 dB Gain, 5.5 dB NF




## PE15A4054F



### Typical Performance Data

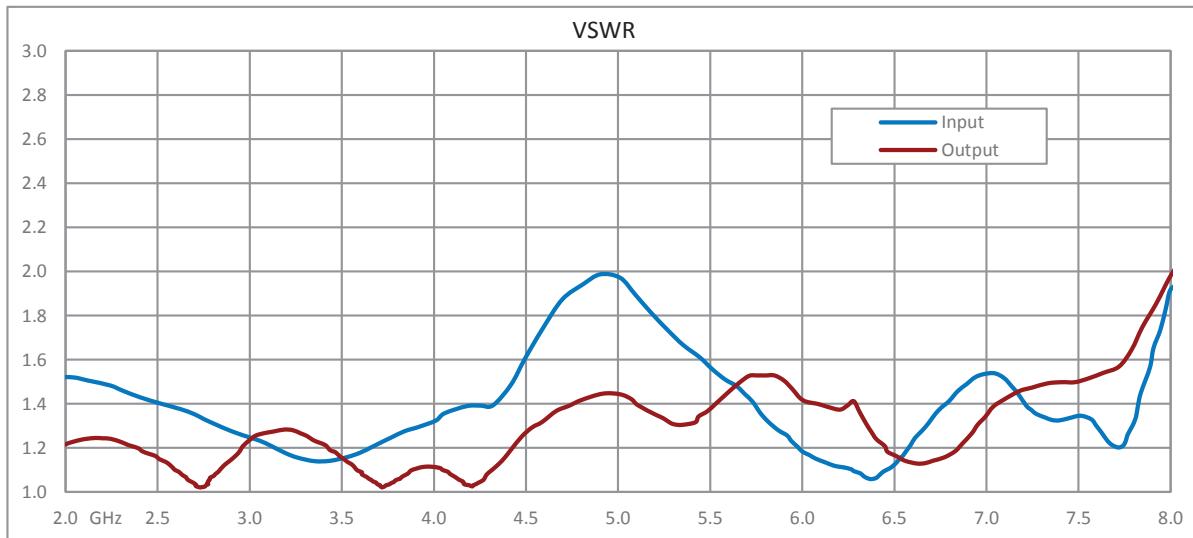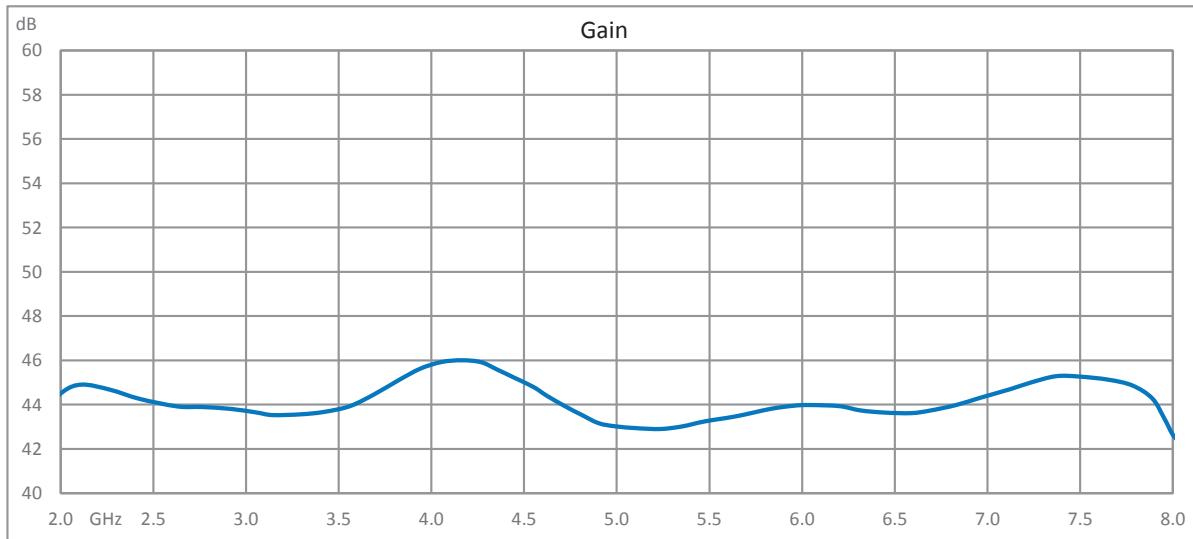

1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier  
with Heatsink, SMA, 38 dB Gain, 5.5 dB NF



**PE15A4054F**

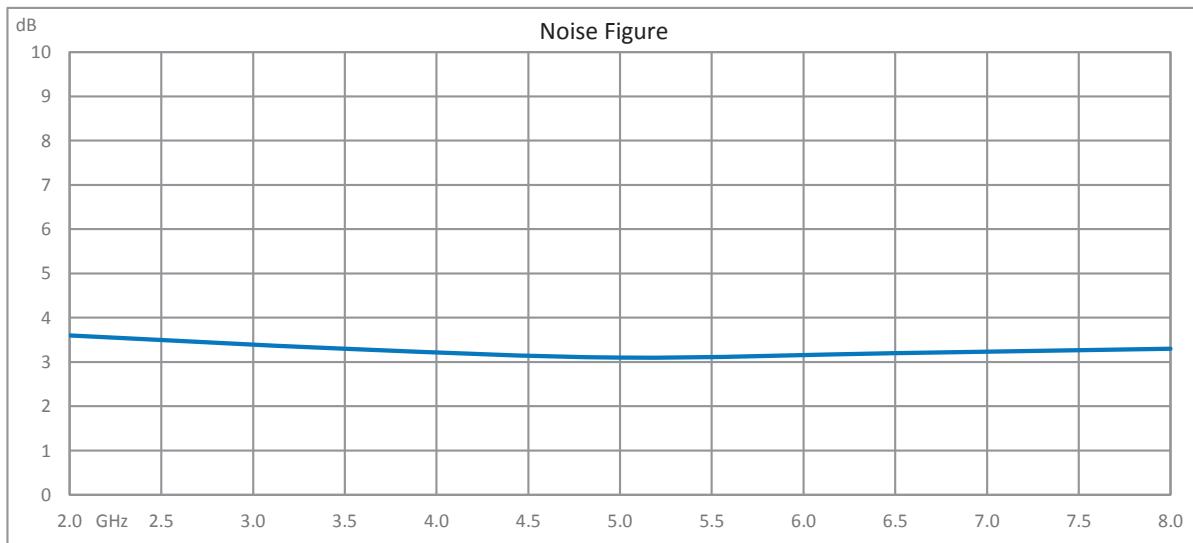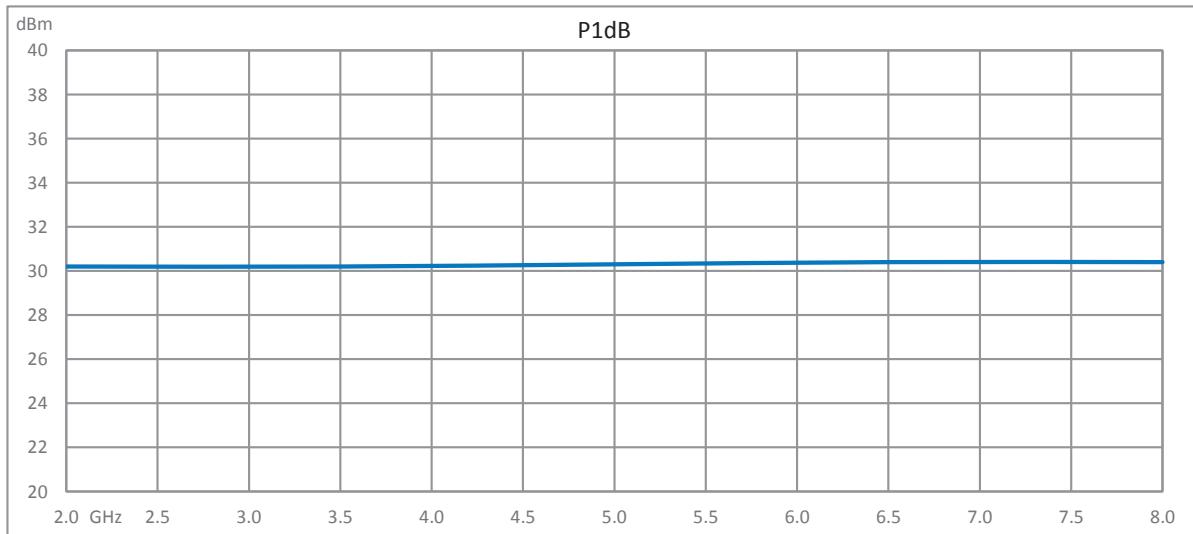

1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier  
with Heatsink, SMA, 38 dB Gain, 5.5 dB NF



## PE15A4054F

1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier with Heatsink, SMA, 38 dB Gain, 5.5 dB NF from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier with Heatsink, SMA, 38 dB Gain, 5.5 dB NF PE15A4054F](https://www.pasternack.com/8-ghz-medium-power-amplifier-38-db-gain-sma-pe15a4054f-p.aspx)

URL: <https://www.pasternack.com/8-ghz-medium-power-amplifier-38-db-gain-sma-pe15a4054f-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE15A4054F CAD Drawing


1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier with Heatsink, SMA, 38 dB Gain, 5.5 dB NF

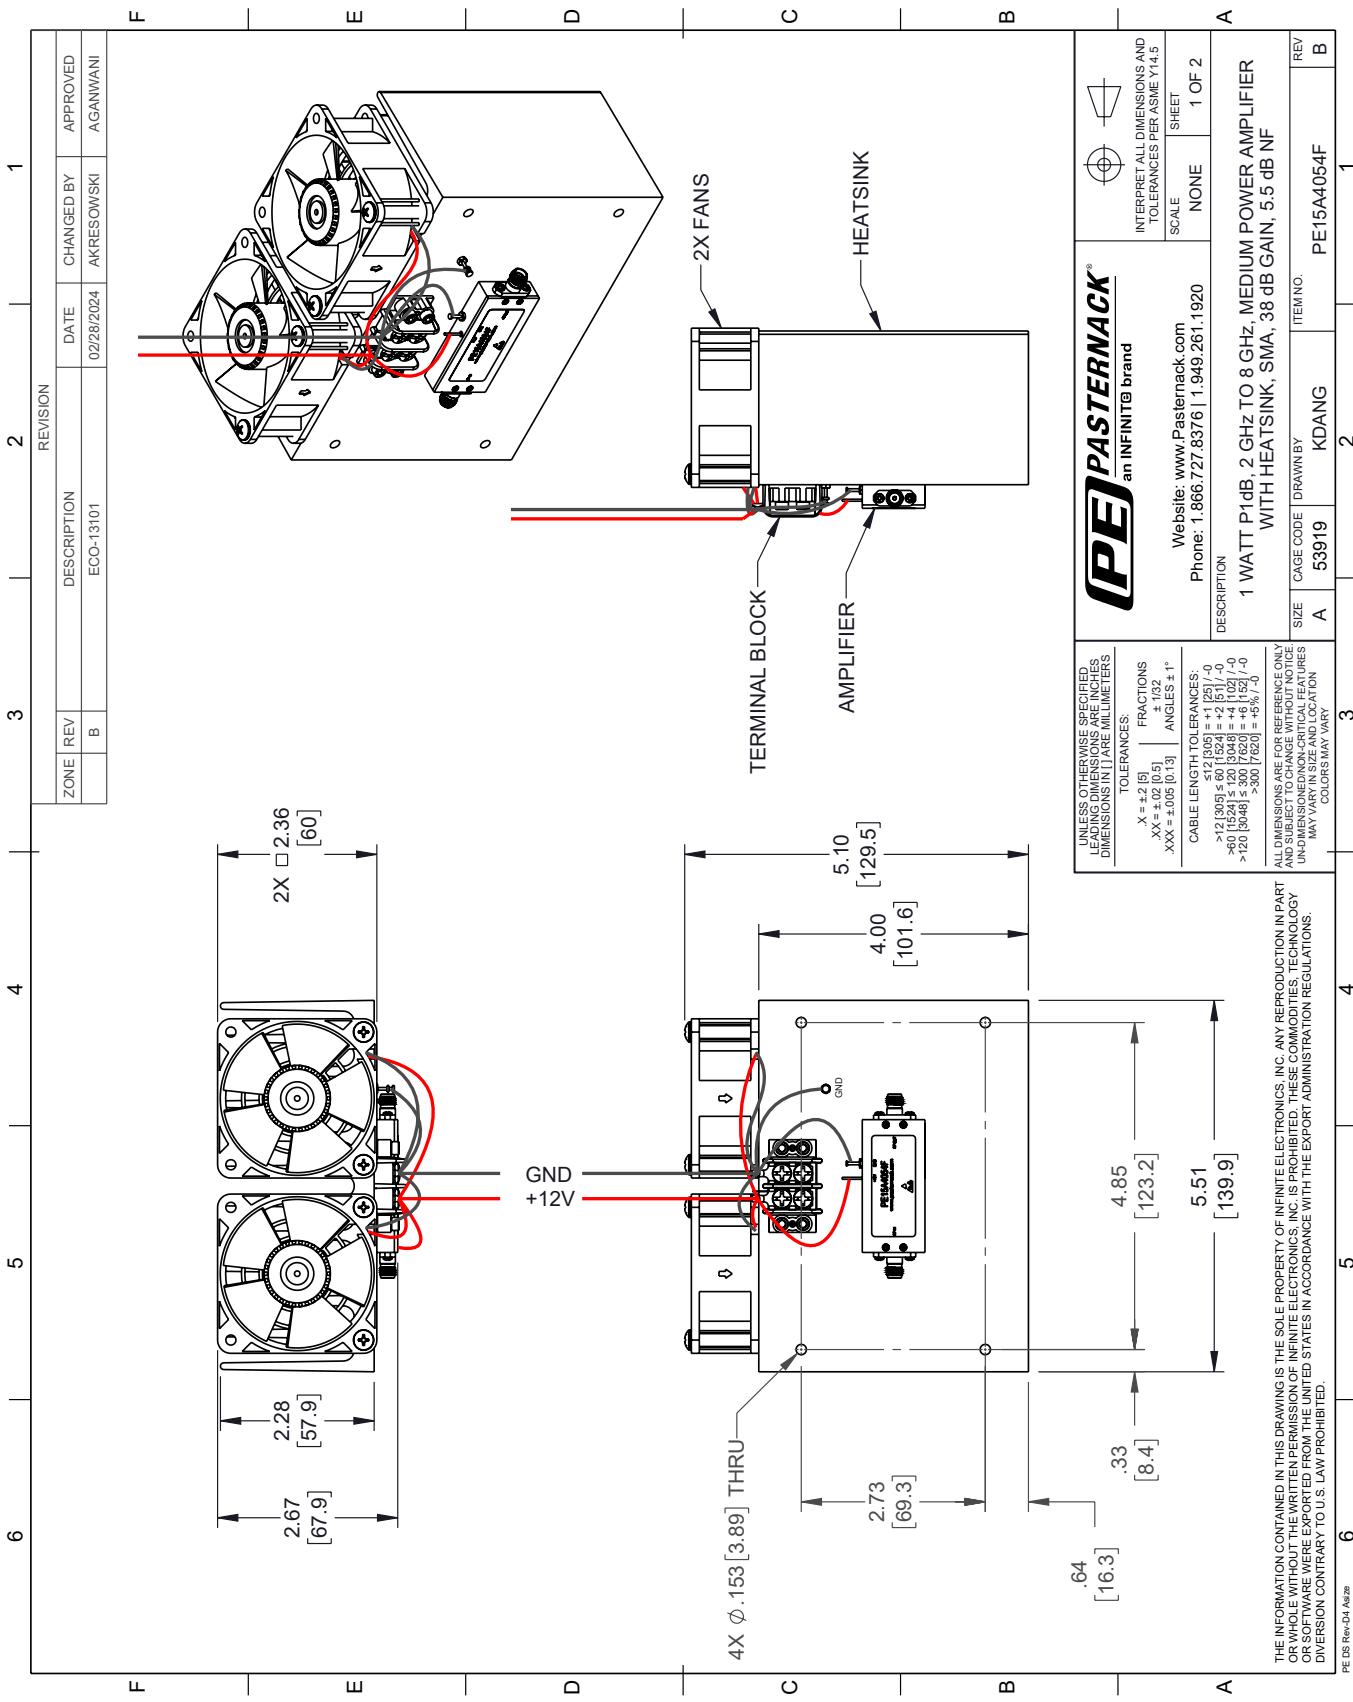

# PE15A4054F CAD Drawing

1 Watt P1dB, 2 GHz to 8 GHz, Medium Power Amplifier with Heatsink, SMA, 38 dB Gain, 5.5 dB NF

## AMPLIFIER DETAIL

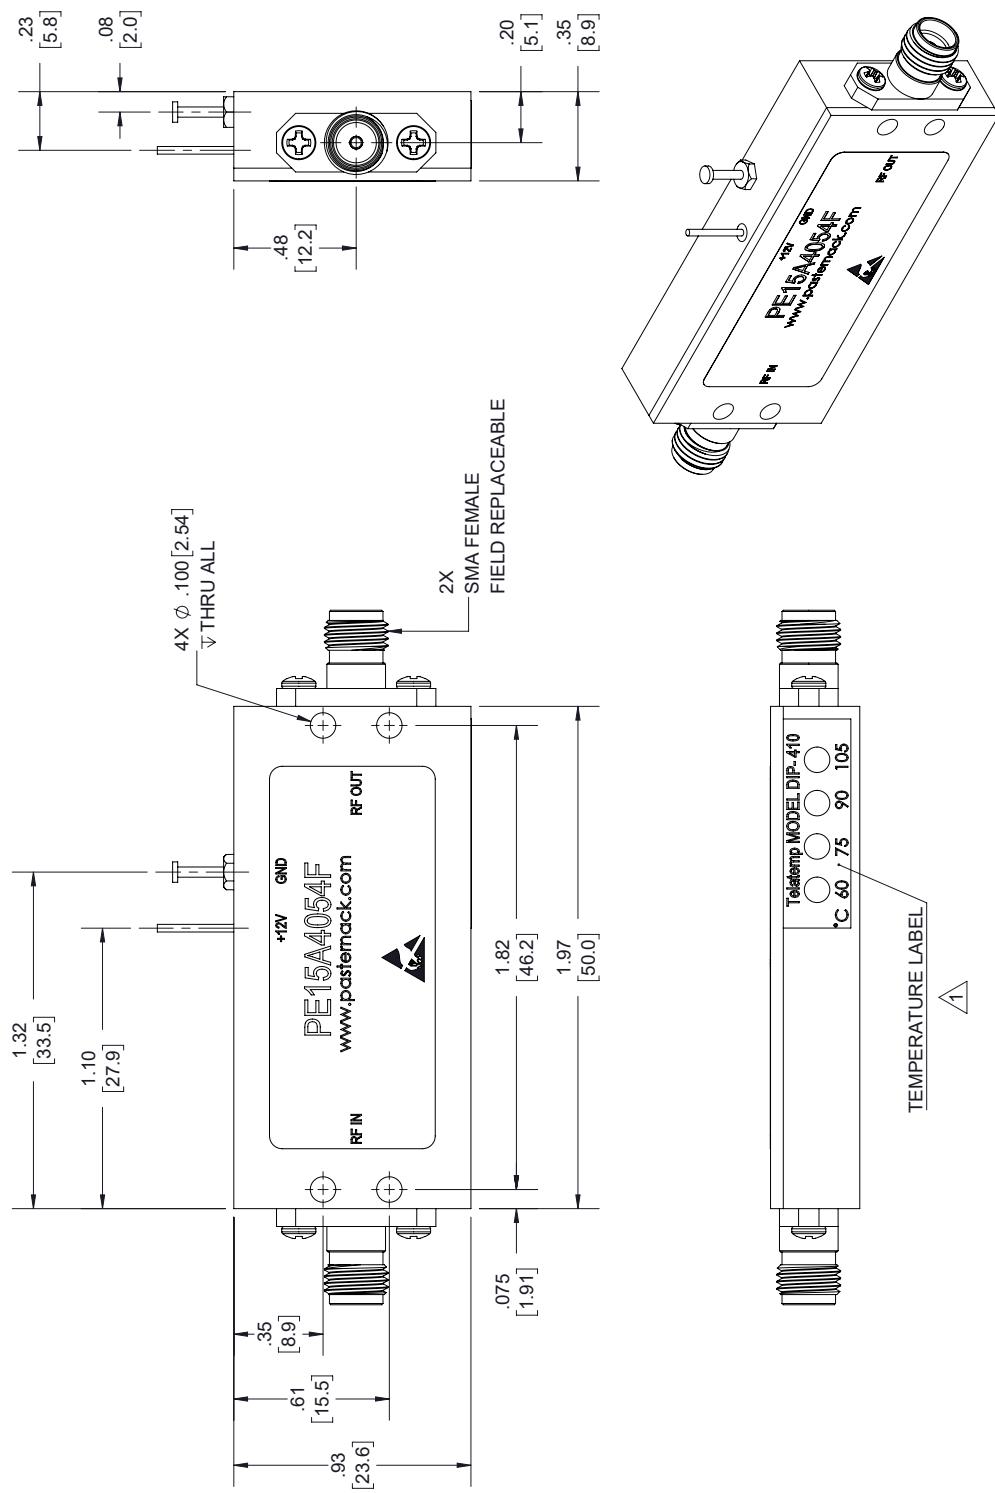

THE INFORMATION AND DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF PASTERNACK CORPORATION. ALL RIGHTS RESERVED.	
PE	<b>PASTERNACK</b> an INFINITE® brand
Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623 Phone: 1.949.261.9220   1.866.227.8376 Fax: 1.949.261.7451 www.pasternack.com   e-mail: sales@pasternack.com	www.pasternack.com   e-mail: sales@pasternack.com
SHEET 2 OF 2	SCALE N/A
SIZE CAGE A 53919	PART NUMBER PE15A4054F
REV A	

### NOTE:

1. WARRANTY VOID IF REMOVED.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION OR USE PROHIBITED.