



Directional 6 dB SMA Coupler From 4 GHz
to 18 GHz Rated To 4 Watts

TECHNICAL DATA SHEET

PE2216-6

Directional 6 dB SMA Coupler From 4 GHz to 18 GHz Rated To 4 Watts

Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Connector 3	SMA Female
Design	Directional Coupler

Electrical Specifications

Frequency Range, GHz	4 to 18
Directivity, dB	12
Impedance, Ohms	50
Maximum Insertion Loss, dB	0.9
Maximum Input Power, Watts	4
Maximum Input VSWR	1.4:1
Coupling Value, dB	6
Coupling Tolerance, dB	± 1
Frequency Sensitivity, dB	0.5

Mechanical Specifications

Size

Length, in [mm]	2.11 [53.59]
Width, in [mm]	0.4 [10.16]
Height, in [mm]	1.1 [27.94]

Connector 1

Type	SMA Female
------	------------

Connector 2

Type	SMA Female
------	------------

Connector 3

Type	SMA Female
------	------------

Compliance Certifications (visit www.Pasternack.com for current document)

REACH Compliant	06/18/2012
-----------------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 4 GHz to 18 GHz Rated To 4 Watts PE2216-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Directional 6 dB SMA Coupler From 4 GHz
to 18 GHz Rated To 4 Watts

TECHNICAL DATA SHEET

PE2216-6

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Directivity: 15 minimum for 4-12.4 GHz, 12 minimum for
12.4-18 GHz

Directional 6 dB SMA Coupler From 4 GHz to 18 GHz Rated To 4 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 4 GHz to 18 GHz Rated To 4 Watts PE2216-6](http://www.pasternack.com/directional-6-db-sma-coupler-4-18-ghz-50-watts-pe2216-6-p.aspx)

URL: <http://www.pasternack.com/directional-6-db-sma-coupler-4-18-ghz-50-watts-pe2216-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Directional 6 dB SMA Coupler From 4 GHz to 18 GHz Rated To 4 Watts

Directional 6 dB SMA Coupler From 4 GHz to 18 GHz Rated To 4 Watts

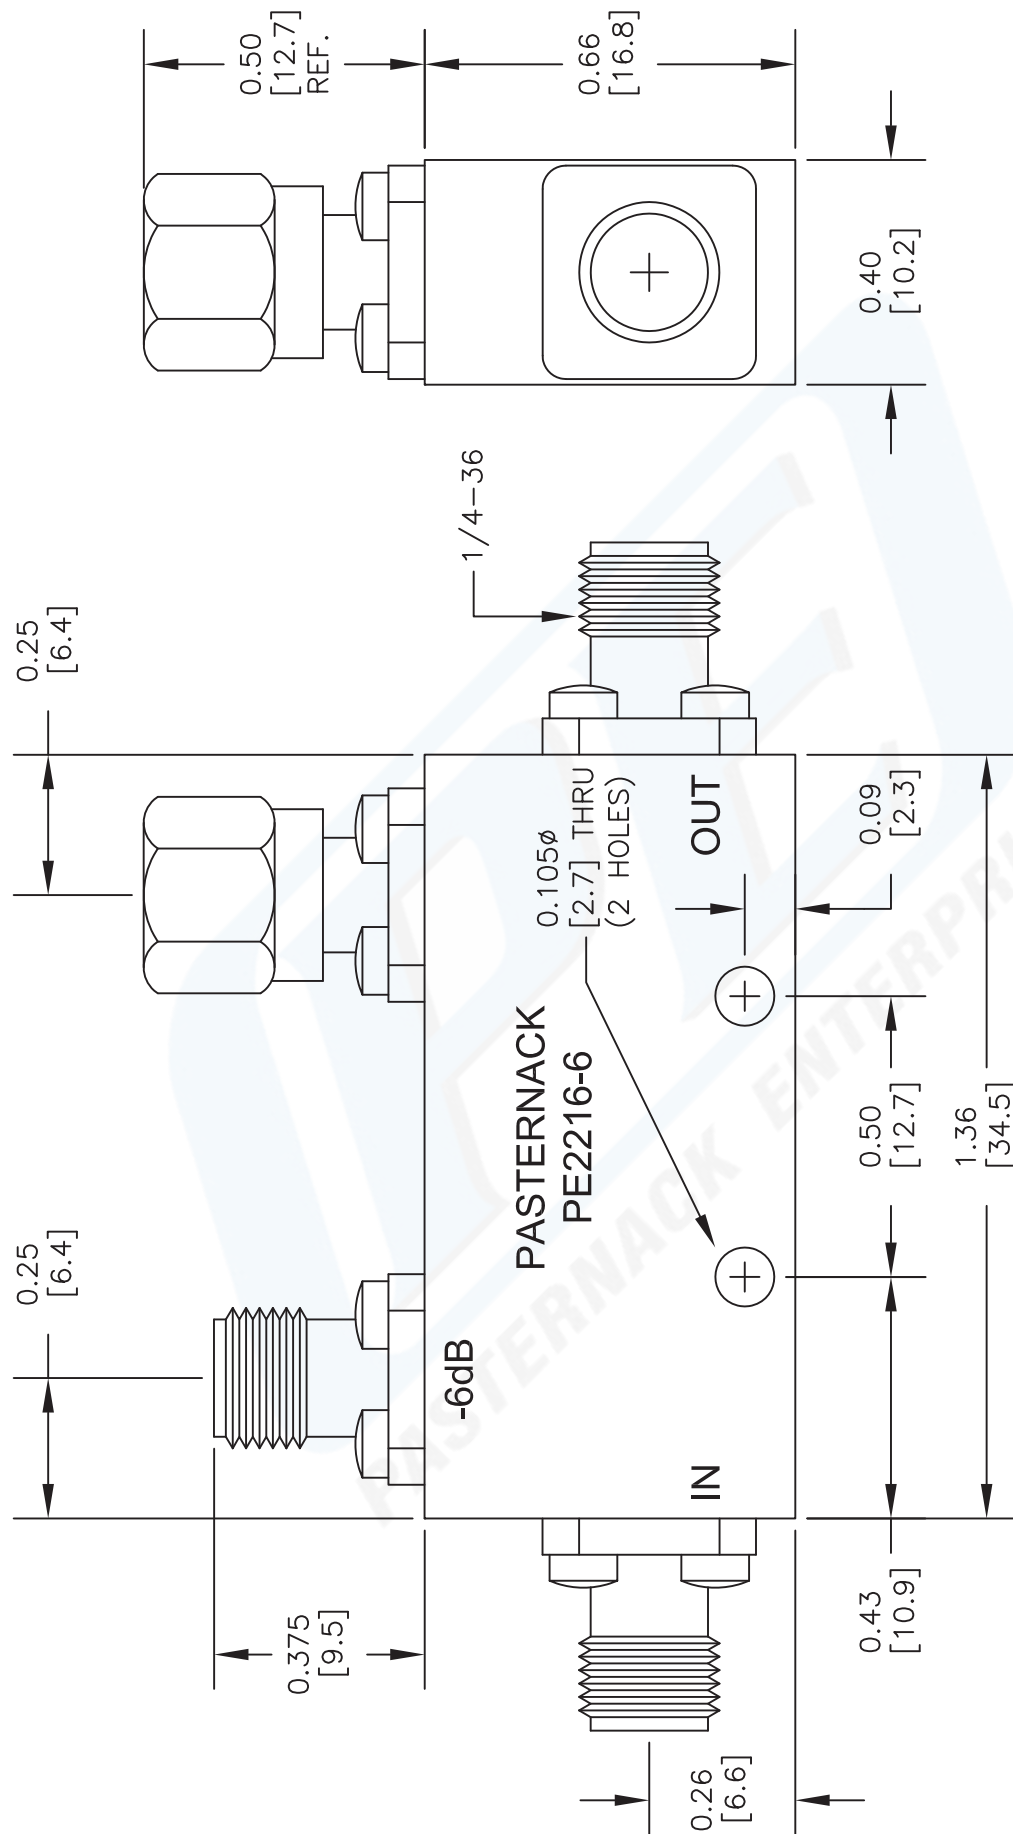

DWG TITLE

PE2216-6

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 121313

SCALE N/A

SIZE A

2233



PASTERNAK®

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Phone: (345) 201-1920 | Fax: (345) 201-1751
 Website: www.pasternack.com | E-Mail: sales@pasternack.com