



## BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

**PE34175LF**

#### Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: PE-SR401AL-STRAIGHT

#### Features

- Max Frequency 4 GHz
- 69.5% Phase Velocity

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE34175LF BNC male to BNC male cable using PE-SR401AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm semi-rigid PE-SR401AL-STRAIGHT coax. The PE34175LF BNC male to BNC male cable assembly operates to 4 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
Velocity of Propagation		69.5		%
Capacitance		29.6 [97.11]		pF/ft [pF/m]
Dielectric Withstanding Voltage (AC)			7,500	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.4	0.5	1	4		GHz
Insertion Loss (Typ.)	0.045	0.05	0.075	0.184		dB/ft
	0.15	0.16	0.25	0.6		

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder PE34175LF](#)



## BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

**PE34175LF**

Power Handling (Max.)	962	661	265	174	W
-----------------------	-----	-----	-----	-----	---

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.107 lbs [48.53 g]

##### Cable

Cable Type PE-SR401AL-STRAIGHT  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 1  
 Shield Layer 1 Tinned Aluminum  
 Jacket Diameter 0.25 in [6.35 mm]

One Time Minimum Bend Radius 0.25 in [6.35 mm]

##### Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Male
Specification	MIL-C-39012	MIL-C-39012
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	MIL-G-45204	MIL-G-45204
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

#### Mechanical Specification Notes:

Cable assemblies that are 60 inches or less use straight coax, greater than 60 inches use coiled coax

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

##### Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder PE34175LF](#)



## BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

**PE34175LF**

#### How to Order

Part Number Configuration:

**PE34175LF - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE34175LF-12 = 12 inches long cable  
PE34175LF-100cm = 100 cm long cable

BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder PE34175LF](#)


URL: <https://www.pasternack.com/bnc-male-bnc-male-pe-sr401al-cable-assembly-pe34175lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE34175LF CAD Drawing

BNC Male to BNC Male Cable Using PE-SR401AL Coax , LF Solder

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in Inches

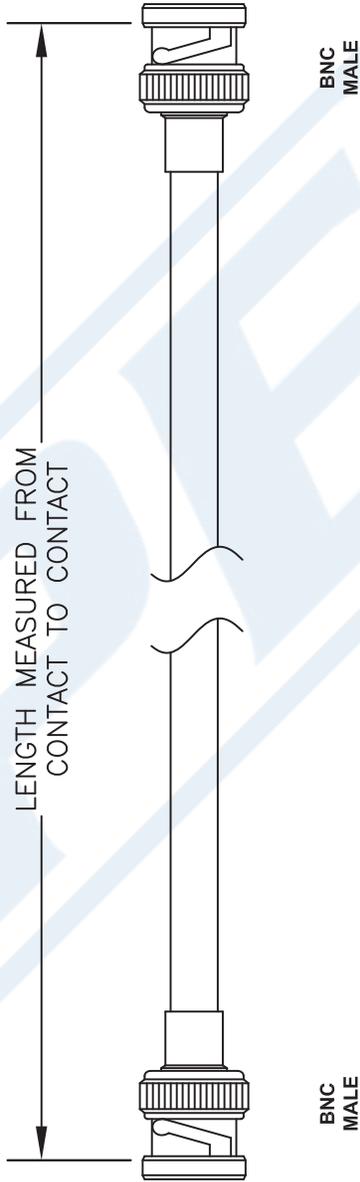

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE34175-XX**

REV. -	FSCM NO. 53919	CAD FILE 020607	SCALE N/A	SIZE A	127
--------	----------------	-----------------	-----------	--------	-----

**PE PASTERNAK®**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com