



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

Features

- Wideband Output Frequency
- 25 MHz to 6 GHz
- Integer and Fractional operating modes
- Up to 50 dB Attenuation adjustable in 1 dB steps
- USB 2.0 Interface
- Female SMA output
- USBTMC VISA Compliant
- User Selectable internal reference or externally applied reference
- Small compact package size
- LED indicators
- Downloadable User Manual
- Accessory cables included

Applications

- Signal Generators
- Test Equipment
- RF System Integration
- Communication Systems
- EW Systems
- UHF/VHF Systems
- Radar Systems
- Frequency Conversion
- SIGINT

Description

The PE11S3901 is a Frequency Synthesizer Module that covers a wide frequency band from 25 MHz to 6 GHz with exceptional spurious rejection and phase noise performance. Attenuation range up to 50 dB is adjustable in 1 dB steps across the entire frequency band. This high quality signal source has several outstanding features including a USB 2.0 interface that is powered and command controlled directly by a host PC and a Female SMA output connector, and is VISA compliant which enables seamless cross platform use. The synthesizer can be GUI controlled via Windows®, Macintosh®, or Linux® platforms, or with SCPI compliant VISA commands (downloadable user manual), or with other system design software such as LabVIEW®. The compact size makes it ideal for bench top test and measurement use or for radar and communication systems. Frequency resolution of the PE11S3901 is available in integer and fractional operating modes and the User can select between an internal reference (capable of phase locking) or externally applied reference. The module supports integrated phase locked loop (PLL) circuitry that the User can select between an internal reference (capable of phase locking) or externally applied reference. The RF Synthesizer Module comes complete with a USB 2.0 A extension and an SMA male to MMCX plug cable.

Electrical Specifications (TA= 25°C)

Mode
Reference
Option(s)
Control Interface

Integer/Fractional
Internal (External Optional)
Phase Lock Indicator
USB

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.025		6	GHz
Phase Locked Speed		1		ms
Phase Noise @100kHz Offset		-86		dBc/Hz
2nd Harmonic		-24.66		dBc
3rd Harmonic		-10.66		dBc
4th Harmonic		-34.5		dBc
Reference Frequency	10	50	100	MHz
Reference Power (CW)	+0		+15	dBm

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

Internal Reference Frequency	50	MHz
Internal Reference Accuracy	0.5	ppm

Performance by Frequency

Description	F1	F2	F3	F4	Units
Frequency	0.05	3	6		GHz
Phase Noise @ 100 kHz Offset (with internal reference)	-104	-95	-86		dBc/Hz
2nd Harmonics	-24.66	-26.17	-28.5		dBc
3rd Harmonics	-10.66	-29	-47.5		dBc
4th Harmonics	-34.5	-46.83	> -70		dBc

Description	F1	F2	F3	F4	Units
Frequency	.025 to 1	1 to 1.5	1.5 to 3	3 to 6	GHz
Step Size (Integer Mode)	12.5	25	50	100	MHz

Electrical Specification Notes:

Step size specified under default conditions (a 50 MHz reference input with a reference divider of 1).

Mechanical Specifications

Size

Length	4.1 in [104.14 mm]
Width	0.9 in [22.86 mm]
Height	0.645 in [16.38 mm]
Weight	0.27 lbs [122.47 g]

Configuration

Package Type	Connectorized
Reference Connector	MMCX Female
Output Connector	SMA Female
Control Connector	USB Type A - Male
Reference Divider Out Connector	MMCX Female

Mechanical Specification Notes:

The USB Type A - Male connector is used for both Power and Control.

Environmental Specifications

Temperature

Operating Range	0 to +55 deg C
Storage Range	-50 to +100 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](#)



USB Frequency Synthesizer Module, Phase Locked
Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Plotted and Other Data
Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](#)







USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

Typical Performance Data

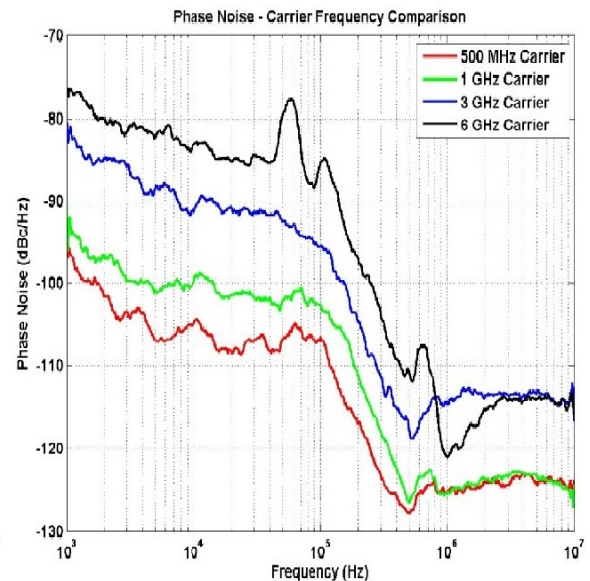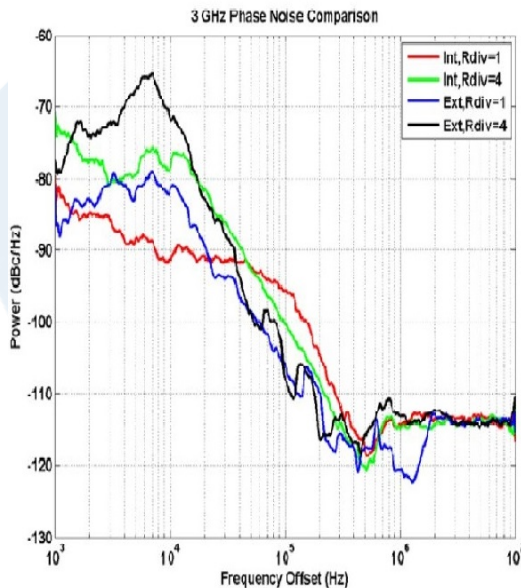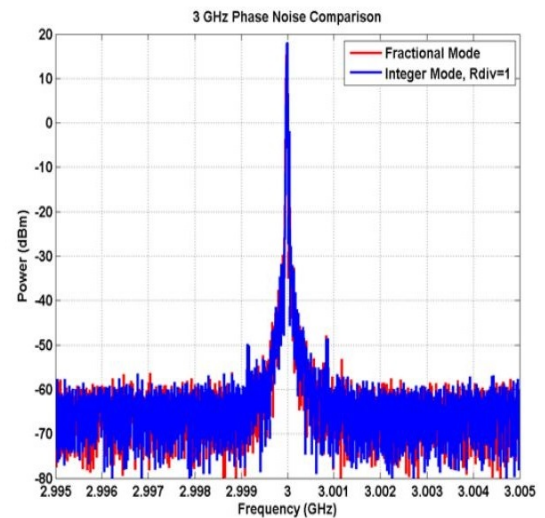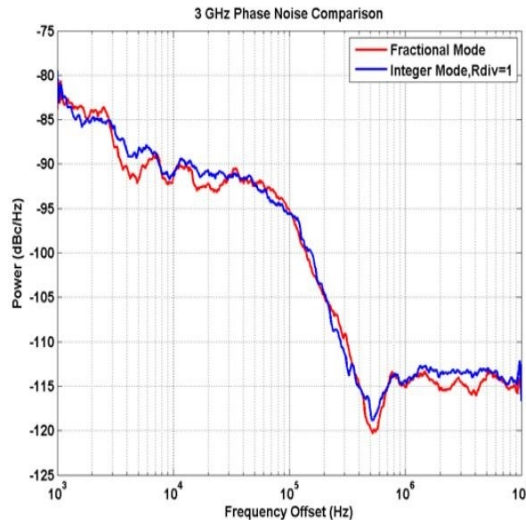


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

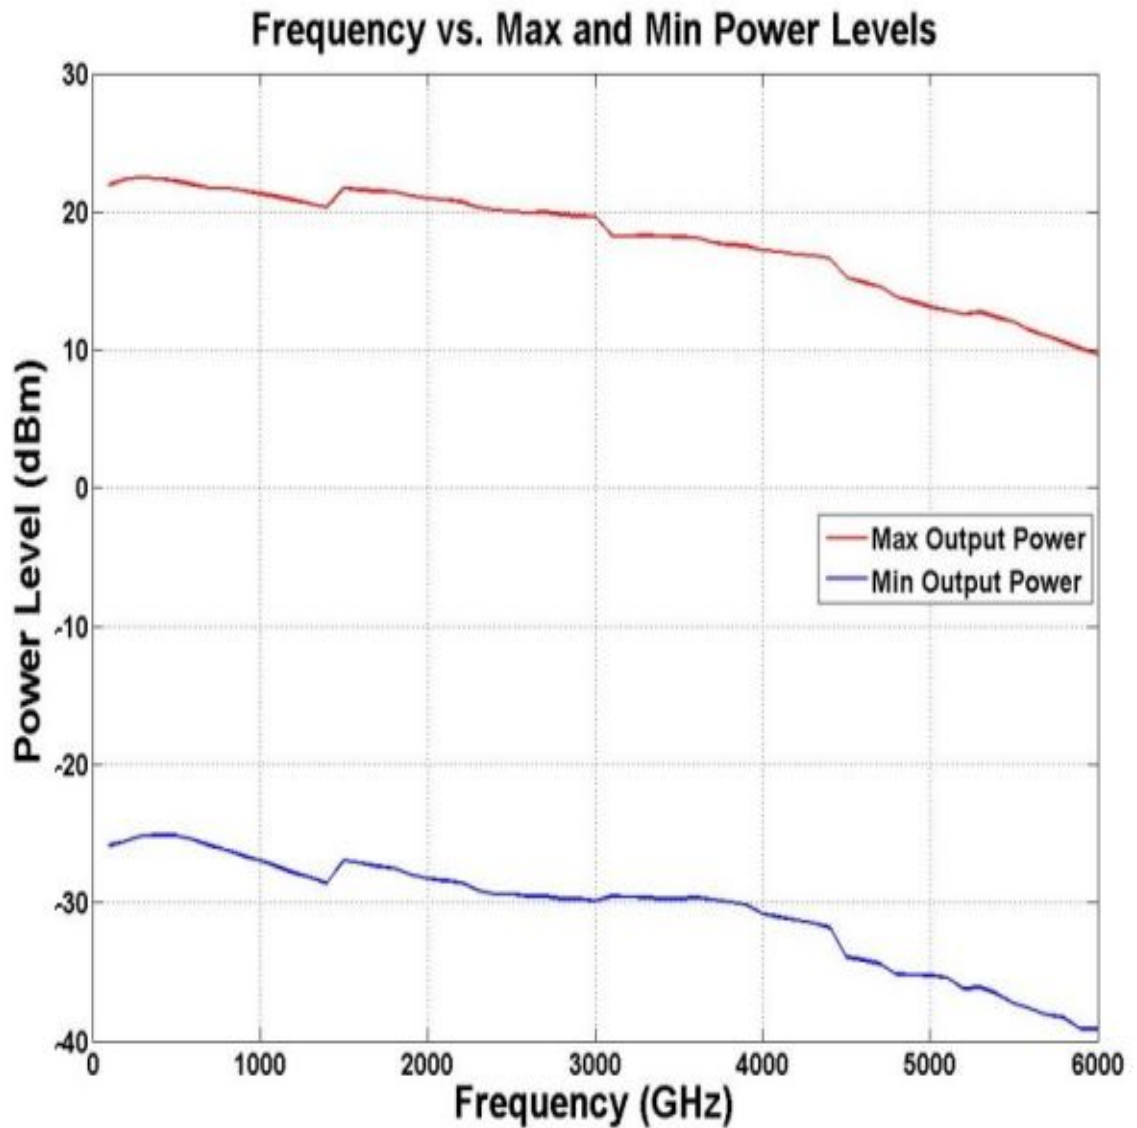





Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

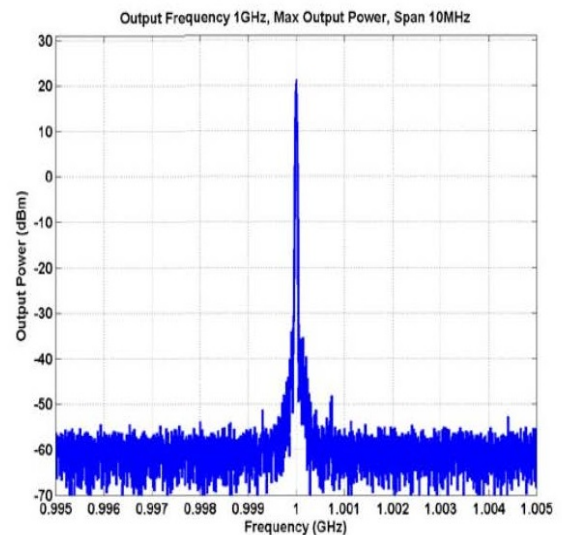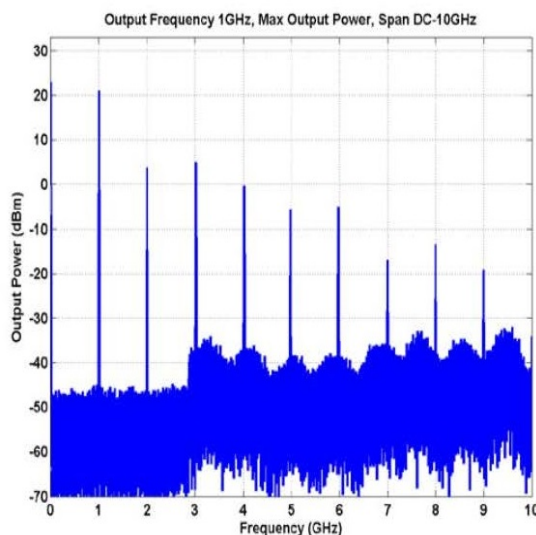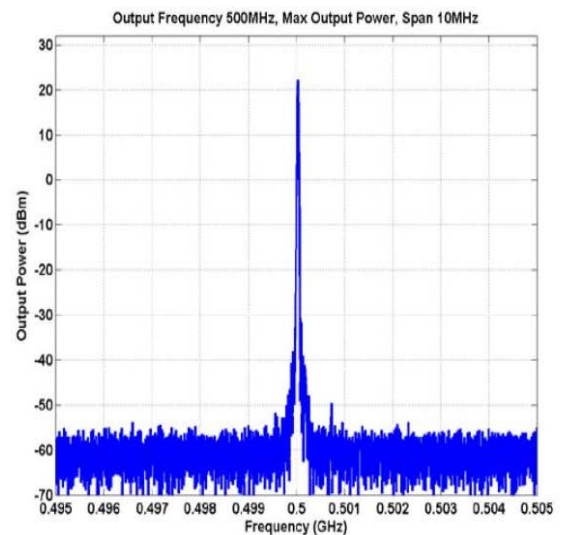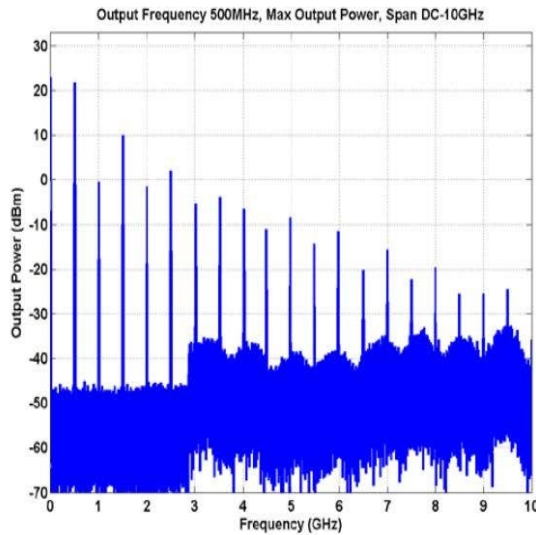





Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

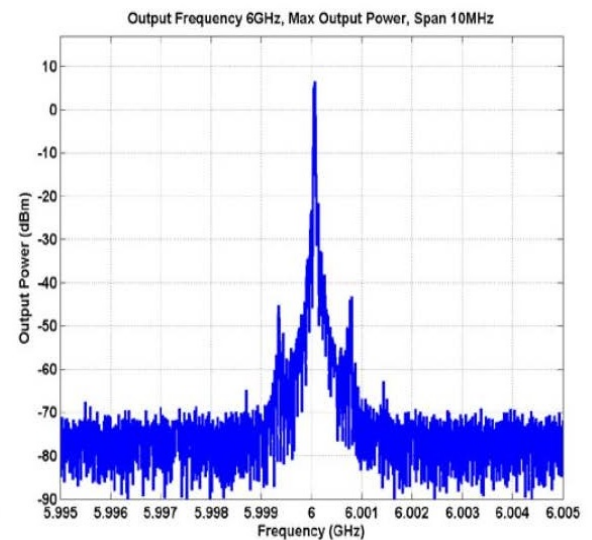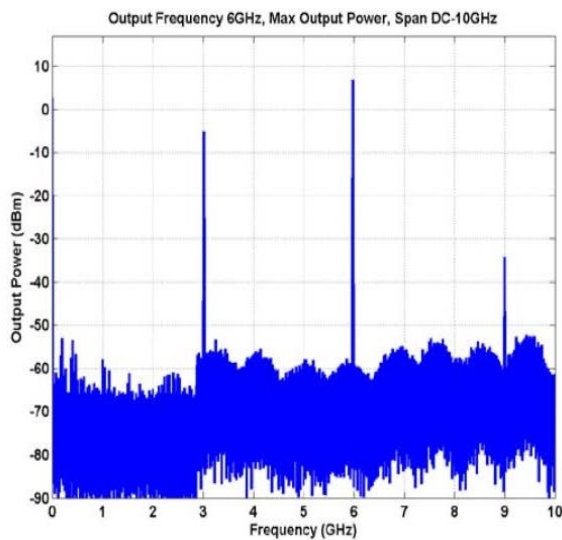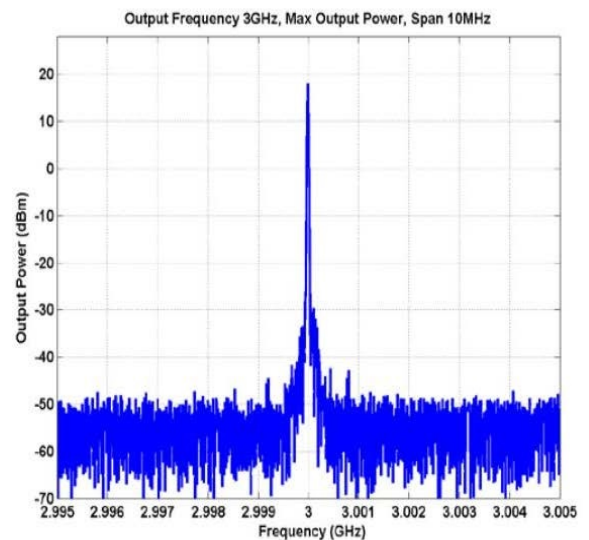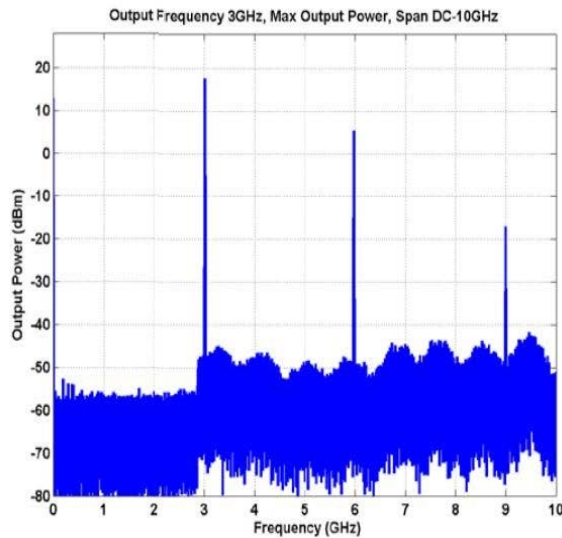

USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3901

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 25 MHz to 6 GHz Output, SMA PE11S3901](http://www.pasternack.com/usb-frequency-synthesizer-module-pll-25-mhz-6-ghz-sma-pe11s3901-p.aspx)

URL: <http://www.pasternack.com/usb-frequency-synthesizer-module-pll-25-mhz-6-ghz-sma-pe11s3901-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 25 MHz to 6 GHz Output, SMA



PE11S3901

FSCM NO. 53919

CAD FILE 021516

SIZE A

2233



PARNER
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | **E-Mail:** sales@pasternack.com