



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3905

Features

- 24 GHz to 27 GHz Output Frequency
- Integer and Fractional operating modes
- +17 dBm typ output power
- 30 dB Attenuation adjustable in 1 dB steps
- USB 2.0 Interface
- Female SMA output
- USBTMC VISA Compliant
- User Selectable internal reference or externally applied reference
- Small compact package size
- LED indicators
- Downloadable User Manual
- Accessory cables included

Applications

- Signal Generators
- Test Equipment
- RF System Integration
- Communication Systems
- EW Systems
- K-Band Systems
- Radar Systems
- Frequency Conversion
- SIGNIT

Description

The PE11S3905 is a Frequency Synthesizer Module that covers a frequency band from 24 GHz to 27 GHz with exceptional spurious rejection and phase noise performance. Output power +17 dBm typ across the entire band and Attenuation range up to 30 dB is adjustable in 1 dB steps. This high quality signal source has several outstanding features including a USB 2.0 interface that is powered and command controlled directly by a host PC and a Female SMA output connector, and is VISA compliant which enables seamless cross platform use. The synthesizer can be GUI controlled via Windows®, Macintosh®, or Linux® platforms, or with SCPI compliant VISA commands (downloadable user manual), or with other system design software such as LabVIEW®. The compact size makes it ideal for bench top test and measurement use or for radar and communication systems. Frequency resolution of the PE11S3905 is available in integer and fractional operating modes and the User can select between an internal reference (capable of phase locking) or externally applied reference. The module supports integrated phase locked loop (PLL) circuitry that the User can select between an internal reference (capable of phase locking) or externally applied reference. The RF Synthesizer Module comes complete with a USB 2.0 A extension and an SMA male to MMCX plug cable.

Electrical Specifications (TA= 25°C, Id1 = 470 mA)

Mode
Reference
Option(s)
Control Interface

Integer/Fractional
Internal (External Optional)
Phase Lock Indicator
USB

Description	Minimum	Typical	Maximum	Units
Frequency Range	24		27	GHz
Output Power		+17		dBm
Step Size (Integer Mode)		40		MHz
Step Size (Fractional Mode)		1		MHz
Phase Locked Speed		1		ms
Phase Noise @100kHz Offset		-75		dBc/Hz
Reference Frequency	10	50	1000	MHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 24 GHz to 27 GHz Output, SMA PE11S3905](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3905

Reference Power (CW)	+0	+15	dBm
Internal Reference Frequency	50		MHz
Internal Reference Accuracy	0.5		ppm
Operating DC Current 1	470		mA

Performance by Frequency

Description	F1	F2	F3	Units
Frequency	24	25.5	27	GHz
Phase Noise @ 100 kHz Offset (With Internal Reference)	-77	-75	-76	dBc/Hz
(1/2)Fo Harmonic	-26	-22	-16	dBc
(3/2)Fo Harmonic	-34	-34	-44	dBc
Output Power	+17	+17	+14	dBm

Electrical Specification Notes:

Step size specified under default conditions (a 50 MHz reference input with a reference divider of 1).

Mechanical Specifications

Size

Length	4.1 in [104.14 mm]
Width	0.9 in [22.86 mm]
Height	0.645 in [16.38 mm]
Weight	0.26 lbs [117.93 g]

Configuration

Package Type	Connectorized
Reference Connector	MMCX Female
Output Connector	SMA Female
Control Connector	USB Type A - Male
Reference Divider Out Connector	MMCX Female

Mechanical Specification Notes:

The USB Type A - Male connector is used for both Power and Control.

Environmental Specifications

Temperature

Operating Range	0 to +55 deg C
Storage Range	-50 to +100 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 24 GHz to 27 GHz Output, SMA PE11S3905](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3905

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Plotted and Other Data
Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 24 GHz to 27 GHz Output, SMA PE11S3905](#)







USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3905

Typical Performance Data

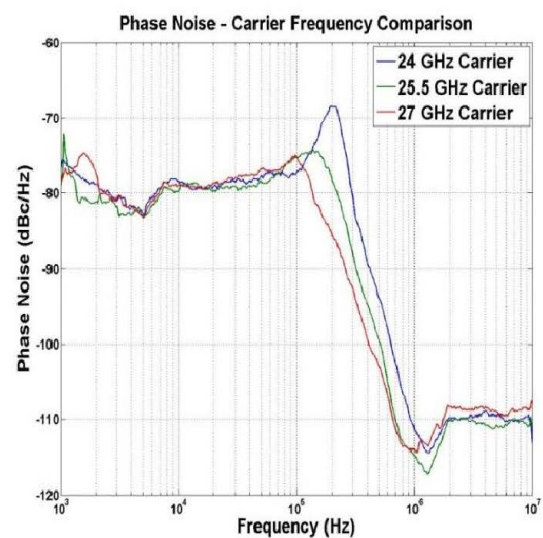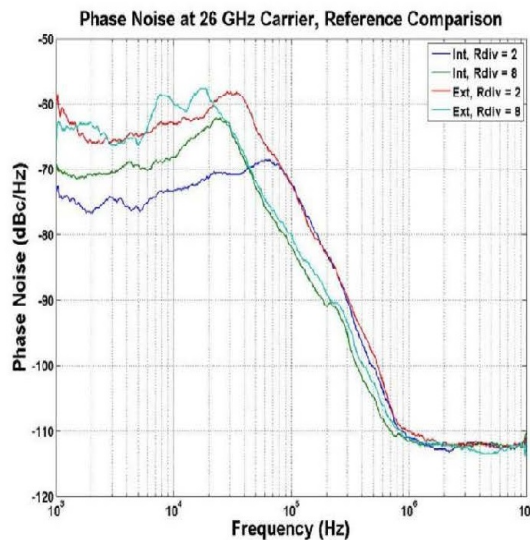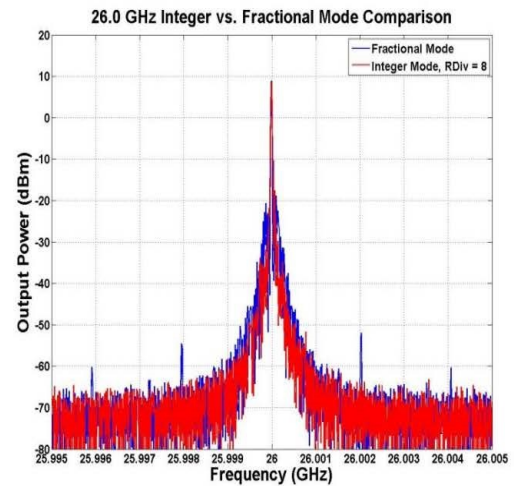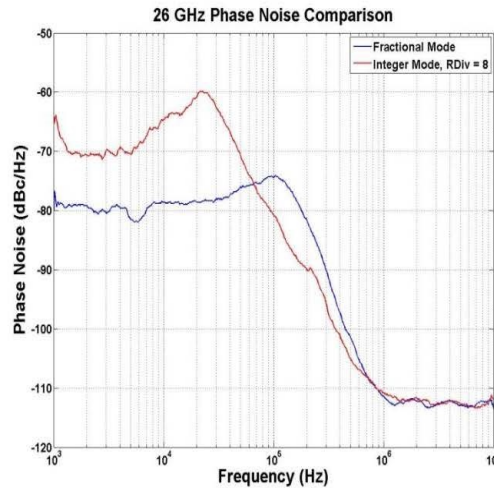


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 24 GHz to 27 GHz Output, SMA PE11S3905](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3905

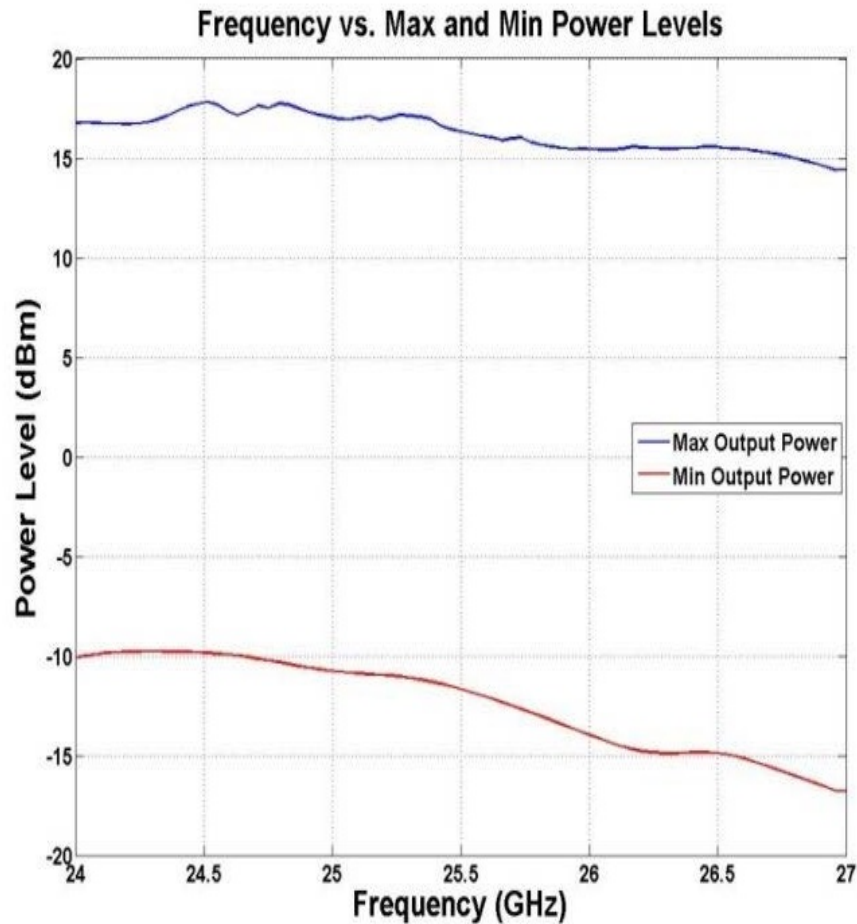





Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 24 GHz to 27 GHz Output, SMA PE11S3905](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3905

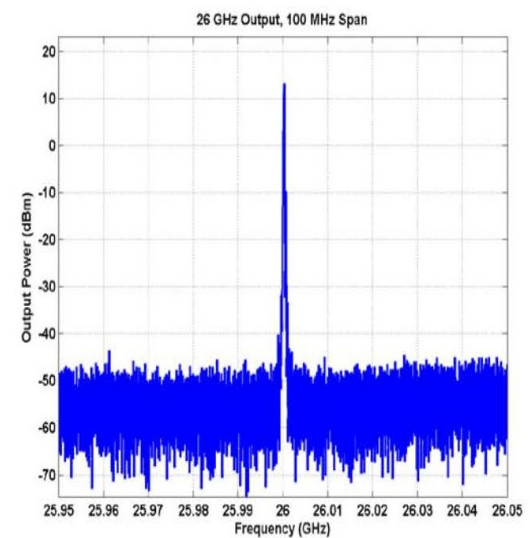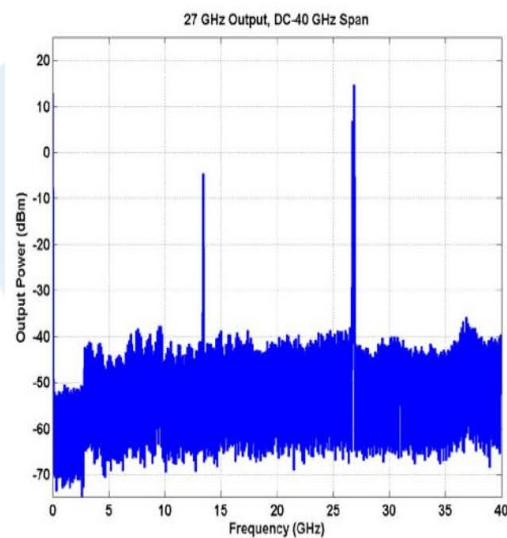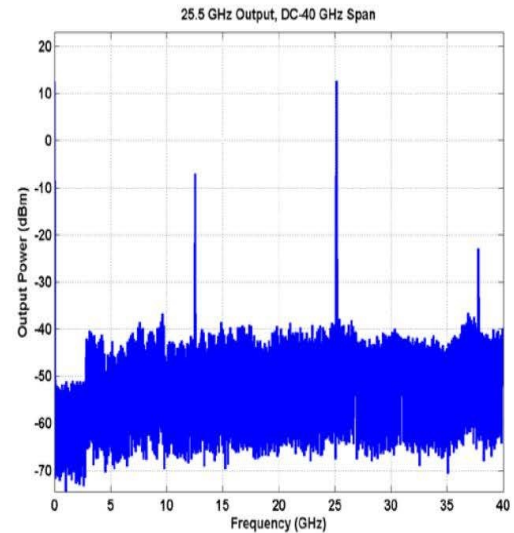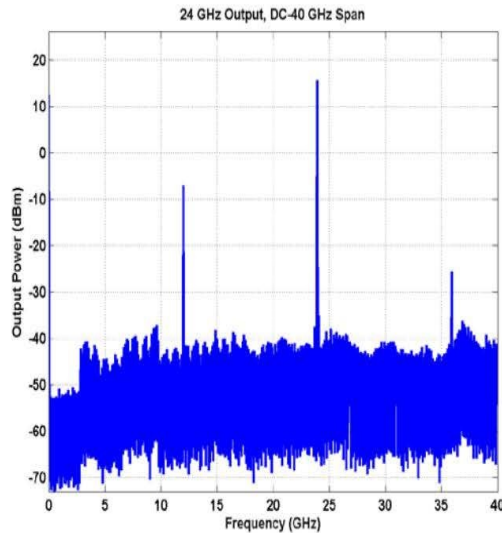



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 24 GHz to 27 GHz Output, SMA PE11S3905](#)



USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA

Synthesizers Technical Data Sheet

PE11S3905

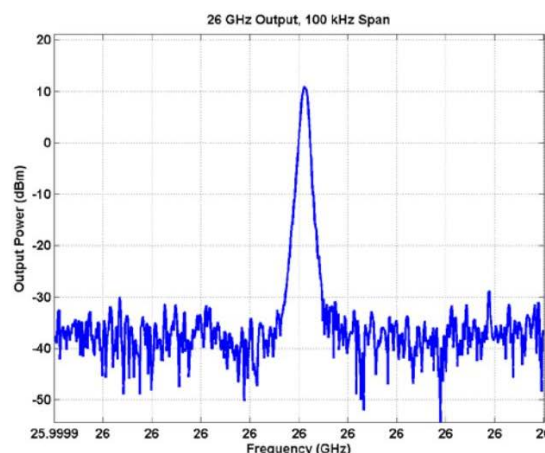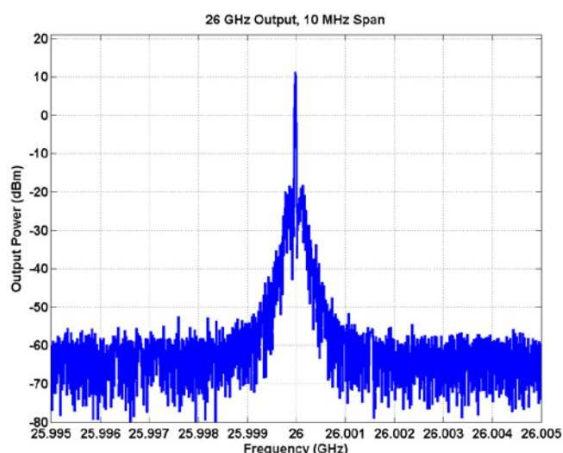

USB Frequency Synthesizer Module, Phase Locked Loop (PLL), 24 GHz to 27 GHz Output, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [USB Frequency Synthesizer Module, Phase Locked Loop \(PLL\), 24 GHz to 27 GHz Output, SMA PE11S3905](http://www.pasternack.com/usb-frequency-synthesizer-module-pll-24-27-ghz-sma-pe11s3905-p.aspx)

URL: <http://www.pasternack.com/usb-frequency-synthesizer-module-pll-24-27-ghz-sma-pe11s3905-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE11S3905 CAD Drawing

USB Frequency Synthesizer Module, Phase Locked Loop
(PLL), 24 GHz to 27 GHz Output, SMA

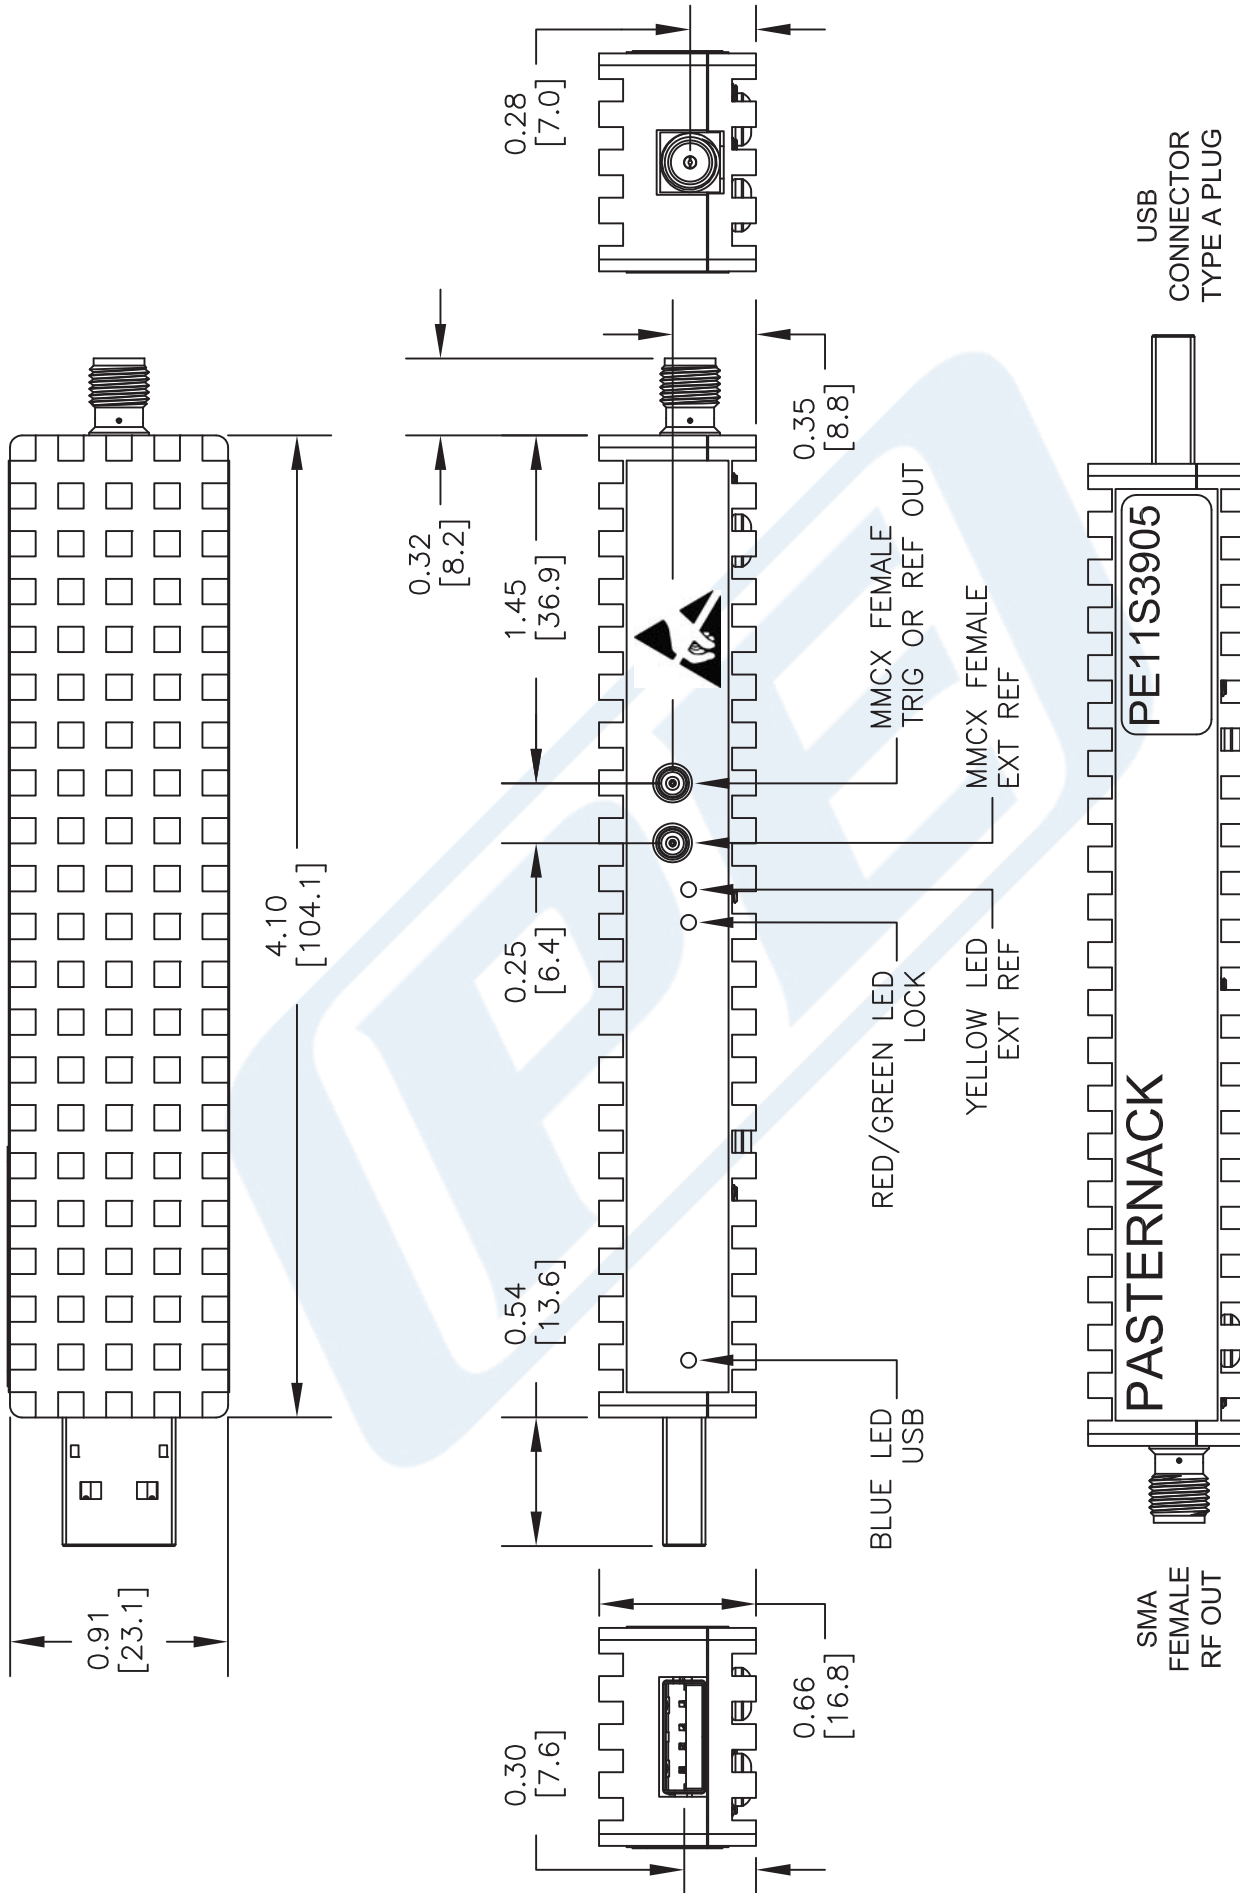

DWG TITLE

PE11S3905

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 021516

SCALE N/A

SIZE A

2233