



50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 14.5 dB Gain And 9.7 dB P1db

TECHNICAL DATA SHEET

PE1527

50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 14.5 dB Gain And 9.7 dB P1db

Configuration

Design	Low Noise Amplifier
RF Input Connector	SMA Female
RF Input Connector Impedance	50 Ohms
RF Output Connector	SMA Female
RF Output Connector Impedance	50 Ohms
DC Bias Connector	Solder Pin

Electrical Specifications

Frequency Range, GHz	0.01 to 3
Typical Gain, dB	14.5
Maximum Noise Figure, dB	3.4
Typical Noise Figure, dB	3.4
Output at 1 dB Compression Point, dBm	9.7
Operating DC Voltage, Volts	7 to 18
Maximum DC Current, mA	40

Frequency 1

Frequency, MHz	10 to 1,000
Input Return Loss, dB	-19
Output Return Loss, dB	-20
Output at 1 dB Compression Point, dBm	11.8
Gain, dB	16.3

Frequency 2

Frequency, GHz	1 to 2
Return Loss, dB	-17
Output Return Loss, dB	-15
Output at 1 dB Compression Point, dBm	11.3
Gain, dB	15.2

Frequency 3

Frequency, GHz	2 to 3
Return Loss, dB	-16
Output Return Loss, dB	-16
Output at 1 dB Compression Point, dBm	9.7
Gain, dB	12

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 14.5 dB Gain And 9.7 dB P1db PE1527](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 14.5 dB Gain And 9.7 dB P1db

TECHNICAL DATA SHEET

PE1527

Mechanical Specifications

Size

Length, in [mm]	1.38 [35.05]
Width/Dia., in [mm]	1.18 [29.97]
Height, in [mm]	0.5 [12.7]
Body Material and Plating	Aluminum

RF Input Connector

Type	SMA Female
------	------------

RF Output Connector

Type	SMA Female
------	------------

DC Bias Connector

Type	Solder Pin
------	------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 14.5 dB Gain And 9.7 dB P1db from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 14.5 dB Gain And 9.7 dB P1db PE1527](http://www.pasternack.com/50-ohm-sma-amplifier-10-mhz-3-ghz-14.5-db-gain-pe1527-p.aspx)

URL: <http://www.pasternack.com/50-ohm-sma-amplifier-10-mhz-3-ghz-14.5-db-gain-pe1527-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE1527 CAD Drawing

50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 14.5 dB Gain And 9.7 dB P1db

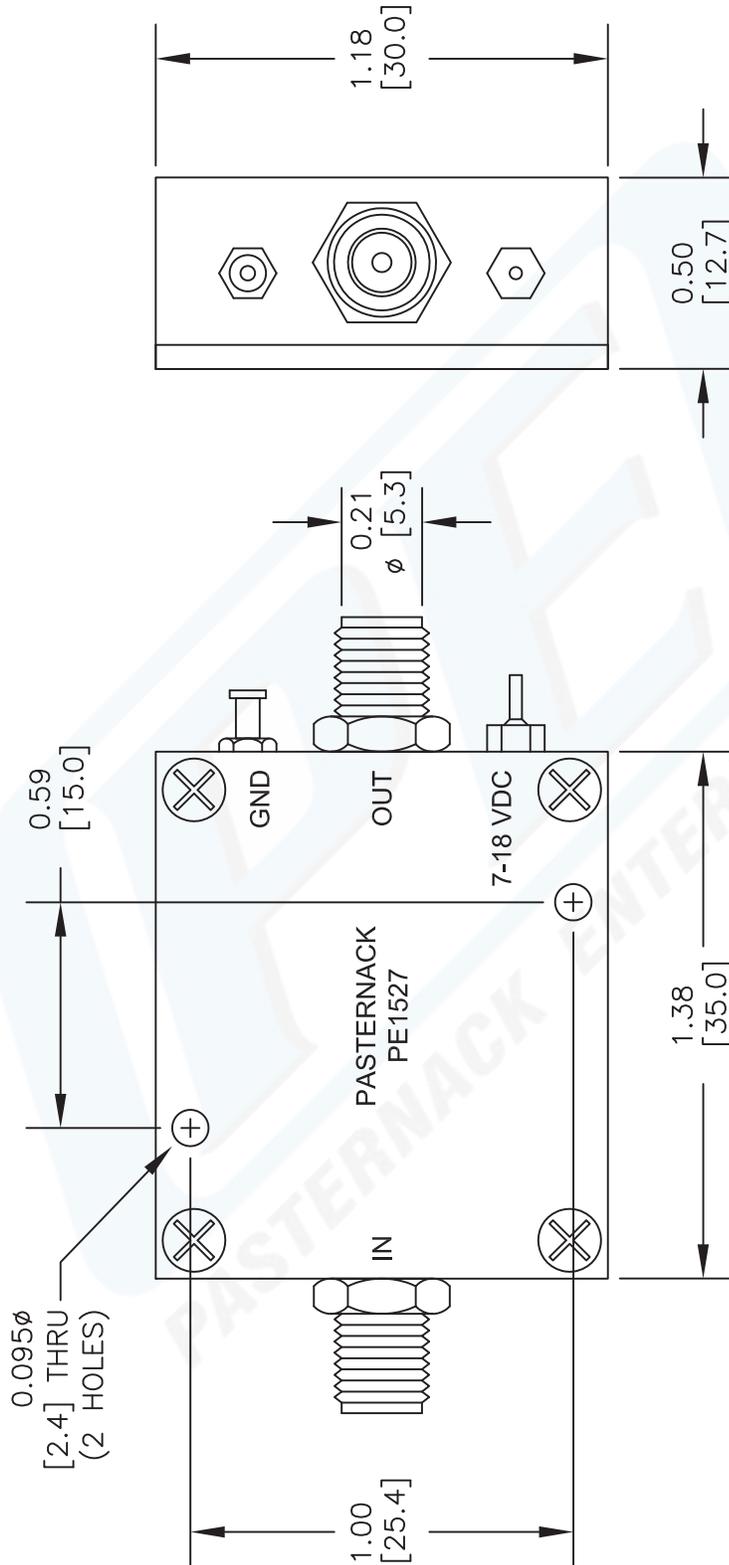

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE1527

FSCM NO. 53919

CAD FILE 111413

SCALE N/A

SIZE A

2233

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com