

SMA Female Right Angle Connector Solder Attachment 2 Hole Flange Mount Pin Terminal, .481 inch Hole Spacing



RF Connectors Technical Data Sheet

PE44593

Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms
- Right Angle Body Geometry

Features

• Gold Plated Contact

Applications

General Purpose Test

Pin Interface Type

Solder Attachment

Contact plating according to MIL-G-45204

• 2 Hole Flange

Rack and Panel Mount Applications

Description

Pasternack's PE44593 SMA female right angle connector solder attachment 2 hole flange mount pin terminal, .481 inch hole spacing is part of our full line of RF components available for same-day shipping. Its right angle body geometry allows for easier connections in tight spaces. This SMA 2 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SMA female right angle 2 hole flange connector PE44593 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable connector assemblies for you and ship same-day.

Mechanical Specifications

Size	
Length	0.905
Width/Dia.	0.625
Height	0.598
Weight	0.015

Material Specifications

Description	Material	Plating
Contact		Gold MIL-G-45204
Insulation	PTFE	
Body	Brass	Gold MIL-G-45204

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Right Angle Connector Solder Attachment 2 Hole Flange Mount Pin Terminal, .481 inch Hole Spacing PE44593

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



SMA Female Right Angle Connector Solder Attachment 2 Hole Flange Mount Pin Terminal, .481 inch Hole Spacing

RF Connectors Technical Data Sheet

Environmental Specifications Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data Notes:

SMA Female Right Angle Connector Solder Attachment 2 Hole Flange Mount Pin Terminal, .481 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Right Angle Connector Solder Attachment 2 Hole Flange Mount Pin Terminal, .481 inch Hole Spacing PE44593

URL: https://www.pasternack.com/sma-female-standard-pin-terminal-connector-pe44593-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451


Sales@Pasternack.com • Techsupport@Pasternack.com





PE44593 CAD Drawing

SMA Female Right Angle Connector Solder Attachment 2 Hole Flange Mount Pin Terminal, .481 inch Hole Spacing

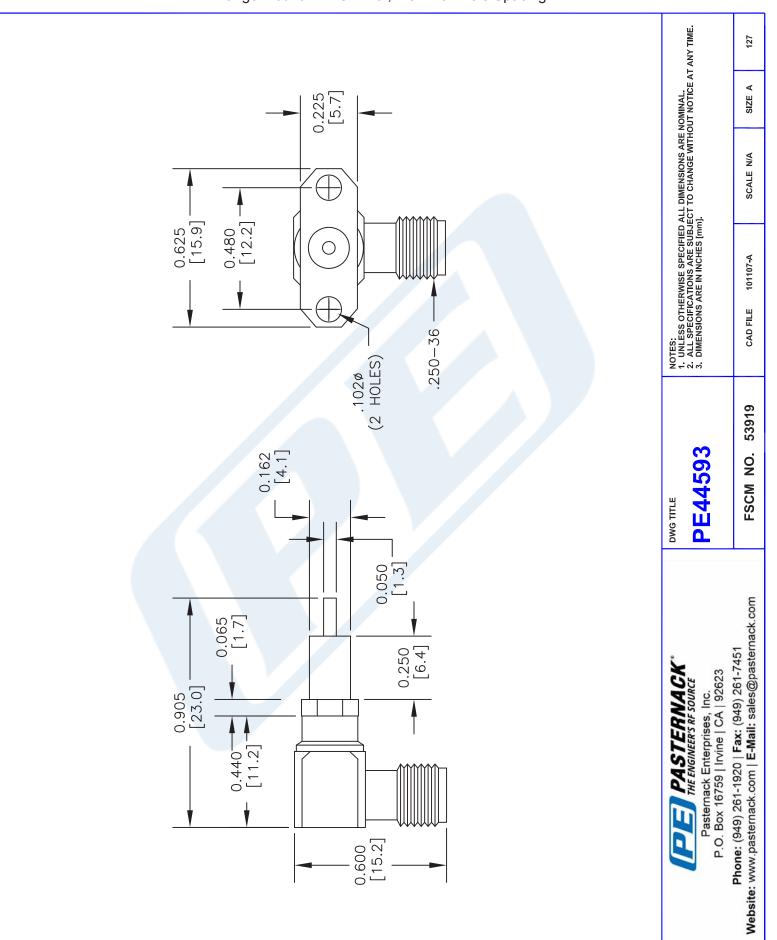

3