



75 Ohm BNC Male to Straight Cut Lead
Cable Using 75 Ohm RG187 Coax

RF Cable Assemblies Technical Data Sheet


PE39599

Configuration

- Connector 1: BNC Male
- Connector 2: Straight Cut Lead
- Cable Type: RG187

Features

- Max Frequency 3 GHz
- 69.5% Phase Velocity
- PTFE Jacket

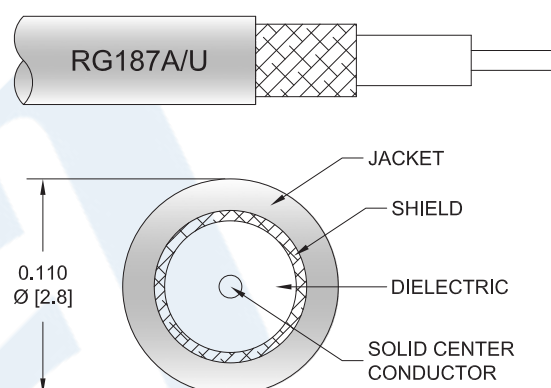

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE39599 75 ohm BNC male to straight cut lead cable using 75 ohm RG187 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. The PE39599 BNC male to straight cut lead cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Male to Straight Cut Lead Cable Using 75 Ohm RG187 Coax PE39599](#)



75 Ohm BNC Male to Straight Cut Lead
Cable Using 75 Ohm RG187 Coax

RF Cable Assemblies Technical Data Sheet

PE39599

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
Velocity of Propagation		69.5		%
Capacitance		22 [72.18]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	400					MHz
Insertion Loss (Typ.)	21					dB/ft
	68.9					dB/m

Mechanical Specifications

Cable Assembly

Weight 0.024 lbs [10.89 g]

Cable

Cable Type RG187
Impedance 75 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Silver Plated Copper Braid
Jacket Material PTFE, White
Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Male to Straight Cut Lead Cable Using 75 Ohm RG187 Coax PE39599](#)



75 Ohm BNC Male to Straight Cut Lead
Cable Using 75 Ohm RG187 Coax

RF Cable Assemblies Technical Data Sheet

PE39599

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	Straight Cut Lead
Impedance	75 Ohms	0 Ohms
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	30μ in. minimum	
Dielectric Type	Teflon	
Body Material and Plating	Brass, Nickel	
Body Plating Specification	100μ in. minimum	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Male to Straight Cut Lead Cable Using 75 Ohm RG187 Coax PE39599](#)



75 Ohm BNC Male to Straight Cut Lead Cable Using 75 Ohm RG187 Coax

RF Cable Assemblies Technical Data Sheet

PE39599

How to Order

Part Number Configuration:

PE39599

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE39599-12 = 12 inches long cable
PE39599-100cm = 100 cm long cable

75 Ohm BNC Male to Straight Cut Lead Cable Using 75 Ohm RG187 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Male to Straight Cut Lead Cable Using 75 Ohm RG187 Coax PE39599](#)


URL: <https://www.pasternack.com/bnc-male-straight-cut-sexless-rg187au-cable-assembly-pe39599-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE39599 CAD Drawing

75 Ohm BNC Male to Straight Cut Lead Cable Using 75 Ohm RG187 Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/16/2020	S.ELLIS

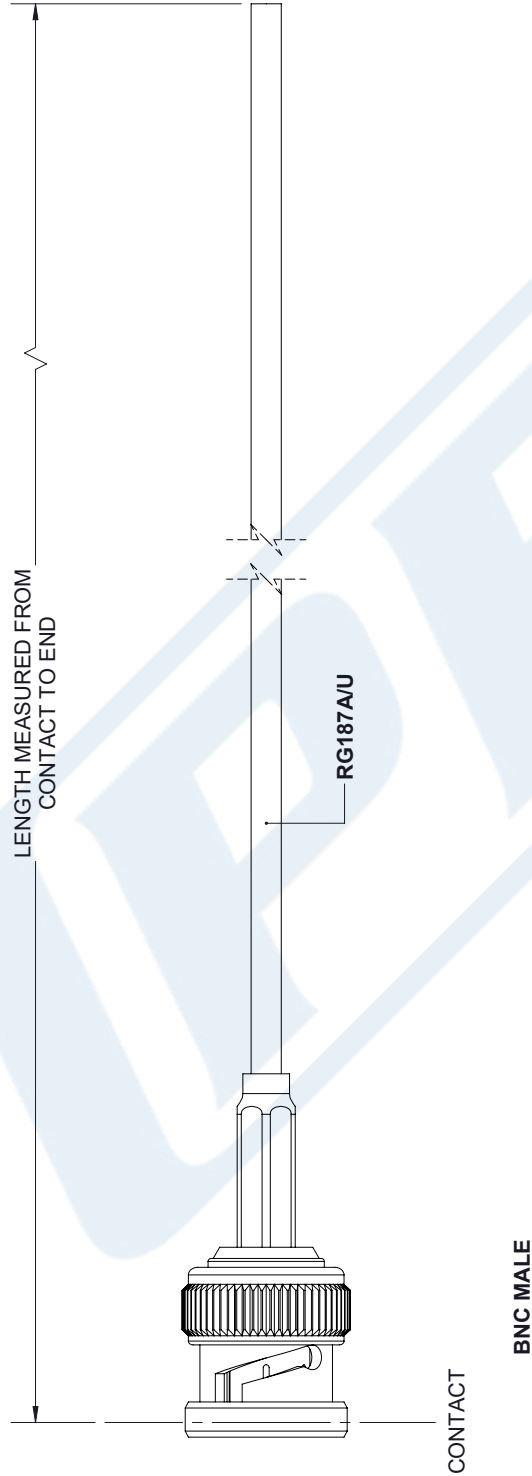

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: <table border="0"> <tr> <td>.X = ± .2</td> <td>[.08]</td> <td>FRACTIONS</td> </tr> <tr> <td>.XX = ± .02</td> <td>[.51]</td> <td>± 1/32</td> </tr> <tr> <td>.XXX = ± .005</td> <td>[.13]</td> <td>ANGLES ± 1°</td> </tr> </table> CABLE LENGTH (L) TOLERANCES: <table border="0"> <tr> <td>L ≤ 12 [305]</td> <td>= +1 [25] / -0</td> </tr> <tr> <td>12 [305] < L ≤ 60 [1524]</td> <td>= +2 [51] / -0</td> </tr> <tr> <td>60 [1524] < L ≤ 120 [3048]</td> <td>= +4 [102] / -0</td> </tr> <tr> <td>120 [3048] < L ≤ 300 [7620]</td> <td>= +6 [152] / -0</td> </tr> <tr> <td>300 [7620] < L =</td> <td>+5% L / -0</td> </tr> </table> ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		.X = ± .2	[.08]	FRACTIONS	.XX = ± .02	[.51]	± 1/32	.XXX = ± .005	[.13]	ANGLES ± 1°	L ≤ 12 [305]	= +1 [25] / -0	12 [305] < L ≤ 60 [1524]	= +2 [51] / -0	60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0	120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0	300 [7620] < L =	+5% L / -0	PE PASTERNAK an INFINITI® brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com	
.X = ± .2	[.08]	FRACTIONS																				
.XX = ± .02	[.51]	± 1/32																				
.XXX = ± .005	[.13]	ANGLES ± 1°																				
L ≤ 12 [305]	= +1 [25] / -0																					
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0																					
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0																					
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0																					
300 [7620] < L =	+5% L / -0																					
THIRD-ANGLE PROJECTION	THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.	SHEET 1 OF 1	SCALE N/A																			
SIZE A	CAGE CODE 53919	DRAWN BY K.DANG	ITEM NO. PE39599																			
			REV A																			

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.