

Fire Rated SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-FR Coax



PE3W18136

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male
- Cable Type: LMR-240-FR
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- FRPE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W18136 SMA male right angle to SMA male cable using LMR-240-FR coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-FR coax. The PE3W18136 SMA male to SMA male cable assembly operates to 8 GHz. The right angle SMA interface on the LMR-240-FR cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]

Fire Rated SMA Male Right Angle to SMA Male
Low Loss Cable Using LMR-240-FR Coax



PE3W18136

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			5,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency					MHz	
PE3W18136	Custom Lengths Available	Insertion Loss (Typ.)	0.055	0.079	0.115	0.161	0.243	dB/ft	
			0.19	0.26	0.38	0.53	0.8	dB/m	
PE3W18136-12	12 In	Insertion Loss (Typ.)	0.36	0.38	0.42	0.47	0.55	dB	0.075
PE3W18136-24	24 In	Insertion Loss (Typ.)	0.41	0.46	0.53	0.63	0.79	dB	0.114
PE3W18136-36	36 In	Insertion Loss (Typ.)	0.47	0.54	0.65	0.79	1.03	dB	0.153
PE3W18136-48	48 In	Insertion Loss (Typ.)	0.52	0.62	0.76	0.95	1.28	dB	0.192
PE3W18136-60	60 In	Insertion Loss (Typ.)	0.58	0.7	0.88	1.11	1.52	dB	0.231

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.075 pounds
Additional Weight per Inch:	0.00325 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.075 lbs [34.02 g]

Cable

Cable Type	LMR-240-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	Foam PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper
Jacket Material	FRPE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Fire Rated SMA Male Right Angle to SMA Male
Low Loss Cable Using LMR-240-FR Coax



PE3W18136

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Mating Cycles		500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	3 µin minimum	
Coupling Nut Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Plating Specification	3 µin minimum	
Hex Size	5/16 inch	5/16 inch
Torque	3 in-lbs 0.34 Nm	3 in-lbs 0.34 Nm

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


Fire Rated SMA Male Right Angle to SMA Male
Low Loss Cable Using LMR-240-FR Coax



PE3W18136

Typical Performance Data

How to Order

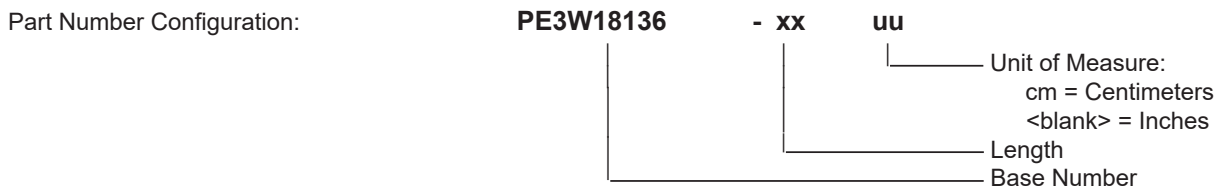

Example: PE3W18136-12 = 12 inches long cable
 PE3W18136-100cm = 100 cm long cable

Fire Rated SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-FR Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-FR Coax PE3W18136](#)

URL: <https://www.pasternack.com/fire-rated-sma-male-right-angle-to-sma-male-low-loss-cable-using-lmr-240-fr-pe3w18136-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W18136 CAD Drawing

Fire Rated SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-FR Coax

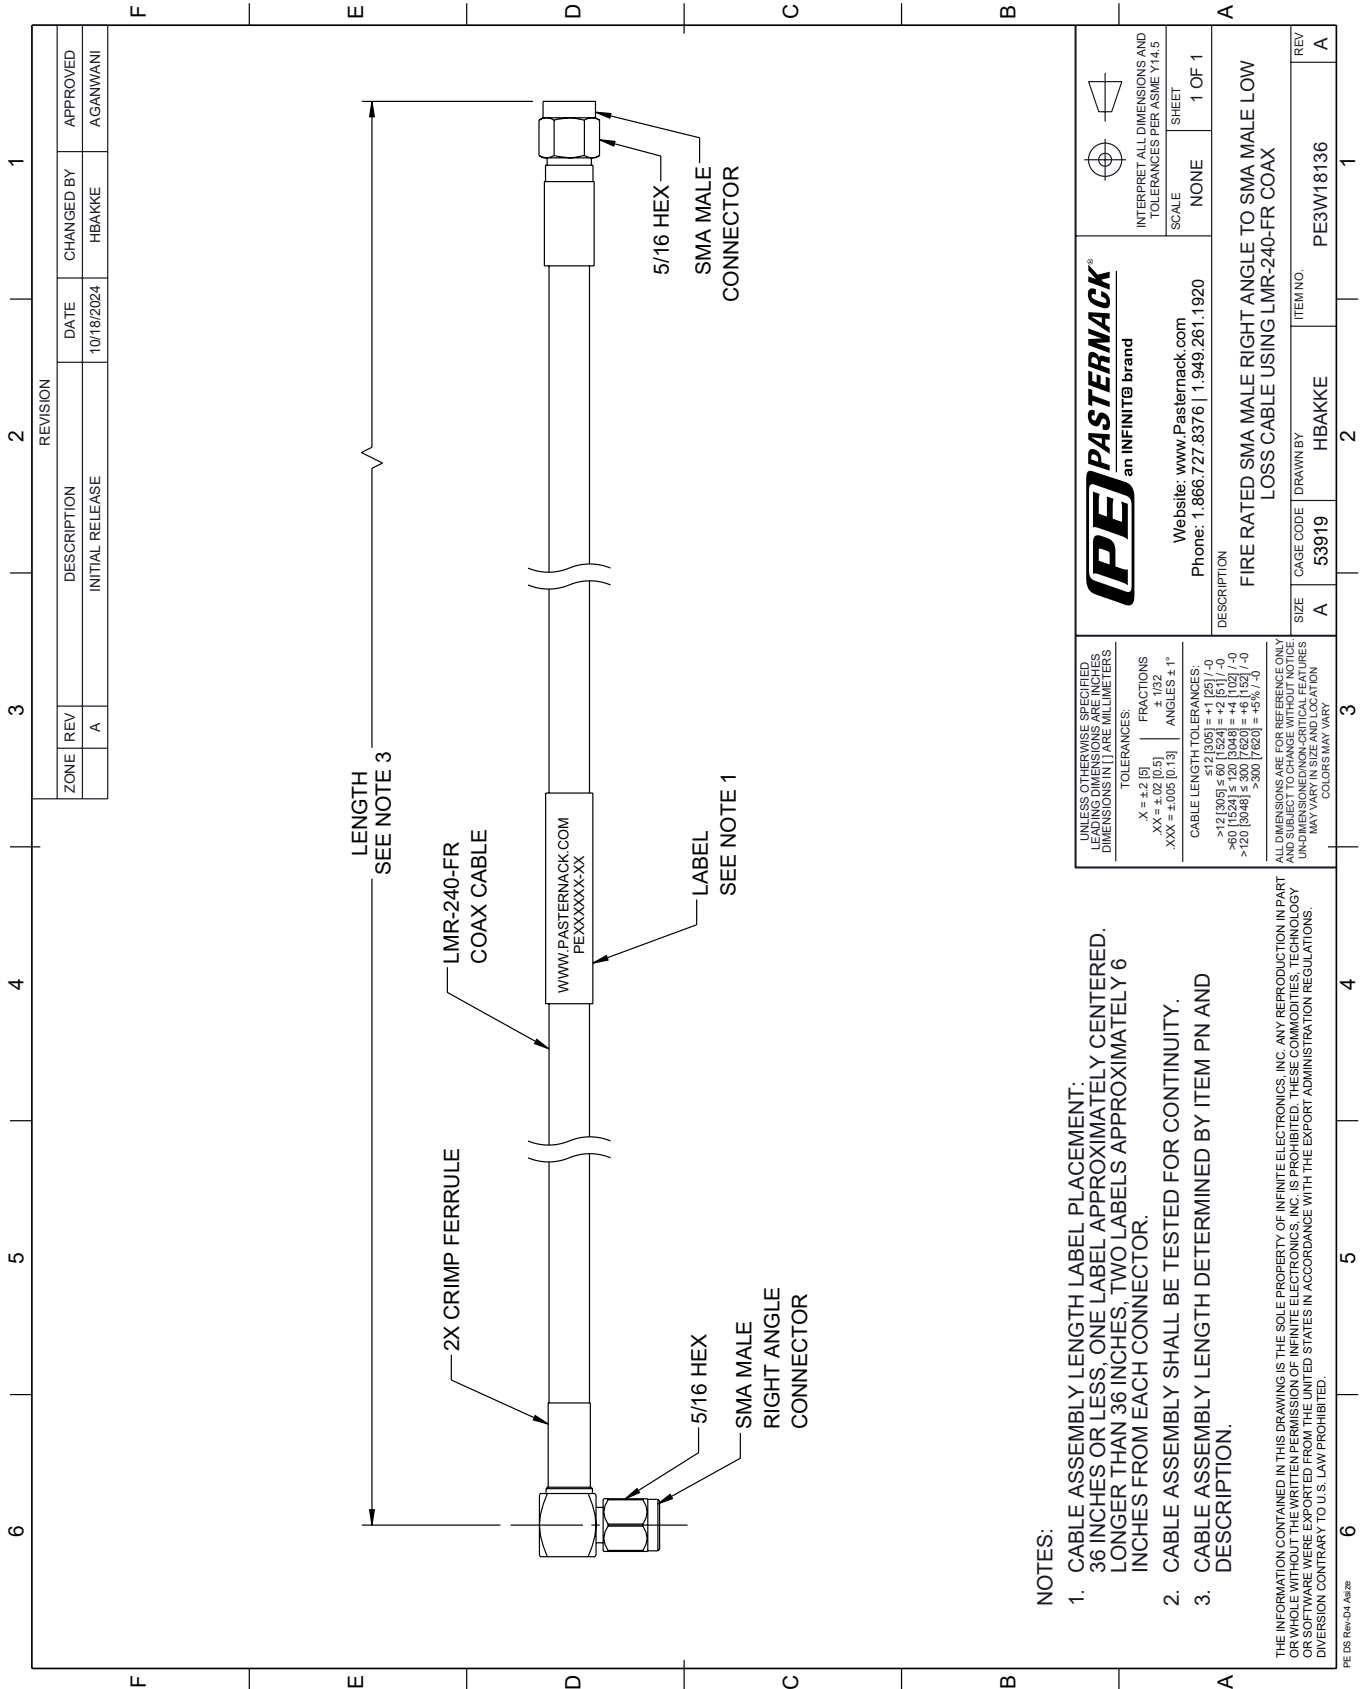

REVISION		DATE	CHANGED BY	APPROVED
ZONE	REV			
	A	10/18/2024	HBAKKE	AGANWANI
DESCRIPTION				
INITIAL RELEASE				

PE PASTERNAK
an INFINITE brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE
SHEET: 1 OF 1

DESCRIPTION: FIRE RATED SMA MALE RIGHT ANGLE TO SMA MALE LOW LOSS CABLE USING LMR-240-FR COAX

SIZE	A	CAGE CODE	53919	DRAWN BY	HBAKKE	ITEM NO.	PE3W18136
REV	A						

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND TRAILING DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES:

X = ±.2 [5]	FRACTIONS	± 1/32
.XX = ±.02 [0.5]		± 1/64
.XXX = ±.005 [0.13]	ANGLES ± 1°	

CABLE LENGTH TOLERANCES:

>12 [305] ≤ 60 [1524] = ±.125 [-0]
>60 [1524] ≤ 120 [3048] = ±.150 [-0]
>120 [3048] ≤ 300 [7620] = ±.187 [-0]
>300 [7620] = ±.25 [-0]

ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS OF CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

- NOTES:
- CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
 - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICES ARE BEING EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.