

WR-28 Waveguide Direct Read Attenuator, 0 to 50 dB, From 26.5 GHz to 40 GHz, UG-599/U Square Cover Flange, Dial



PE-W28AT5001

Features

- WR-28
- 26.5 to 40 GHz
- 0 to 50 dB minimum attenuation range
- Stable base with height adjustable feet (1/2 inch)
- UG-599/U Flange
- 1.15:1 Maximum VSWR
- 2% attenuation accuracy over most of the attenuation range.
- 0.5 Watt Maximum Power
- Easy to read drum scale

Applications

- Instrumentation
- System Calibration
- Research and Development
- Test Benches

Description

The PE-W28AT5001 is a continuously variable attenuator that has “direct read” capability which allows the user to dial-in the amount of attenuation needed to within 2% accuracy over most of the attenuation range. Designed for the WR-28 frequency range (26.5 to 40 GHz), it is constructed using a precision rotary resistive vane in a circular waveguide. The attenuation level is stable, highly repeatable and accurate across the full frequency and attenuation range. This attenuator is ideal for precision measurements in demanding applications like instrumentation and system calibration.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	26.5		40	GHz
Attenuation	0		50	dB
Accuracy %		±2	±4	%
VSWR			1.15:1	
Insertion Loss			0.5	dB
Input Power, CW			0.5	Watts

Attenuation Accuracy

Description	F1	F2	F3	F4	F5	Units
Attenuation Setting	10	20	30	40	50	dB
Accuracy	±0.2	±0.4	±0.6	±1.6	±2	dB

Electrical Specification Notes:

Attenuation Accuracy is 0.1 dB or 2% of reading, whichever is greater, to 40 dB and 4% of reading from 40 dB to 50 dB.

Maximum attenuation setting is 60 dB

Mechanical Specifications

Size

Length	4.75 in [120.65 mm]
Width	6.87 in [174.5 mm]
Height	0 in [0 mm]
Weight	3.14 lbs [1.42 kg]

WR-28 Waveguide Direct Read Attenuator, 0 to 50 dB, From 26.5 GHz to 40 GHz, UG-599/U Square Cover Flange, Dial



PE-W28AT5001

Tuner Body Material and Plating
Tuner Finish

Aluminum
Black

Configuration

Connectors

Description	Flange 1	Waveguide	Flange 2
Designation	UG-599/U	WR-28	UG-599/U
Type	Square Cover		Square Cover
Material	Brass	Brass	Brass
Plating	Gold	Gold	Gold
Plating Specification	ASTMB488	ASTMB488	ASTMB488
Finish	Gold	Gold	Gold

Environmental Specifications

Temperature

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


WR-28 Waveguide Direct Read Attenuator, 0 to 50 dB, From 26.5 GHz to 40 GHz, UG-599/U Square Cover Flange, Dial from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 Waveguide Direct Read Attenuator, 0 to 50 dB, From 26.5 GHz to 40 GHz, UG-599/U Square Cover Flange, Dial PE-W28AT5001](#)

URL: <https://www.pasternack.com/50-db-waveguide-direct-read-attenuators-wr-28-40-ghz-pe-w28at5001-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

WR-28 Waveguide Direct Read Attenuator, 0 to 50 dB, From 26.5 GHz to 40 GHz, UG-599/U Square Cover Flange, Dial

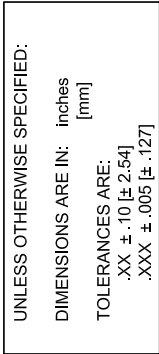

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE

PE-W28AT5001

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

CAD FILE 120415

FSCM NO. 53919

SIZE A

2233