



## 3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard

### Noise Generators Technical Data Sheet

PE85N1007

#### Features

- 10 MHz to 26 GHz Bandwidth
- Calibrated Frequencies: 1 GHz steps
- ENR output: 13 dB min
- Typical Flatness +/- 1.5 dB
- Excellent Stability
- Noise Output Temperature Variation: <0.01 dB/°C
- Noise Output Variation <0.1 dB/%V
- Rugged Package Design supports output Female SMA connector
- Designed to meet MIL-STD-202F environmental test conditions
- Calibrated Precision Noise Source
- VSWR < 1.35:1
- Output Noise ENR 15 dB typical
- Highly Stable and Accurate Performance
- Maximum Reverse Power 1 Watt
- Internal Voltage Regulation

#### Applications

- Noise Figure Measurements
- Built-In Test equipment for signal strength calibrators and radar applications
- Automatic Test Equipment (ATE)
- Jamming
- Baseband Signal Simulation
- Additive White Gaussian Noise (AWGN) source for Error Rate Measurements
- Increase dynamic range of A/D Converters
- SATCOM for bit error rate (BER) and noise figure
- Can be used as a Jitter source.

#### Description

The PE85N1007 is a coaxial packaged calibrated precision Noise Source module which operates over a wide frequency range from 0.01 GHz to 18 GHz. The design features very low VSWR < 1.35:1 that significantly increases measurement accuracy and is ideal for Noise Figure measurements and built-in applications. This model operates at +28 Vdc and features an output ENR level ranging from 13 to 17 dB with 10 MHz calibration points every GHz. Highly stable and accurate performance is specified over -55°C to +85°C with Noise Output Temperature Variation <0.009 dB/°C and Noise Output Variation < 0.002 dB/%V. Maximum Reverse Power is 1 Watt. The rugged industry standard profile package design supports an input Female BNC connector for DC bias and an output Male 3.5mm connector. Additionally, the model is designed to meet a variety of demanding MIL-STD-202F environmental test conditions including Humidity, Thermal Shock, and Vibration for added confidence for highly reliable operation.

#### Electrical Specifications

##### RF Characteristics

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.01		26	GHz
Impedance		50		Ohms
Output ENR	13		17	dB
Flatness		±1.5		dB
Output Variation vs Input Voltage			0.002	dB/%V
Output Variation vs Temperature			0.009	dB/deg C
Bias Voltage 1	22	28 ±2	30	Volts
Input Current 1			30	mA

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard PE85N1007](#)



3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard

## Noise Generators Technical Data Sheet

PE85N1007

Reverse Power	1	Watt
Calibration Points	10 MHz, every GHz	

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	0.01 to 5	5 to 18	18 to 26			GHz
VSWR, Typ	1.15:1	1.25:1	1.35:1			

### Mechanical Specifications

#### Size

Length	3.86 in [98.04 mm]
Width/Dia.	1.18 in [29.97 mm]
Height	0.8 in [20.32 mm]
Weight	0.3245 lbs [147.19 g]
Package Type	Connectorized Module

#### Connectors

DC Connector	BNC Female
Output Connector	3.5mm Male

### Environmental Specifications

#### Temperature

Operating Range	-55 to +85 deg C
Storage Range	-65 to +125 deg C

#### Environment

Humidity	MIL-STD-202F, Method 103, Cond B (96 hrs@95% R.H.)
Shock	MIL-STD-202F, Method 213, Cond B (100g, 6 msec)
Vibration	MIL-STD-202F, Method 204, Cond B (0.6" 2x ampl or 15g)
Altitude	MIL-STD-202F, Method 105, Condition B (50,000 ft)
Temperature Cycle	MIL-STD-202F, Method 105C, Condition D (5 cycles)
Thermal Shock	MIL-STD-202F, Method 107, Condition A (5 cycles)
ESD Sensitivity	ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard PE85N1007](#)



3.5mm Precision Calibrated Noise Source Module, Output ENR  
of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard

## Noise Generators Technical Data Sheet

PE85N1007

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard PE85N1007](#)




3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard

## Noise Generators Technical Data Sheet

PE85N1007

### Typical Performance Data

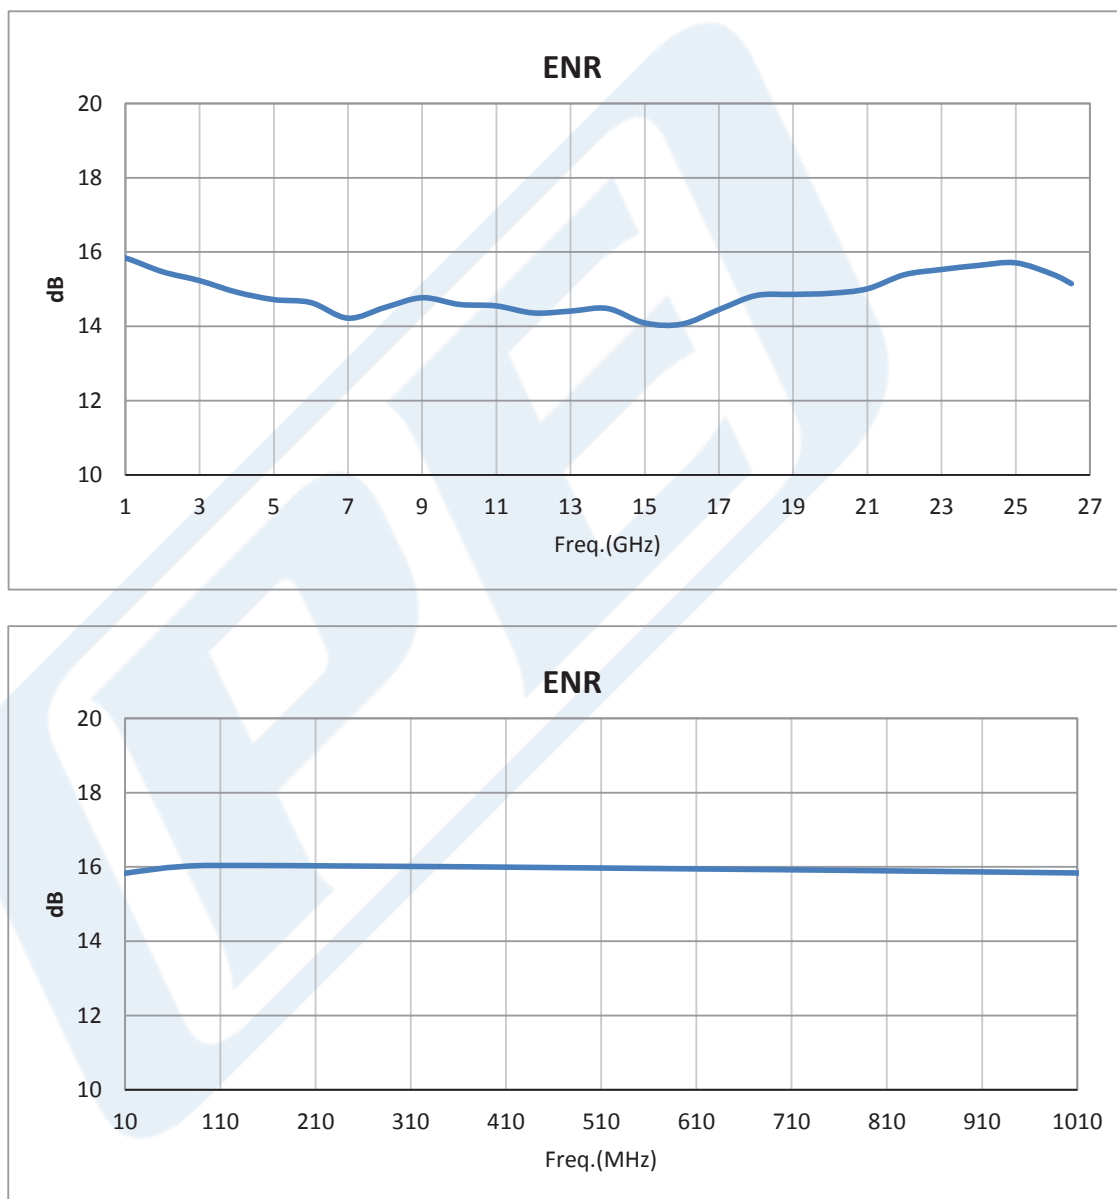



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard PE85N1007](#)



3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard

## Noise Generators Technical Data Sheet

PE85N1007

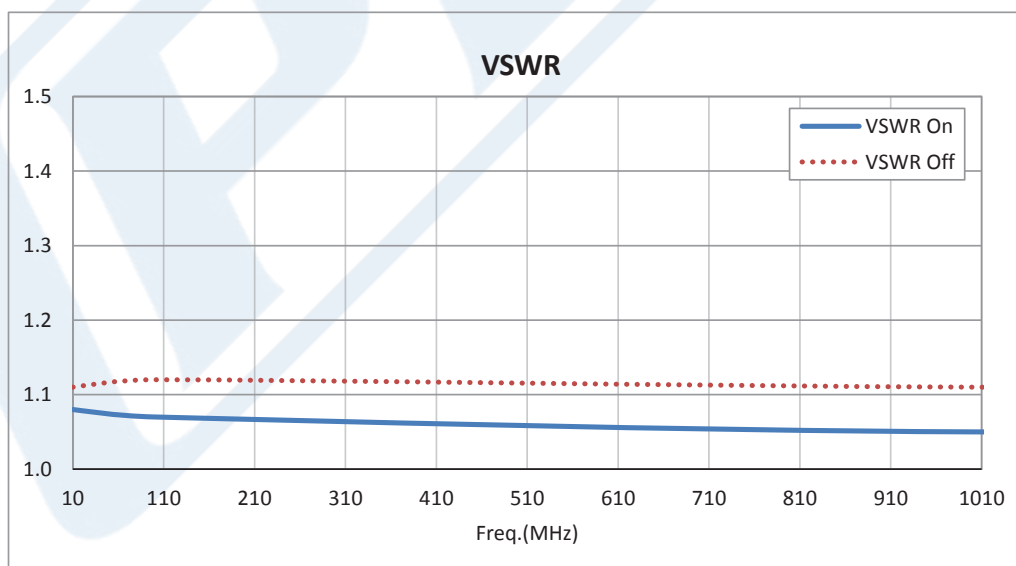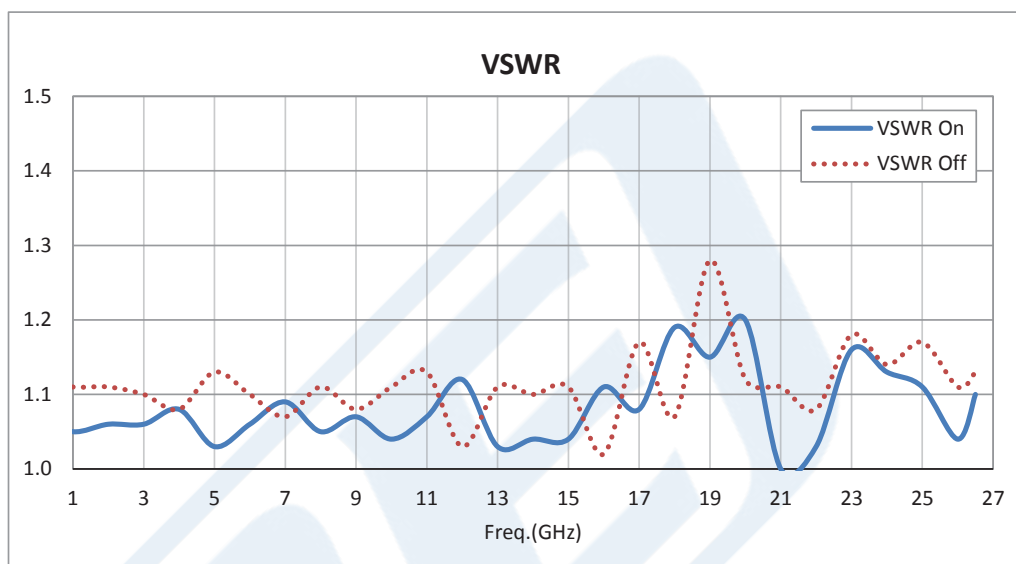

3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard PE85N1007](#)



## 3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard

### Noise Generators Technical Data Sheet

PE85N1007


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard PE85N1007](https://www.pasternack.com/3.5mm-precision-calibrated-noise-source-enr-13-db-26-ghz-pe85n1007-p.aspx)

URL: <https://www.pasternack.com/3.5mm-precision-calibrated-noise-source-enr-13-db-26-ghz-pe85n1007-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE85N1007 CAD Drawing

3.5mm Precision Calibrated Noise Source Module, Output ENR of 13 dB, +28 VDC, 10 MHz to 26 GHz, Calibration Standard

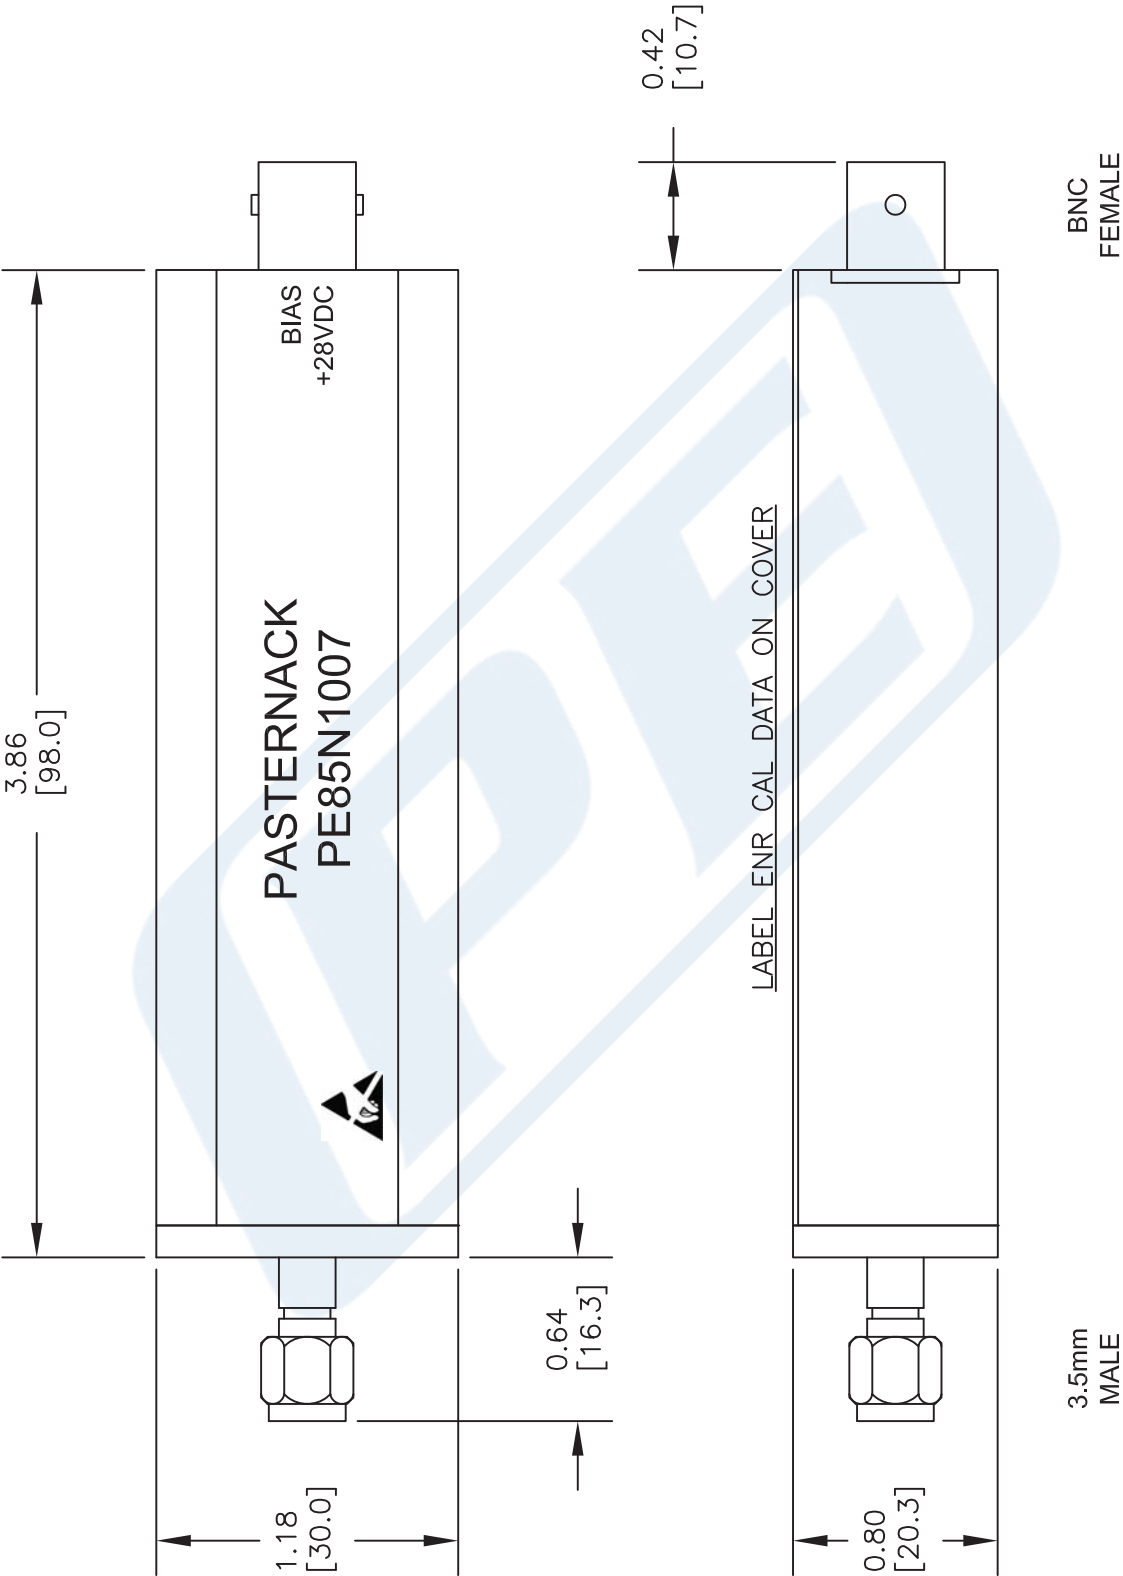

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE85N1007**

FSCM NO. 53919

CAD FILE 110515

SCALE N/A

SIZE A

2233

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com