



10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC

Bias Tees Technical Data Sheet

PE1614

Features

- 10 MHz to 4 GHz Frequency Range
- Isolation 30 dB Min
- Insertion Loss < 1.25 dB
- 2,500 mA / 100 VDC Bias

Applications

- Amplifier Biasing
- DC Return / Block
- Transmitting Power With a Single
- Coax
- Test and Measurement
- Communication Systems
- Wireless Systems

Description

Pasternack's PE1614 is an SMA bias tee (also known as bias T) that operates from 10 MHz to 4 GHz with a bias rating of 2,500 mA and 100 VDC. This bias tee is configured with SMA inputs on the RF ports and solder pin on the bias port. PE1614 SMA bias T offers good electrical performance featuring 1.25 dB max insertion loss and 30 dB min isolation.

Bias tees are typically used to inject a DC signal into an RF path such as when biasing an amplifier or any other active device, supplying power to the connected output without disrupting the RF signal. They can also be used as DC returns to provide a ground return path for the input device or DC blocks to prevent direct current signals from flowing through the output device. Pasternack's bias tees are available in various connector configurations over different frequency bands to fit your needs, all of which ship the same day.

Configuration

Design	Broadband
RF Port Connector	N Female
RF Port Connector Specification	MIL-STD-348
DC/RF Port Connector	N Female
DC Port Connector	Solder Pin
Sense Input Port Connector Specification	MIL-STD-348

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.01		4	GHz
Impedance		50		Ohms
VSWR			1.5:1	
Insertion Loss			1.25	dB
RF to Bias Isolation		30		dB
DC Voltage			100	Vdc
DC Current			2.5	A
Input Power (CW)			5	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC PE1614](#)



10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC

Bias Tees Technical Data Sheet

PE1614

Mechanical Specifications

Size

Length	2.4 in [60.96 mm]
Width	1 in [25.4 mm]
Height	1.3 in [33.02 mm]
Weight	0.176 lbs [79.83 g]

Connectors

Description	RF Port Connector	Sense Port Connector	DC Input Port Connector
Type	N Female	N Female	Solder Pin

Environmental Specifications

Temperature

Operating Range	-55 to +105 deg C
-----------------	-------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC PE1614](#)




10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC

Bias Tees Technical Data Sheet

PE1614

Typical Performance Data

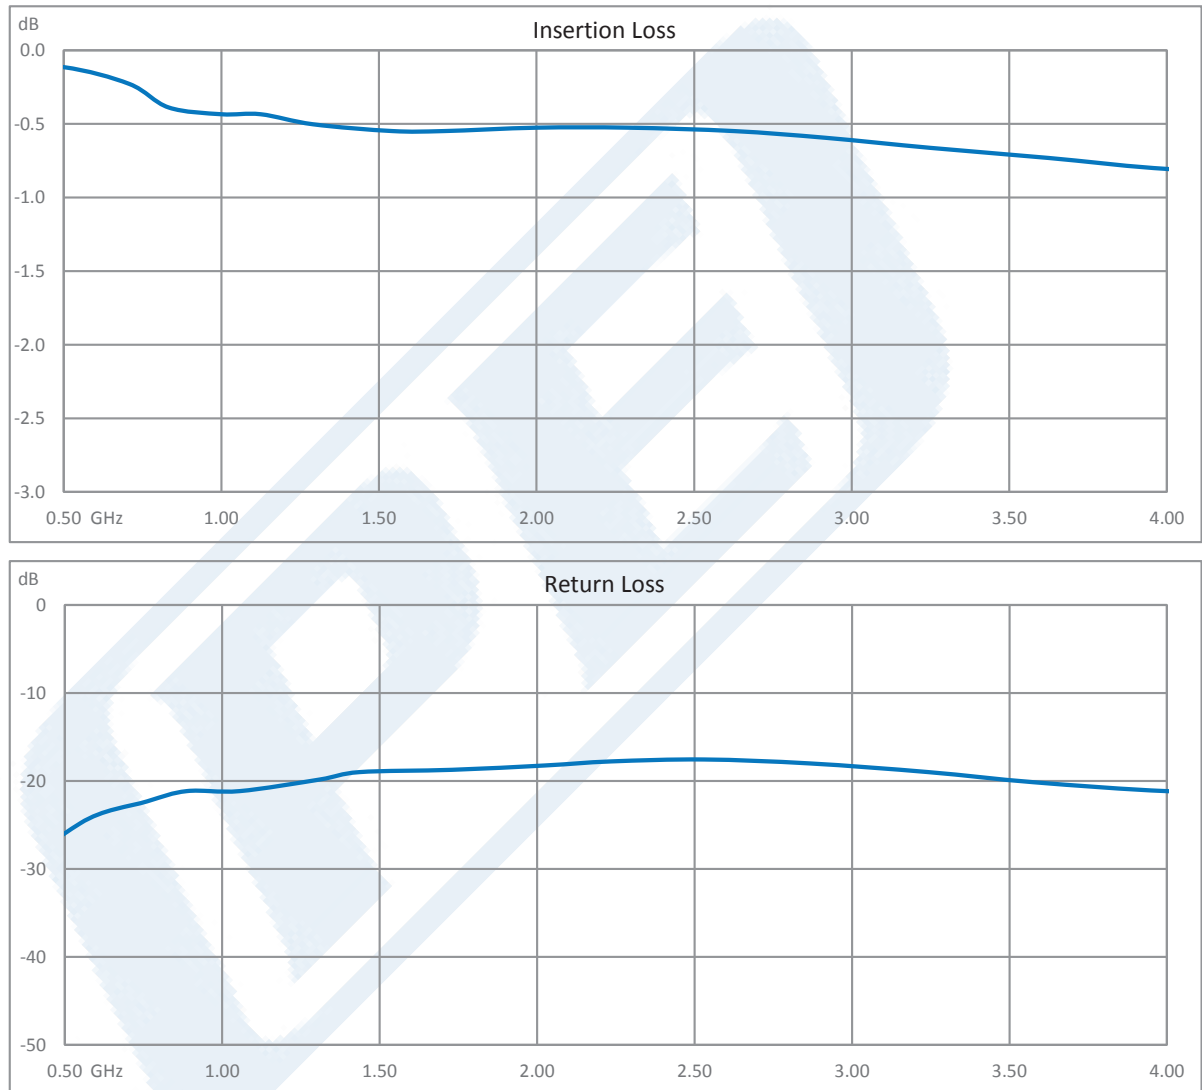

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC PE1614](#)



10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC

Bias Tees Technical Data Sheet

PE1614

10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC PE1614](https://www.pasternack.com/10-mhz-4-ghz-n-bias-tee-2500-ma-100-volts-dc-pe1614-p.aspx)

URL: <https://www.pasternack.com/10-mhz-4-ghz-n-bias-tee-2500-ma-100-volts-dc-pe1614-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE1614 CAD Drawing

10 MHz to 4 GHz N Bias Tee Rated to 2500 mA and 100 Volts DC

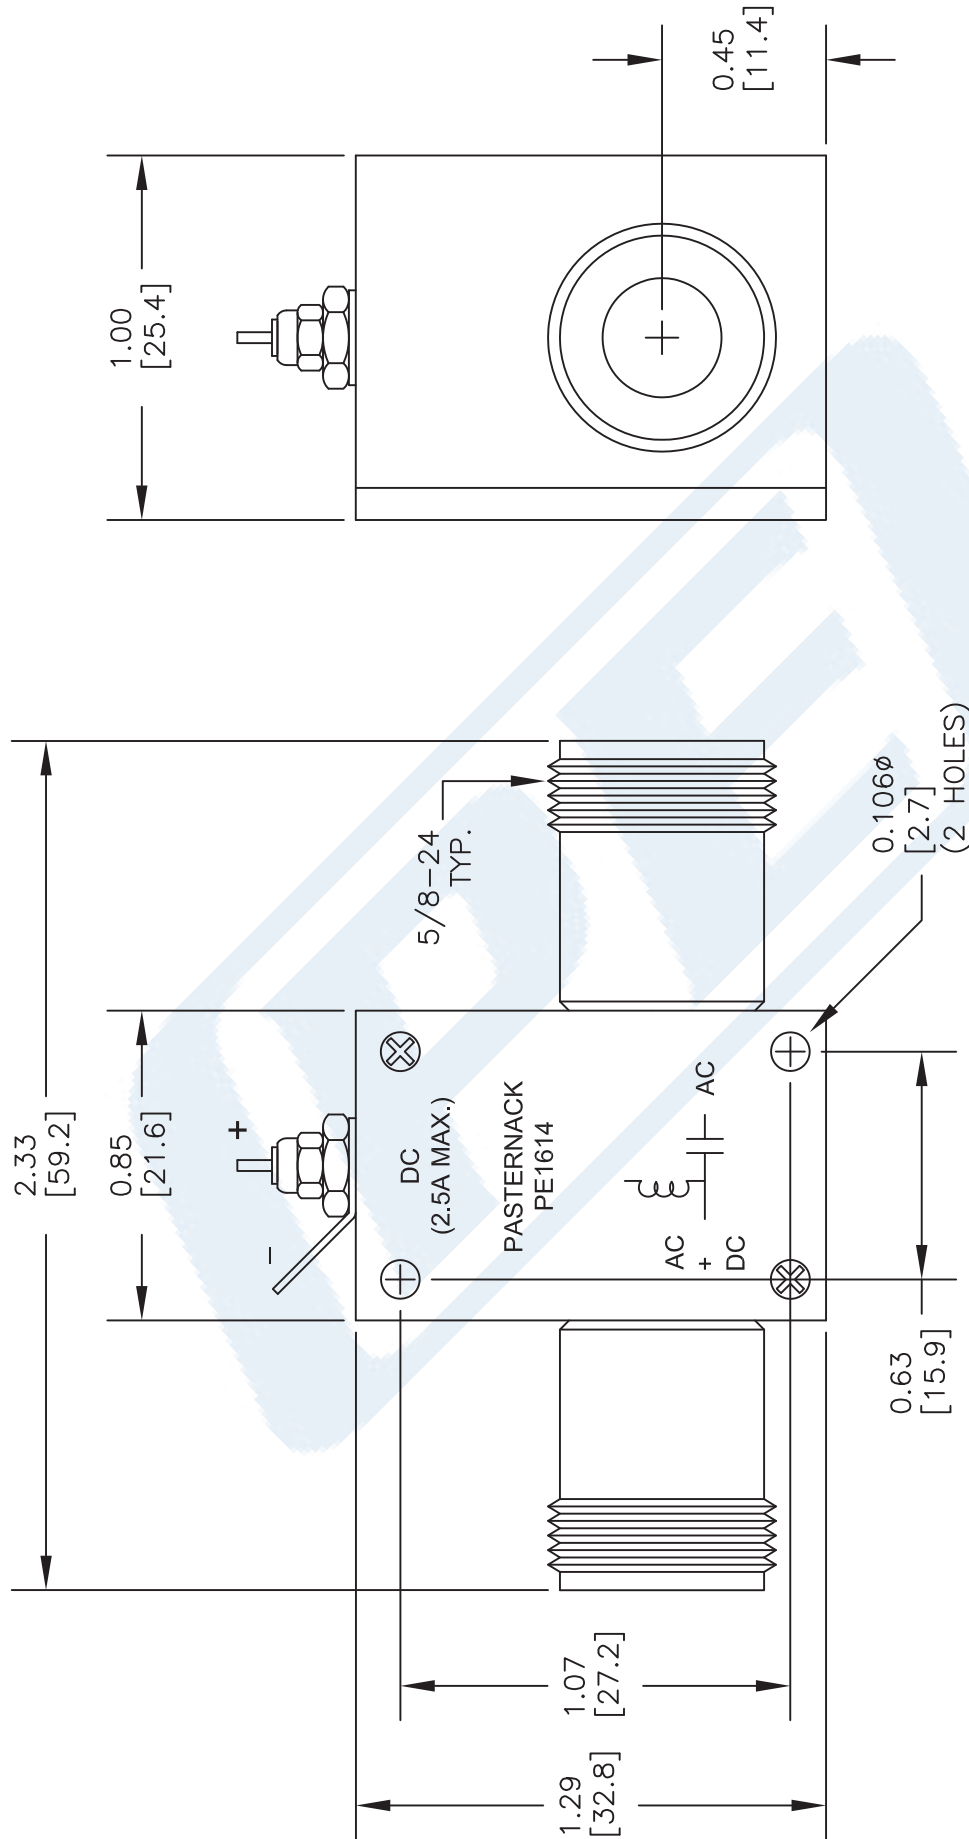

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE1614

FSCM NO. 53919

2233

SIZE A

SCALE N/A

CAD FILE 092313

PE PASTERNAK®

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com