



WR-112 Square Type Flange to End Launch SMA
Female Waveguide to Coax Adapter Operating
From 7.05 GHz to 10 GHz, H Band

Waveguide to Coax Adapters Technical Data Sheet

PE9865

Features

- H Band, 7.05 to 10 GHz Frequency Range
- WR-112 Waveguide Interface with Precision Tolerance Square Type
- SMA Female RF Interface
- Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Description

The PE9865 is a waveguide to coaxial adapter operating in the H Band with a 7.05 to 10 GHz frequency range. This adapter offers a WR-112 waveguide interface size coupled with a precision tolerance Square Type flange. The PE9865 is constructed of Aluminum to ensure durability and repeatable RF performance. The coaxial connector offered by this adapter uses SMA geometry endorsed by international Electrotechnical Commission (IEC). The SMA Female connector mates with commercially available 2.4mm connectors.

Configuration

Waveguide Size	WR-112
Flange	Square Type
RF Connector	SMA Female
Impedance	50 Ohms
Body Geometry	End Launch

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.05		10	GHz
VSWR			1.4:1	

Mechanical Specifications

Size	
Length	1.942 in [49.33 mm]
Width	1.875 in [47.63 mm]
Height	1.875 in [47.63 mm]
Weight	0.253 lbs [114.76 g]
RF Connector	
Connector Type	SMA Female
Body Material and Plating	Passivated Stainless Steel
Waveguide Interface	
Waveguide Type	WR-112
Flange Type	Square Type
Body Material and Plating	Aluminum

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Square Type Flange to End Launch SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band PE9865](#)



WR-112 Square Type Flange to End Launch SMA
Female Waveguide to Coax Adapter Operating
From 7.05 GHz to 10 GHz, H Band

Waveguide to Coax Adapters Technical Data Sheet

PE9865

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

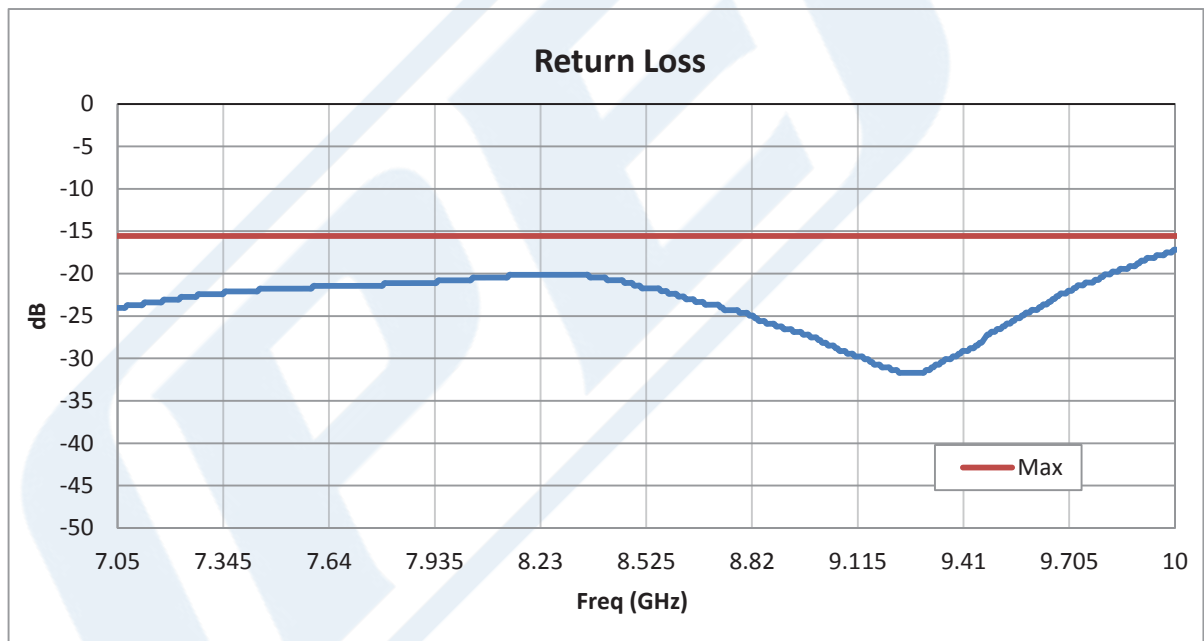

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Square Type Flange to End Launch SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band PE9865](#)



WR-112 Square Type Flange to End Launch SMA
Female Waveguide to Coax Adapter Operating
From 7.05 GHz to 10 GHz, H Band

Waveguide to Coax Adapters Technical Data Sheet

PE9865

WR-112 Square Type Flange to End Launch SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Square Type Flange to End Launch SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band PE9865](https://www.pasternack.com/wr-112-sma-female-end-launch-waveguide-coax-adapter-7.05-ghz-10-ghz-pe9865-p.aspx)

URL: <https://www.pasternack.com/wr-112-sma-female-end-launch-waveguide-coax-adapter-7.05-ghz-10-ghz-pe9865-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9865 CAD Drawing

WR-112 Square Type Flange to End Launch SMA Female Waveguide
to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band

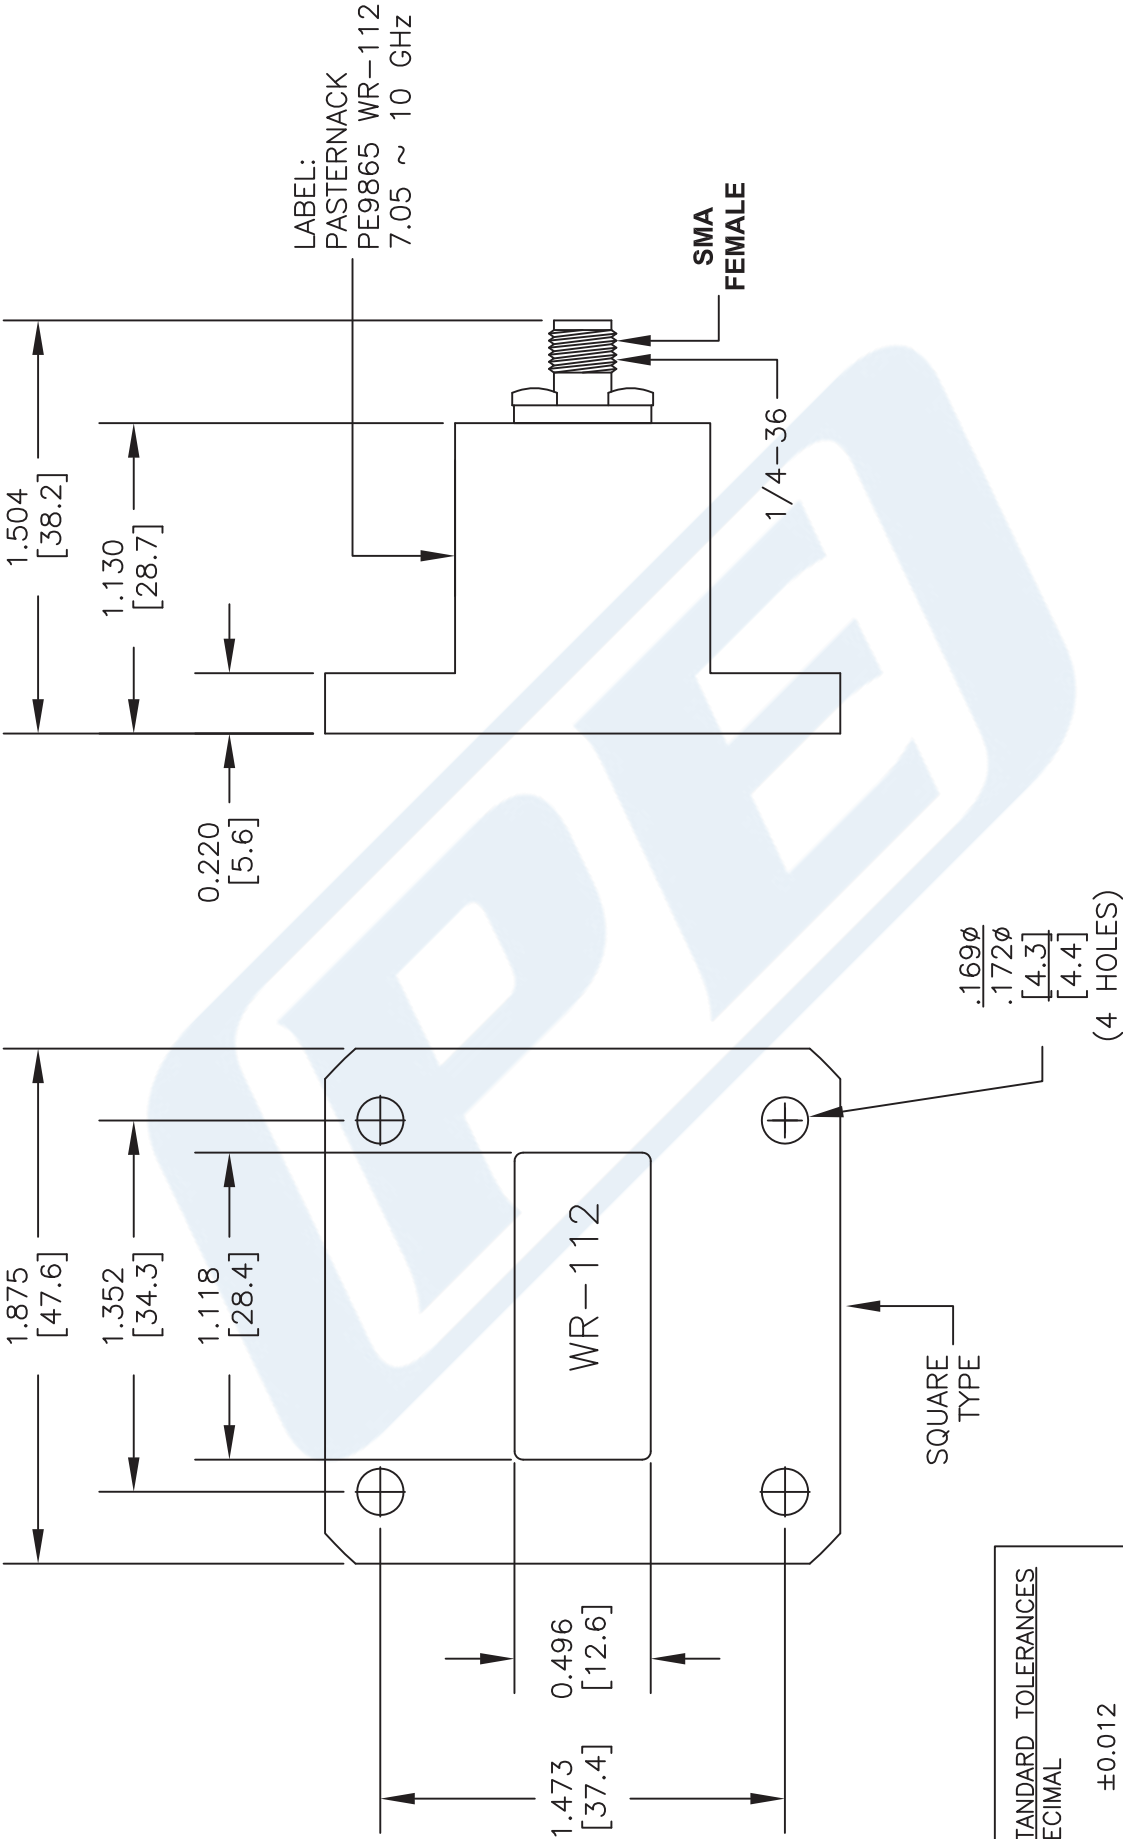

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE9865

CAGE CODE 53919

2233

SIZE A

SCALE N/A

CAD FILE 060717

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com