



Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz
External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package

Phase Locked Oscillators Technical Data Sheet

PE19XP5007

Features

- 4,000 MHz Phase-Locked Oscillator
- External 10 MHz Reference Oscillator
- -98 dBc/Hz @ 10kHz offset
- Pout +7 dBm
- Harmonics -20 dBc
- Designed to meet MIL-STD-202 Environmental Conditions

Applications

- Phase Locked Loop
- Function Generators
- Frequency Synthesizers
- Receivers
- Electronic Jamming Equipment
- Local Oscillator
- Wireless Communications
- SATCOM
- Optical Communications
- Military Electronic Systems

Description

The PE19XP5007 is a 4,000 MHz Phase-Locked Oscillator with an external 10 MHz Reference Oscillator. This design features exceptional phase noise performance of -98 dBc/Hz @ 10 kHz offset. Supply Voltage is +5V DC @ 125 mA typ. The package is 0.9 inch SMT package with an industry standard mounting footprint. The bottom surface is copper clad with 2-5 micro inches of immersion gold over 150 - 250 micro inches of electroless nickel which makes it resistant to oxidation for ease of soldering. The reference oscillator has an output power level of +7 dBm +/- 3 dB and 2nd harmonic output of -20 dBc typical. The Reference Oscillator operates over a temperature range of -30°C to +70°C and is designed to meet MIL-STD-202 test conditions for Vibration and Shock.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Output Frequency		4		GHz
Output Power	+4	+7	+10	dBm
Phase Noise @ 1kHz Offset		-88	-83	dBc/Hz
Phase Noise @ 10kHz Offset		-98	-93	dBc/Hz
Phase Noise @ 100kHz Offset		-118	-113	dBc/Hz
Phase Noise @ 1MHz Offset		-138	-133	dBc/Hz
Reference Frequency		10		MHz
Reference Impedance		50		Ohms
Reference Phase Noise @ 10Hz Offset		-110		dBc/Hz
Reference Phase Noise @ 100Hz Offset		-130		dBc/Hz
Reference Phase Noise @ 1kHz Offset		-145		dBc/Hz
2nd Harmonics		-25	-20	dBc
Spurious		-70	-65	dBc
Supply Voltage (DC) 1		5		Vdc
Supply Current (DC) 1		25		mA

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Surface Mount \(SMT\) 4 GHz Phase Locked Oscillator, 10 MHz External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package PE19XP5007](#)



Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz
External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package

Phase Locked Oscillators Technical Data Sheet

PE19XP5007

Mechanical Specifications

Size

Length	0.9 in [22.86 mm]
Width	0.9 in [22.86 mm]
Height	0.21 in [5.33 mm]
Weight	0.28 lbs [127.01 g]

Mounting Surface Material and Plating	Copper Clad Nickel, Gold
Design	Commercial
Reference Type	External
Package Style	Surface Mount

Environmental Specifications

Temperature

Operating Range	-30 to +70 deg C
Shock	IAW MIL-STD-202, Method 213, Condition A
Vibration	IAW MIL-STD-202, Method 204, Condition A
ESD Sensitivity	ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.



Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Surface Mount \(SMT\) 4 GHz Phase Locked Oscillator, 10 MHz External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package PE19XP5007](#)





Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz
External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package


Phase Locked Oscillators Technical Data Sheet

PE19XP5007

Functional Block Diagram

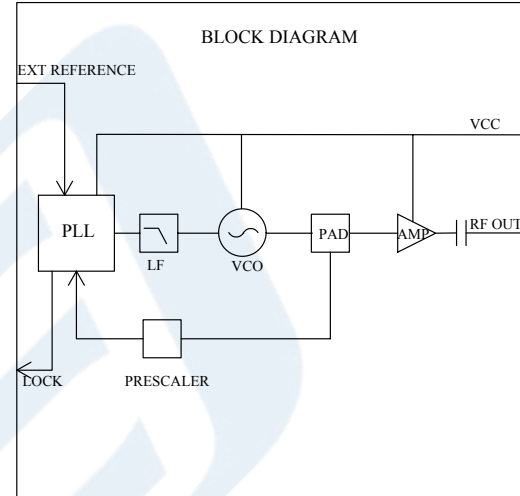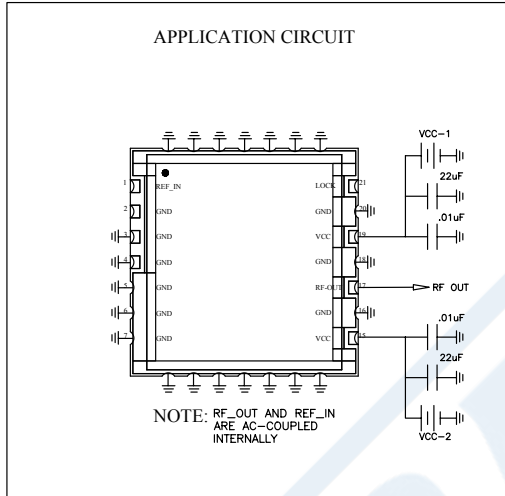

Typical Performance Data

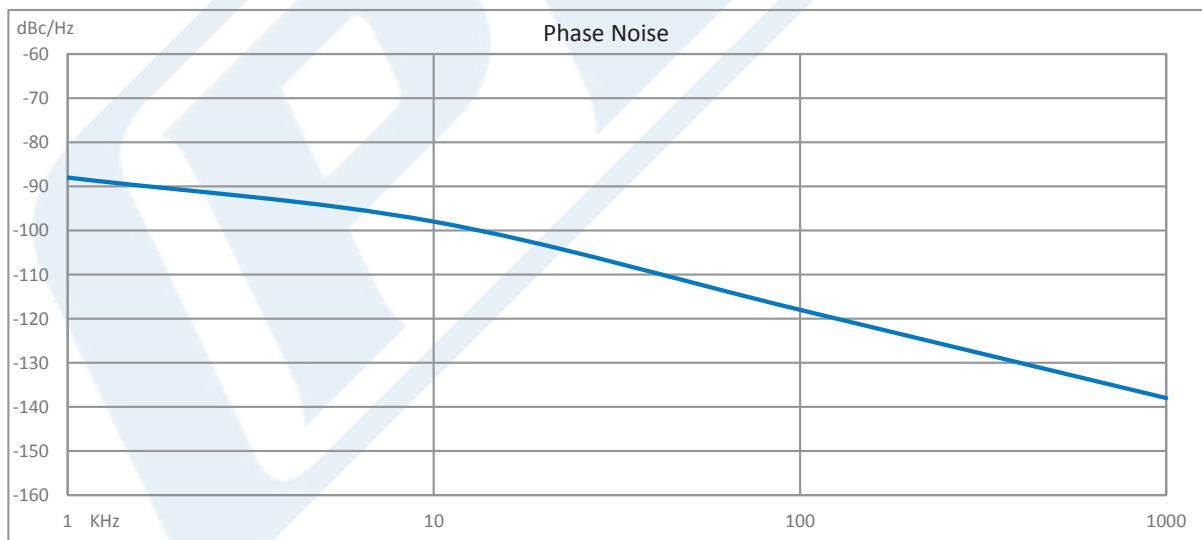

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Surface Mount \(SMT\) 4 GHz Phase Locked Oscillator, 10 MHz External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package PE19XP5007](#)



Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz
External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package

Phase Locked Oscillators Technical Data Sheet

PE19XP5007

Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Surface Mount \(SMT\) 4 GHz Phase Locked Oscillator, 10 MHz External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package PE19XP5007](https://www.pasternack.com/surface-mount-smt-4-ghz-phase-locked-oscillator-external-pe19xp5007-p.aspx)


URL: <https://www.pasternack.com/surface-mount-smt-4-ghz-phase-locked-oscillator-external-pe19xp5007-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE19XP5007 CAD Drawing

Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz

External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package

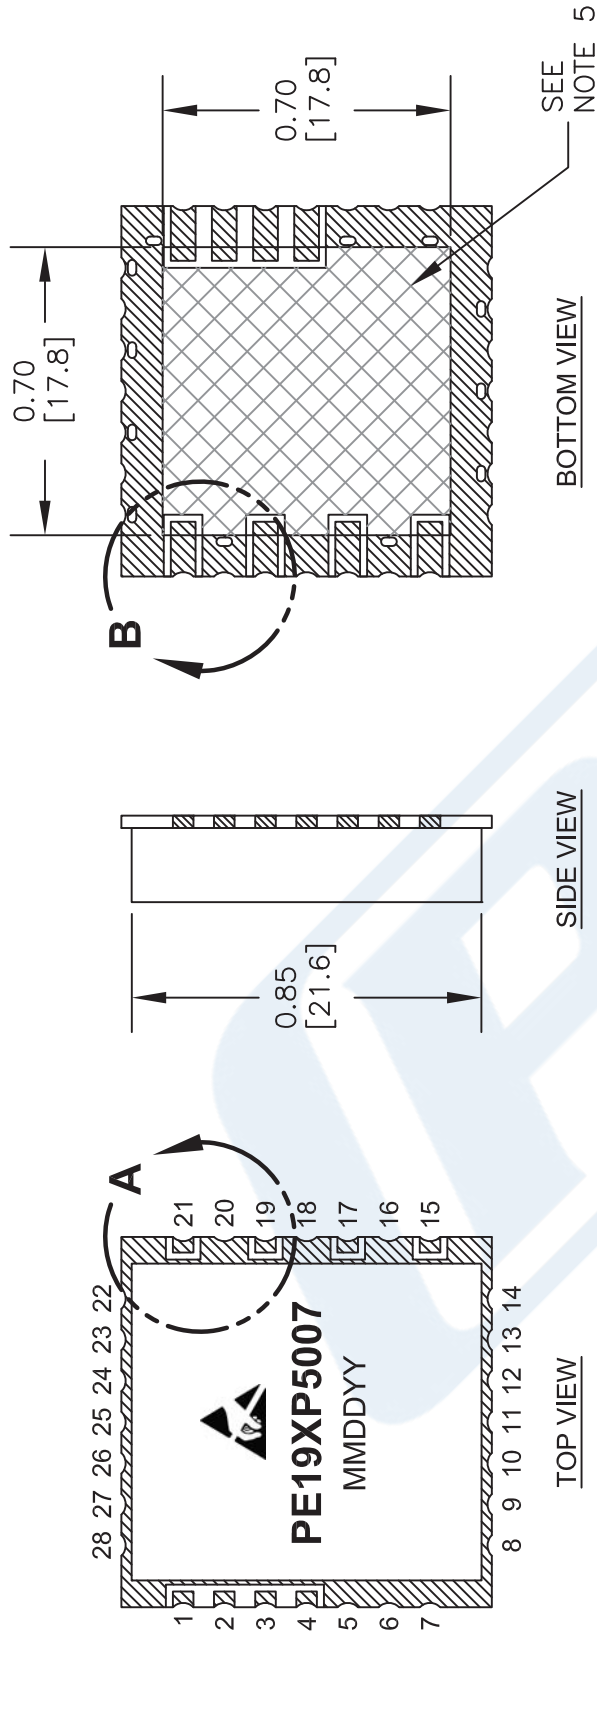

Pin Configuration							
1	RF IN	8	GND	15	Vcc-2	22	GND
2	GND	9	GND	16	GND	23	GND
3	GND	10	GND	17	RF OUT	24	GND
4	GND	11	GND	18	GND	25	GND
5	GND	12	GND	19	Vcc-1	26	GND
6	GND	13	GND	20	GND	27	GND
7	GND	14	GND	21	LOCK	28	GND

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: inches [mm]
TOLERANCES ARE:
.XX = ± .03 [.762]
.XXX = ± .005 [.127]

- NOTES:
1. SINGLE HATCHED AREA REPRESENTS EXPOSED METALIZATION.
 2. DOUBLE HATCHED AREA REPRESENTS MASK OVER METALIZATION.
 3. RECOMMENDED PAD LAYOUT IAW IPC-7351.
 4. TOP AND BOTTOM GROUND PADS MAY BE USED IN HIGH VIBRATION APPLICATIONS, MAY BE OMITTED FOR NORMAL OPERATION.
 5. DOUBLE HATCHED AREA REPRESENTS MASKED (TENTED) VIAS AND TRACES, REMOVE ALL METALIZATION FROM THIS AREA ON MATING PART.

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE19XP5007

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 120116

SCALE N/A


SIZE A

2233


PE19XP5007 CAD Drawing

Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz


External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package

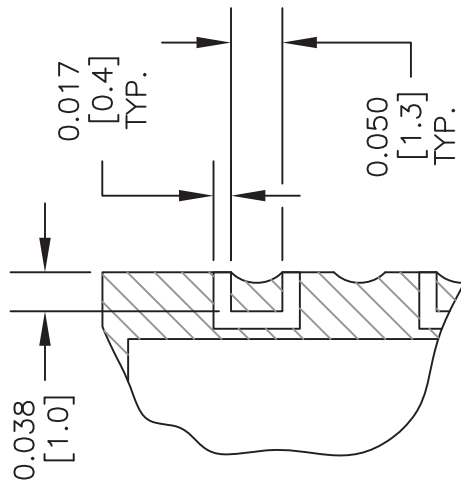

View A
PAD DETAIL

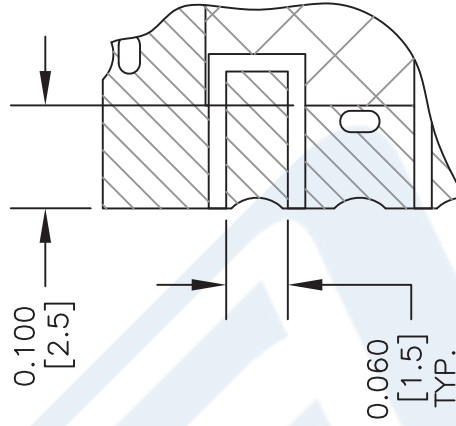

View B
PAD DETAIL

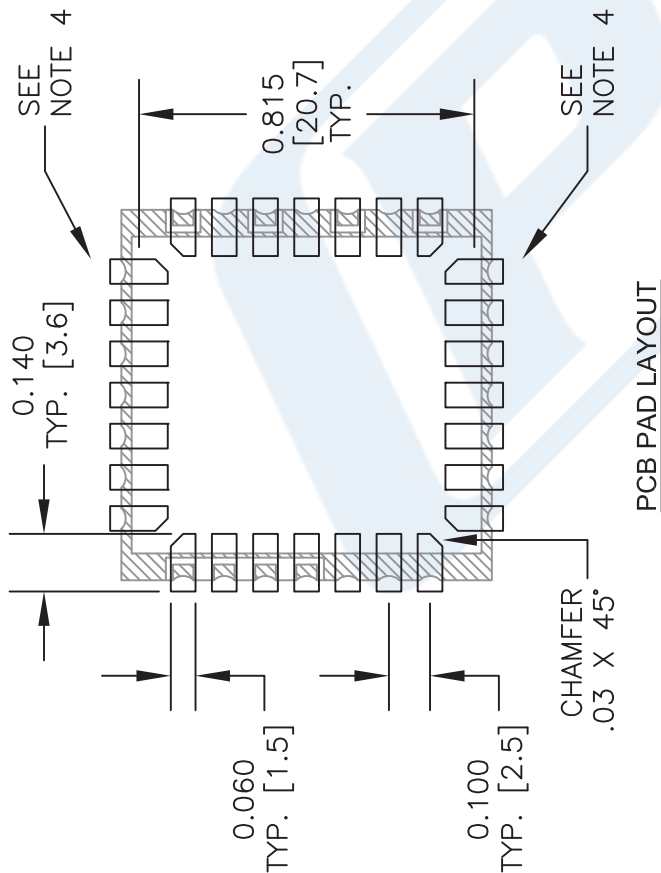

PCB PAD LAYOUT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: inches [mm]
TOLERANCES ARE:
.XX = ± .03 [.762]
.XXX = ± .005 [.127]

NOTES:

1. SINGLE HATCHED AREA REPRESENTS EXPOSED METALIZATION.
2. DOUBLE HATCHED AREA REPRESENTS MASK OVER METALIZATION.
3. RECOMMENDED PAD LAYOUT IAW IPC-7351.
4. TOP AND BOTTOM GROUND PADS MAY BE USED IN HIGH VIBRATION APPLICATIONS, MAY BE OMITTED FOR NORMAL OPERATION.
5. DOUBLE HATCHED AREA REPRESENTS MASKED (TENTED) VIAS AND TRACES, REMOVE ALL METALIZATION FROM THIS AREA ON MATING PART.

* THESE DIMENSIONS AND TOLERANCES
SUPERSEDE NOTE #1 ON TITLE BLOCK.



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE19XP5007

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 120116

SCALE N/A


SIZE A

2233


PE19XP5007 CAD Drawing

Surface Mount (SMT) 4 GHz Phase Locked Oscillator, 10 MHz
External Ref., Phase Noise -98 dBc/Hz, 0.9 inch Package

TYPICAL ATTACHMENT REFLOW PROFILES

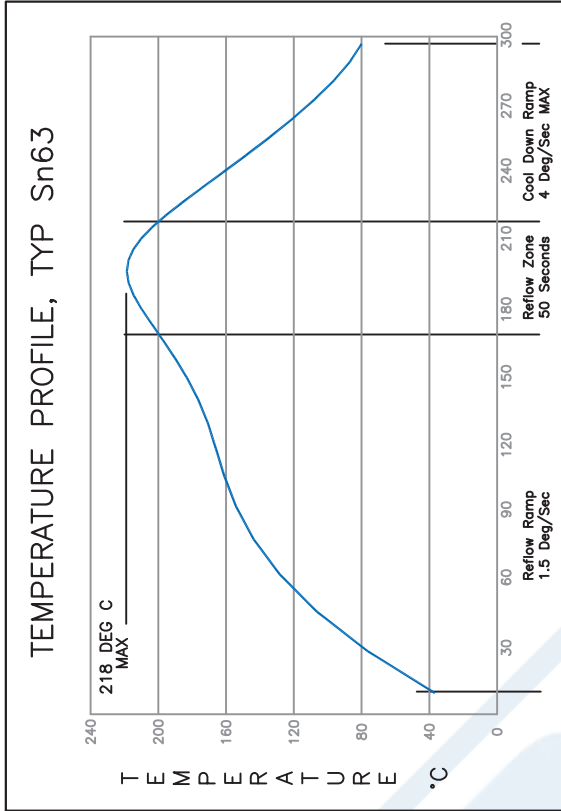

NON-RoHS

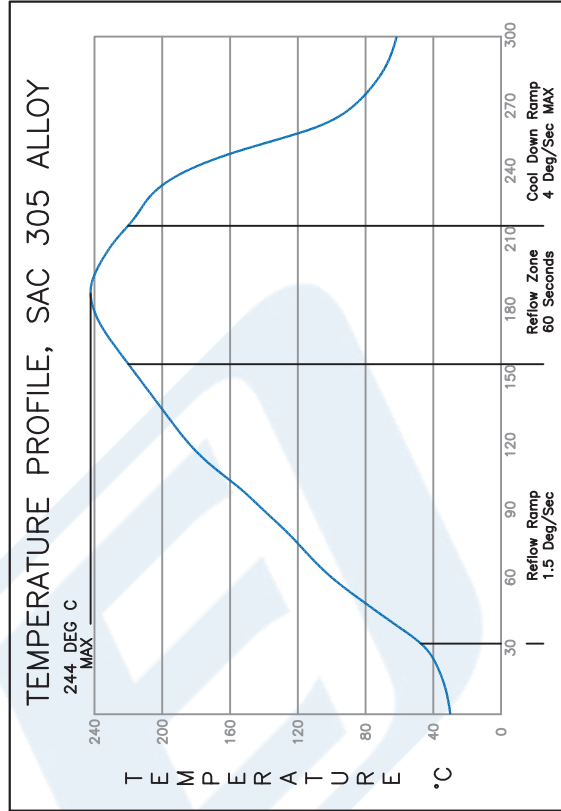

RoHS

DWG TITLE

PE19XP5007

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 120116


SCALE N/A

SIZE A

2233

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

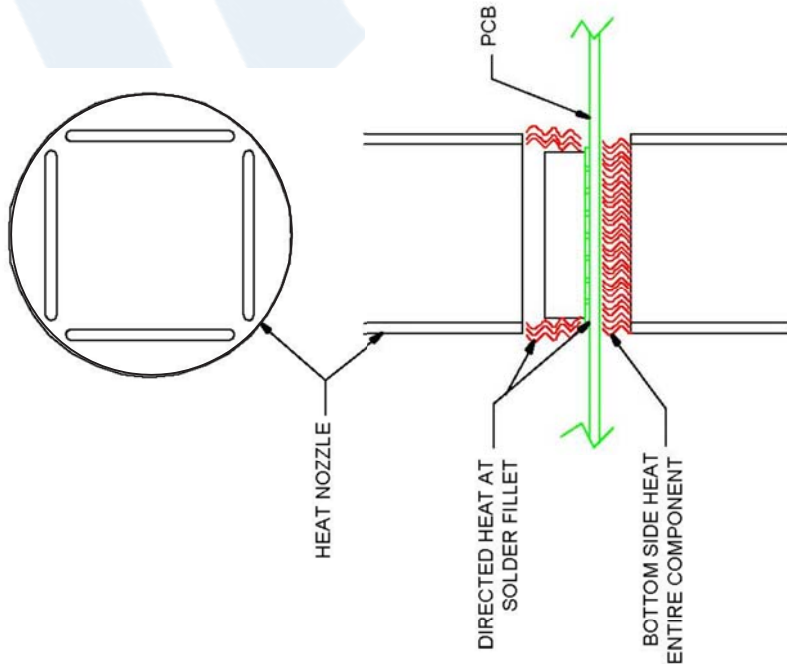

REMOVAL INSTRUCTIONS

1. ESD PRECAUTIONS MUST BE OBSERVED DURING REMOVAL.
2. APPLY A LIBERAL AMOUNT OF FLUX TO ALL SOLDER CONNECTIONS.
3. REMOVE EXCESS SOLDER WITH A SOLDERING IRON AND WICK.
4. APPLY HEAT AND LIFT THE COMPONENT STARTING AT ONE CORNER WITH A SMALL SPATUL OR SIMILAR TOOL. CARE MUST BE TAKEN NOT TO BUMP THE LID WHICH MAY CAUSE INTERNAL SHORTS.
5. REMOVE ANY REMAINING SOLDER ON THE PADS PRIOR TO RE-ATTACHMENT.