



## Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA

### Voltage Control Oscillators Technical Data Sheet

PE1V31006

#### Features

- 60 to 120 MHz Bandwidth
- -114 dBc/Hz typ @ 10kHz offset
- Tuning Voltage 0.5V to 18.5V
- Pout = +11 dBm typ
- Harmonics = -10 dBc typ
- RoHS Compliant Assembly
- Compact Size Rugged Metal Coaxial package
- Field Replaceable SMA Female Connector
- Designed to meet MIL-STD-202 Environmental Conditions

#### Applications

- Phase Locked Loop
- Function Generators
- Frequency Synthesizers
- Receivers
- Electronic Jamming Equipment
- Local Oscillator
- Wireless Communications
- SATCOM
- Optical Communications
- Military Electronic Systems

#### Description

The PE1V31006 is a High Reliability Low Noise Voltage Controlled Oscillator (VCO) which covers a 60 MHz to 120 MHz frequency band with a voltage tuning range from 0.5V to 18.5V. This design features exceptional phase noise performance of -114 dBc/Hz typ @ 10 kHz offset. Supply Voltage is +15V with a generated output power level of +11 dBm typ and 2nd harmonic output of -10 dBc typical. The assembly is RoHS compliant and available in a compact sized rugged metal housing which supports a field replaceable SMA female connector, RFI Voltage and ground pins. The VCO operates over a temperature range of -40°C to +85°C and is designed to meet a variety of MIL-STD-202 test conditions including Humidity, Shock, and Vibration.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	60		120	MHz
Tuning Voltage	0.5		18.5	Vdc
Supply Voltage (DC)	14	15	16	Vdc
Supply Current (DC)		18	20	mA
Phase Noise @ 1kHz Offset		-87	-84	dBc/Hz
Phase Noise @ 10kHz Offset		-114	-112	dBc/Hz
Phase Noise @ 100kHz Offset		-134	-132	dBc/Hz
Output Power	+10	+11	+12	dBm
Tuning Sensitivity (Kvco)	2		6	MHz/V
Pushing		0.2	0.4	MHz/V
Pulling (pk-pk)		100	200	KHz
Tuning Port Capacitance		82		pF
Load Impedance		50		Ohms
2nd Harmonics		-10		dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator \(VCO\) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA PE1V31006](#)



Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA

## Voltage Control Oscillators Technical Data Sheet

PE1V31006

Electrical Specification Notes:  
Pulling @ 1.5:1 VSWR

### Mechanical Specifications

#### Size

Length	0.95 in [24.13 mm]
Width	0.95 in [24.13 mm]
Height	0.285 in [7.24 mm]
Weight	0.028 lbs [12.7 g]
Body Material and Plating	Aluminum
Design	Commercial
Connector Option	Standard
Output Connector	SMA Female

### Environmental Specifications

#### Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C

Humidity	MIL-STD-202, Method 103, 90% RH, +65 C
Shock	MIL-STD-202, Method 213I
Vibration	MIL-STD-202, Method 204D
Temperature Cycle	MIL-STD-202, Method 107B
ESD Sensitivity	ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator \(VCO\) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA PE1V31006](#)



Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA

## Voltage Control Oscillators Technical Data Sheet

PE1V31006

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

**Typical Performance Data**



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator \(VCO\) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA PE1V31006](#)



Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA

Voltage Control Oscillators Technical Data Sheet

PE1V31006

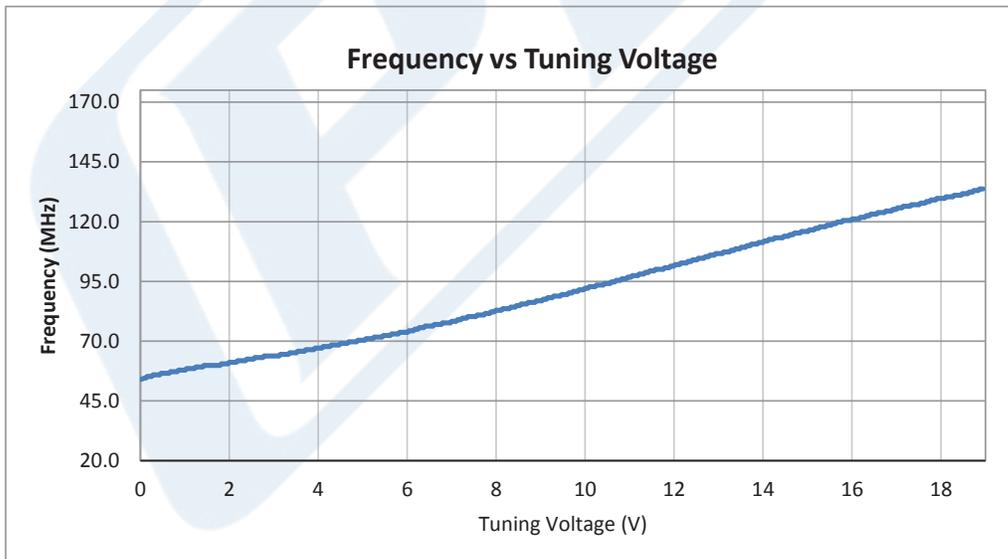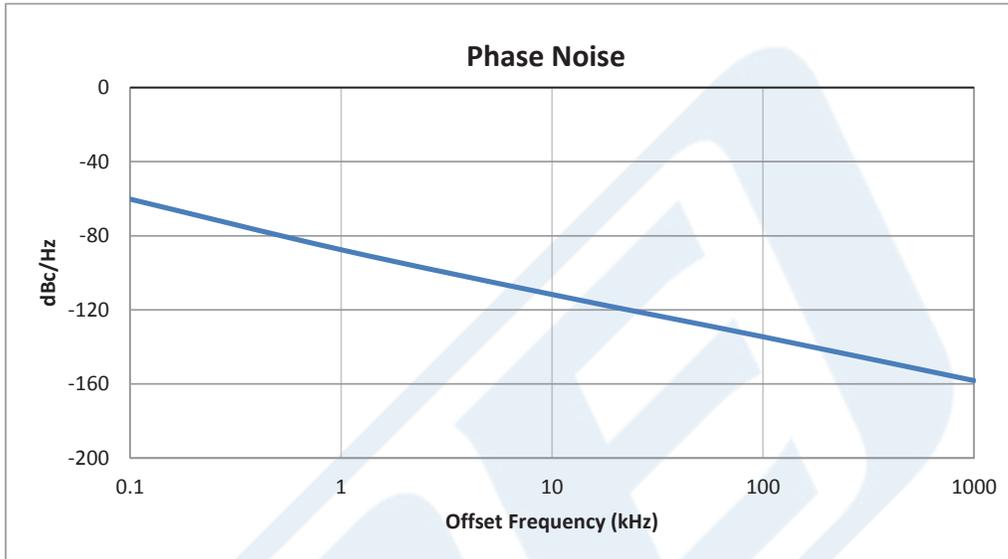



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator \(VCO\) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA PE1V31006](#)



Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA

Voltage Control Oscillators Technical Data Sheet

PE1V31006

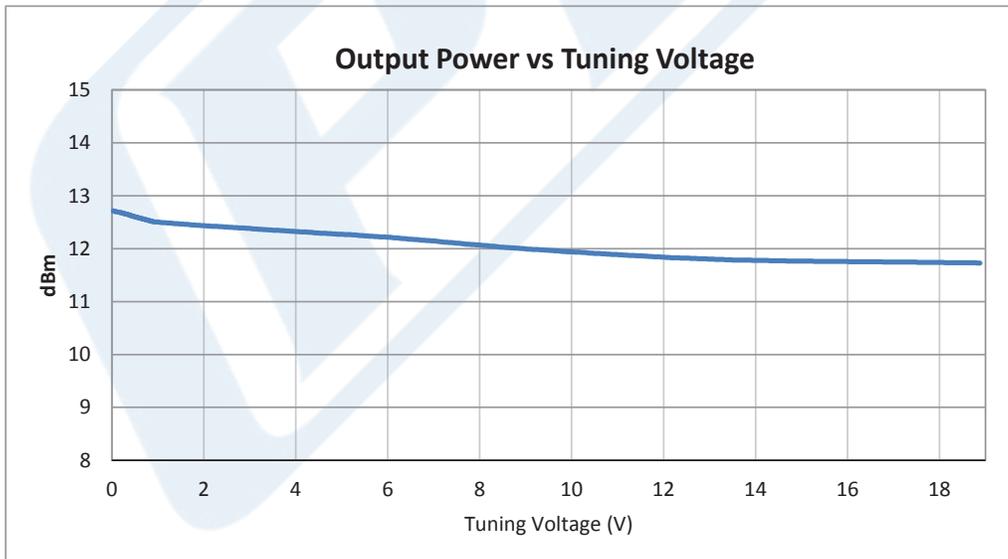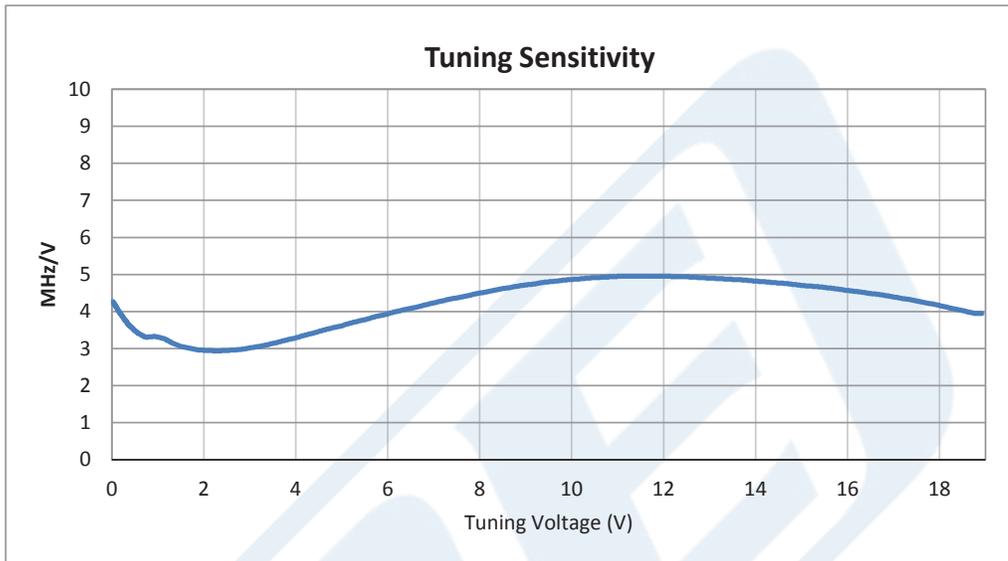


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator \(VCO\) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA PE1V31006](#)



Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA

## Voltage Control Oscillators Technical Data Sheet

PE1V31006

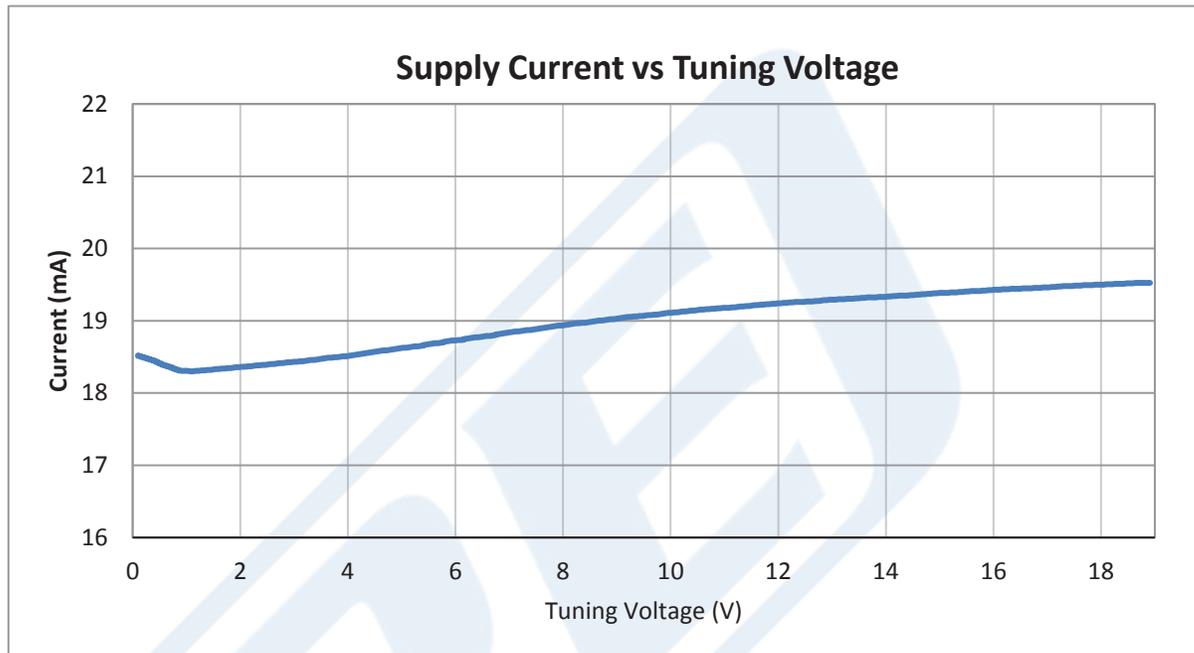

Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator \(VCO\) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA PE1V31006](https://www.pasternack.com/voltage-controlled-oscillator-vco-120-mhz-pe1v31006-p.aspx)

URL: <https://www.pasternack.com/voltage-controlled-oscillator-vco-120-mhz-pe1v31006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE1V31006 CAD Drawing

Voltage Controlled Oscillator (VCO) From 60 MHz to 120 MHz, Phase Noise of -114 dBc/Hz and SMA

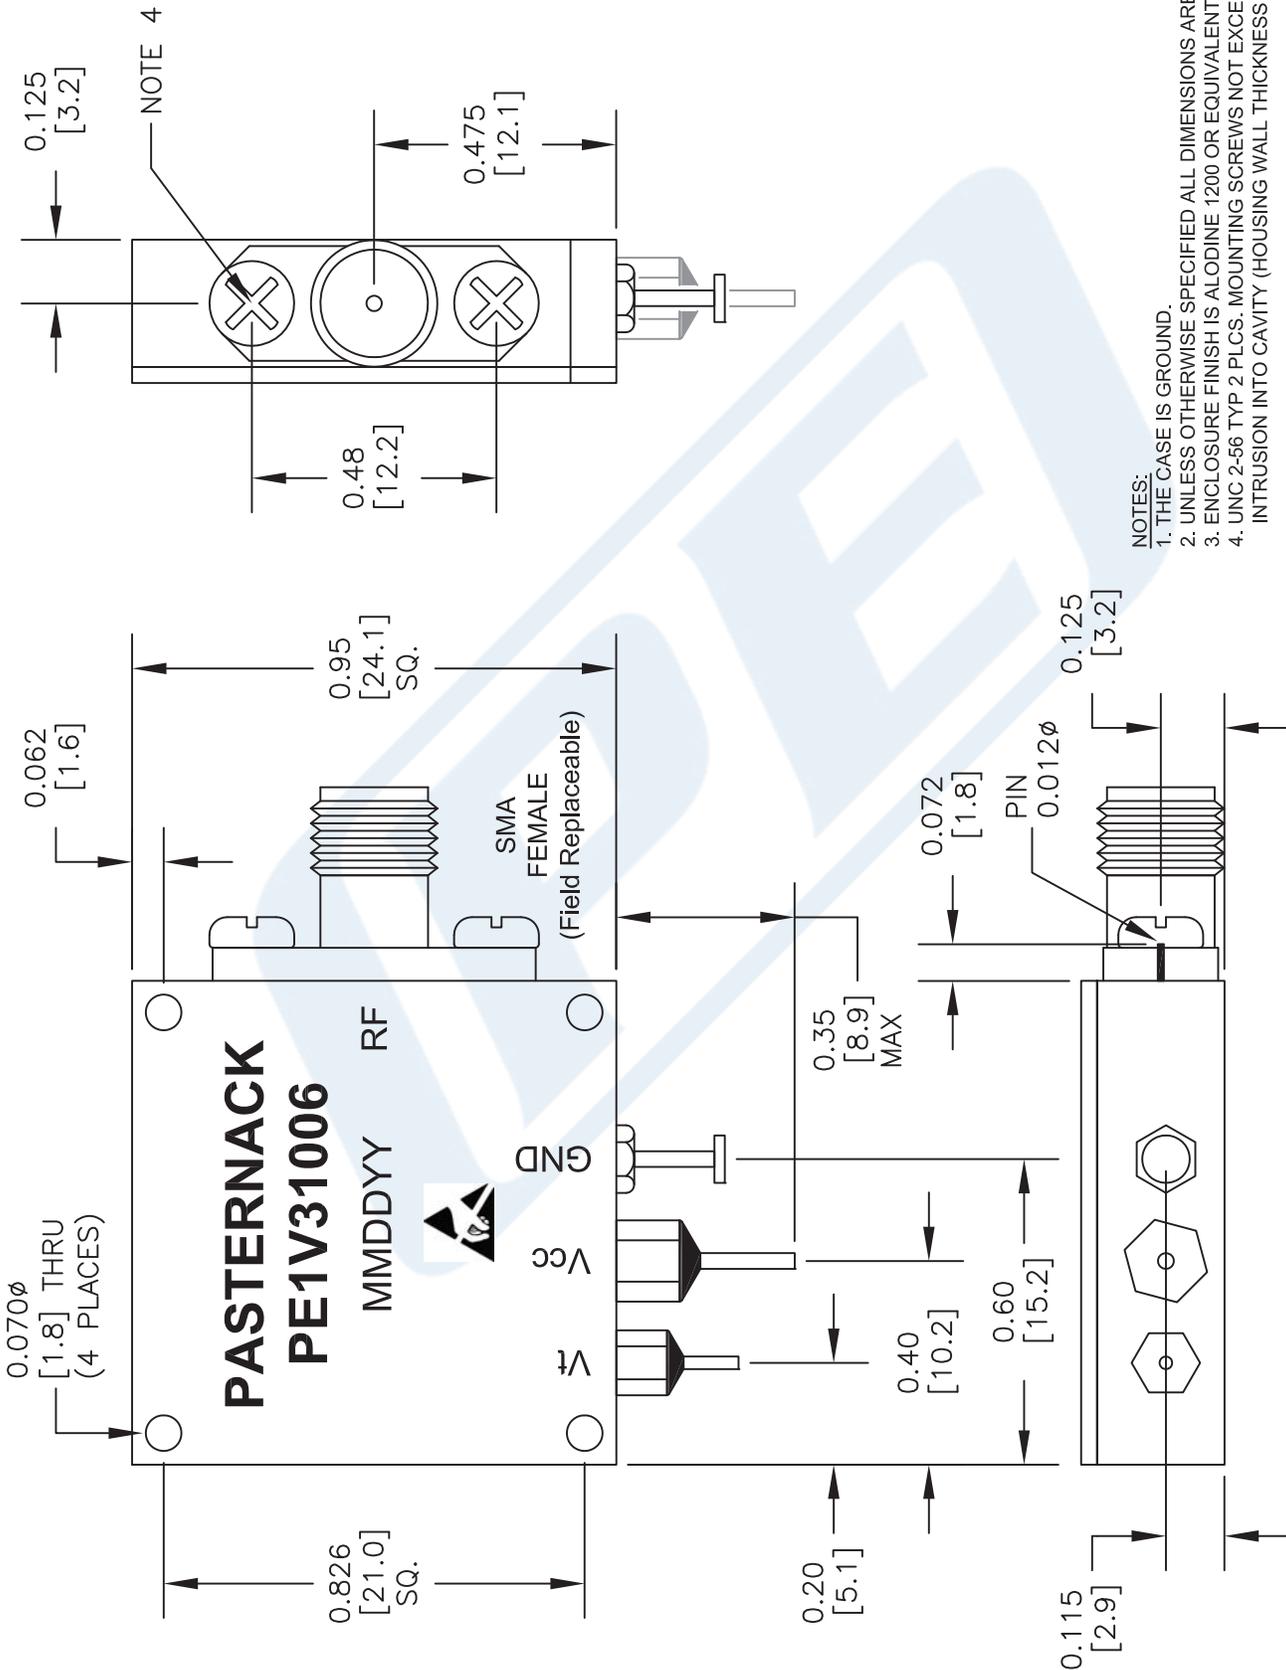

- NOTES:
1. THE CASE IS GROUND.
  2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [mm].
  3. ENCLOSURE FINISH IS ALODINE 1200 OR EQUIVALENT.
  4. UNC 2-56 TYP 2 PLCS. MOUNTING SCREWS NOT EXCEED 0.062" INTRUSION INTO CAVITY (HOUSING WALL THICKNESS 0.125").

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE1V31006**

FSCM NO. 53919

SCALE N/A

SIZE A

CAD FILE 040716

2233

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com