



## BNC Twinax Jack Bulkhead Mount Connector Clamp/Solder Attachment for RG108, 78 Ohm Twinax, .480 inch D Hole

### RF Connectors Technical Data Sheet

PE44114

#### Configuration

- BNC Twinax Jack Connector
- MIL-STD-348
- 78 Ohms
- Straight Body Geometry
- RG108, 78 Ohm Twinax Interface Type
- Clamp/Solder Attachment
- Bulkhead

#### Features

- Silver Plated Contact
- Contact plating according to QQ-S-365

#### Applications

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies

#### Description

Pasternack's PE44114 78 ohm BNC Twinax jack bulkhead connector with clamp/solder attachment for RG108 and 78 Ohm Twinax (.480 inch D hole) is part of our full line of RF components available for same-day shipping. This BNC Twinax bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our 78 ohm BNC Twinax jack bulkhead connector PE44114 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Mechanical Specifications

##### Size

Length	1.25 in [31.75 mm]
Width/Dia.	0.688 in [17.48 mm]
Weight	0.047 lbs [21.32 g]

##### Material Specifications

Description	Material	Plating
Contact		Silver QQ-S-365
Insulation	PTFE	
Body	Brass	Nickel QQ-N-290

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack Bulkhead Mount Connector Clamp/Solder Attachment for RG108, 78 Ohm Twinax, .480 inch D Hole PE44114](#)



BNC Twinax Jack Bulkhead Mount Connector Clamp/Solder Attachment for RG108, 78 Ohm Twinax, .480 inch D Hole

RF Connectors Technical Data Sheet

PE44114

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

BNC Twinax Jack Bulkhead Mount Connector Clamp/Solder Attachment for RG108, 78 Ohm Twinax, .480 inch D Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack Bulkhead Mount Connector Clamp/Solder Attachment for RG108, 78 Ohm Twinax, .480 inch D Hole PE44114](#)

URL: <https://www.pasternack.com/bnc-twinax-jack-standard-rg108-78-ohm-twinax-connector-pe44114-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE44114 CAD Drawing


BNC Twinax Jack Bulkhead Mount Connector Clamp/Solder Attachment for RG108, 78 Ohm Twinax, .480 inch D Hole

## ASSEMBLY PROCEDURES

1. SLIDE CLAMP NUT (1), WASHER (2) & GASKET (3) OVER CABLE. STRIP CABLE TO DIMENSION SHOWN. DO NOT NICK BRAID & DIELECTRIC. COMB OUT BRAID. TAPER END OF BRAID TO PERMIT ASSEMBLY OF BRAID CLAMP (4). SLIDE BRAID CLAMP (4) OVER BRAID & BUTT AGAINST JACKET. FORM BRAID OVER CLAMP NUT (4). TRIM BRAID FLUSH WITH SHOULDER OF BRAID CLAMP (4).


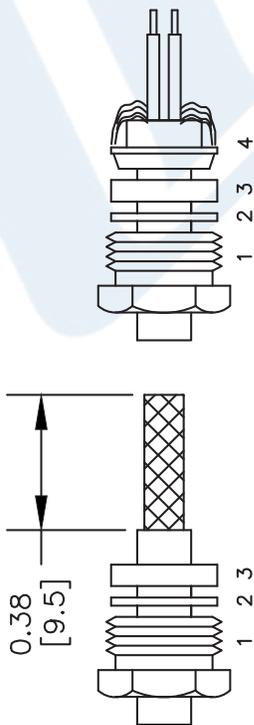


2. STRIP CABLE TO DIMENSION SHOWN. SLIDE SMALL WASHER (5) & REAR INSULATOR (6) OVER DIELECTRICS. SOLDER CONTACTS (7) TO CENTER CONDUCTOR THROUGH HOLE IN CONTACT. CLEAN EXCESS SOLDER. SLIDE FRONT INSULATOR (8) OVER CONTACTS. SLIDE ASSEMBLY FORWARD INTO BODY & TIGHTEN.

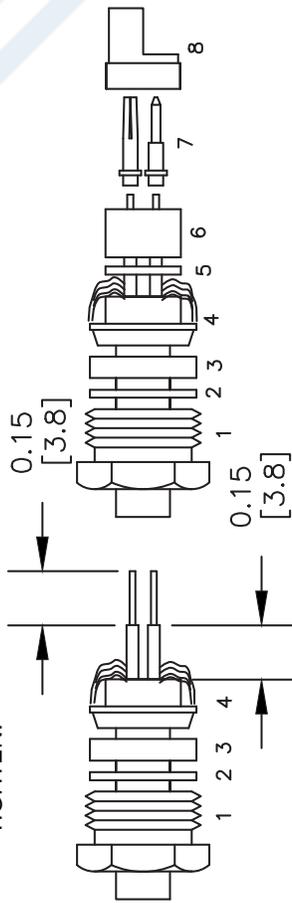

### NOTE:

WHEN SOLDERING CONTACTS MAKE SURE SAME SEX IS ON BOTH ENDS OF WIRE IDENTIFIED BY THE BARE COPPER WIRE.

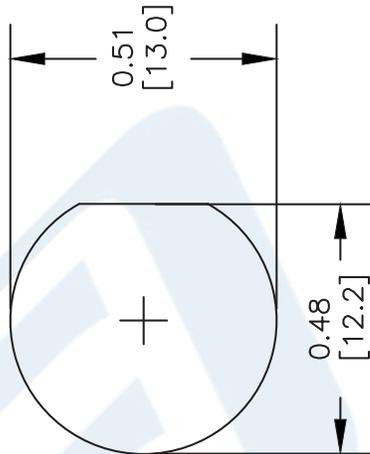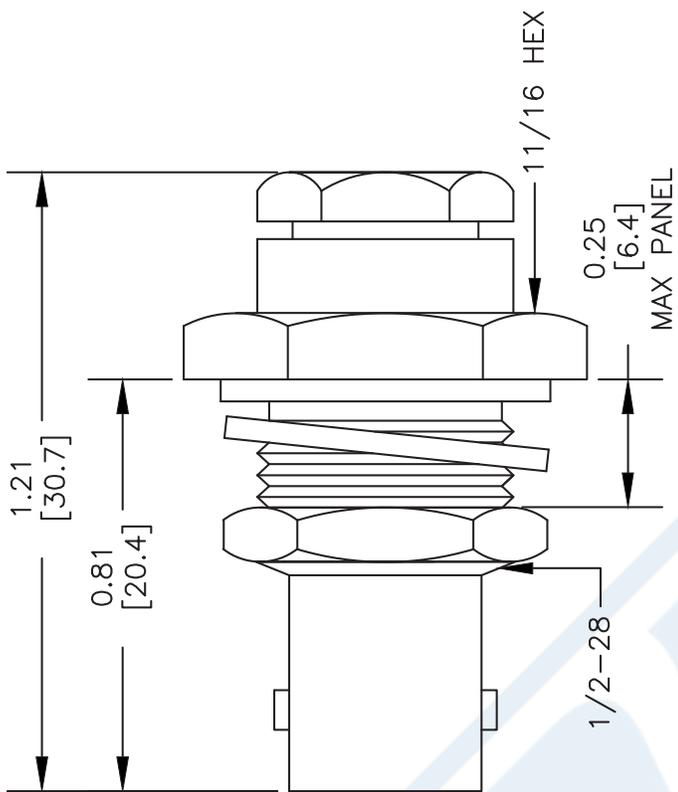

MOUNTING HOLE

DWG TITLE

**PE44114**

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 042210-A

SCALE N/A

SIZE A

2233



Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com



BNC Twinax Plug Connector Crimp/Solder Attachment for RG108, 78 Ohm Twinax

RF Connectors Technical Data Sheet

PE4234

**Configuration**

- BNC Twinax Plug Connector
- MIL-STD-348A
- 78 Ohms
- Straight Body Geometry
- RG108, 78 Ohm Twinax Interface Type
- Crimp/Solder Attachment

**Features**

- Max. Operating Frequency 500 MHz
- Gold Plated Brass/Beryllium Copper Contact
- 30 µm minimum contact plating

**Applications**

- General Purpose Test
- Custom Cable Assemblies

**Description**

Pasternack's PE4234 78 ohm BNC Twinax plug connector with crimp/solder attachment for RG108 and 78 Ohm Twinax is part of our full line of RF components available for same-day shipping. Our BNC Twinax plug connector operates up to a maximum frequency of 500 MHz.

Our 78 ohm BNC Twinax plug connector PE4234 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		500	MHz
Operating Voltage (AC)			500	Vrms

**Mechanical Specifications**

<b>Size</b>	
Length	1.522 in [38.66 mm]
Width/Dia.	0.571 in [14.50 mm]
Weight	0.045 lbs [20.41 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Plug Connector Crimp/Solder Attachment for RG108, 78 Ohm Twinax PE4234](#)



## BNC Twinax Plug Connector Crimp/Solder Attachment for RG108, 78 Ohm Twinax

### RF Connectors Technical Data Sheet

PE4234

#### Material Specifications

Description	Material	Plating
Contact	Brass/Beryllium Copper	Gold 30 µin minimum
Insulation	PTFE	
Body	Brass	Nickel 100 µin minimum
Coupling Nut	Brass	Nickel 100 µin minimum
Gasket	Silicone	
Crimp Sleeve	Brass	Nickel
Washer	Brass	Nickel

#### Environmental Specifications

##### Temperature

Operating Range -65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Assembly Instruction

BNC Twinax Plug Connector Crimp/Solder Attachment for RG108, 78 Ohm Twinax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Plug Connector Crimp/Solder Attachment for RG108, 78 Ohm Twinax PE4234](#)

URL: <https://www.pasternack.com/bnc-twinax-plug-standard-rg108-78-ohm-twinax-connector-pe4234-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE4234 CAD Drawing

BNC Twinax Plug Connector Crimp/Solder Attachment for RG108, 78 Ohm Twinax

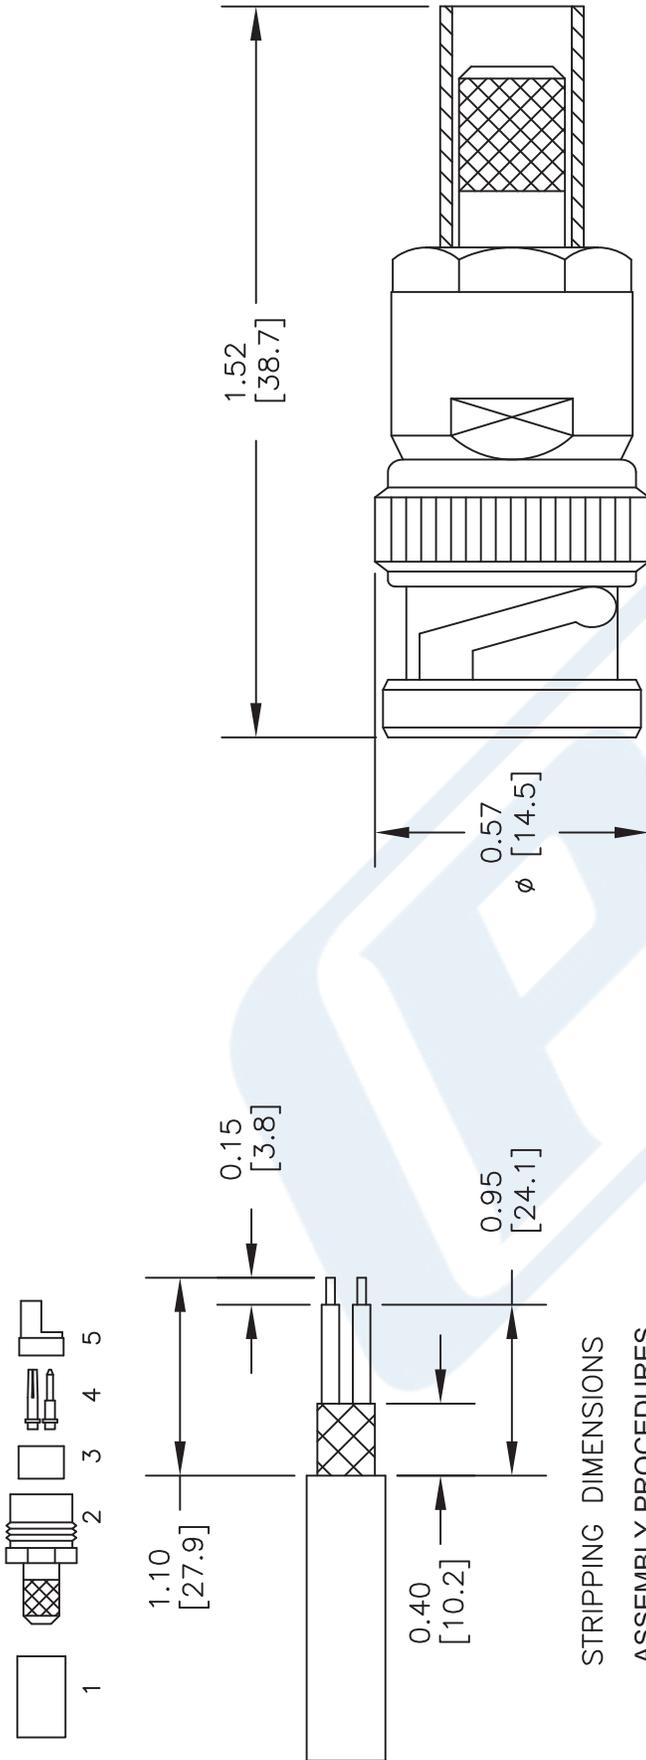

## STRIPPING DIMENSIONS

## ASSEMBLY PROCEDURES

1. SLIDE FERRULE (1) ONTO CABLE. STRIP CABLE TO DIMENSIONS SHOWN. SLIDE EXTENSION (2) BETWEEN BRAID & DIELECTRIC. SLIDE FERRULE OVER BRAID. SLIDE REAR INSULATOR (3) OVER CENTER CONDUCTORS & DIELECTRICS RESTING AGAINST EXTENSION (2).
2. SOLDER CONTACTS (4) TO CENTER CONDUCTOR THROUGH HOLE IN CONTACT. CONTACTS TO COMPLETELY REST ON DIELECTRIC (3) FOR PROPER HEIGHT. SLIDE FRONT INSULATOR (5) OVER CONTACTS.
3. SLIDE ASSEMBLY FORWARD INTO BODY & TIGHTEN. CRIMP FERRULE.

## CRIMP SIZE REQUIRED

FERRULE: .255" HEX CRIMP TOOL

\* WHEN SOLDERING CONTACTS MAKE SURE SAME SEX IS ON BOTH ENDS OF WIRE IDENTIFIED BY THE BARE COPPER WIRE.



**THE ENGINEER'S RF SOURCE**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE

**PE4234**

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 092115

SCALE N/A

SIZE A

2233



# 78 Ohm Flexible RG108 Twinax Cable Single Shielded with Black PVC Jacket

## RF Cables Technical Data Sheet

### Times Microwave Systems Coax Cable Specification

#### Configuration

- Flexible Cable
- 1 Shield(s)

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Impedance		78		Ohms
Velocity of Propagation		66		%
Nominal Capacitance		19.7 [64.63]		pF/ft [pF/m]

#### Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	10	100	200	400	700	MHz
Attenuation, Typ	2.8	9	13.6	19.4	26.4	dB/100ft dB/100m
	9.19	29.53	44.62	63.65	86.61	

Description	F6	F7	F8	F9	F10	Units
Frequency	900	1,000				MHz
Attenuation, Typ	30.4	34.6				dB/100ft dB/100m
	99.74	113.52				

#### Mechanical Specifications

Diameter	0.235 in [5.97 mm]
Weight	0.038 lbs/ft [0.06 Kg/m]

#### Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper, Tin7	0.038 in 0.97 mm

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [78 Ohm Flexible RG108 Twinax Cable Single Shielded with Black PVC Jacket RG108A/U](#)



## 78 Ohm Flexible RG108 Twinax Cable Single Shielded with Black PVC Jacket

### RF Cables Technical Data Sheet



RG108A/U

Conductor Type	Stranded	
Dielectric	PE	0.079 in 2.01 mm
First Shield	Tinned Copper Braid	0.185 in 4.7 mm
Jacket	PVC, Black	0.235 in [5.97 mm]

#### Environmental Specifications

##### Temperature

Operating Range -40 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data


Notes:

78 Ohm Flexible RG108 Twinax Cable Single Shielded with Black PVC Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [78 Ohm Flexible RG108 Twinax Cable Single Shielded with Black PVC Jacket RG108A/U](#)

URL: <https://www.pasternack.com/78-ohm-flexible-rg108au-pvc-jacket-tinned-copper-braid-outer-conductor-single-shielded-black-rg108a-u-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

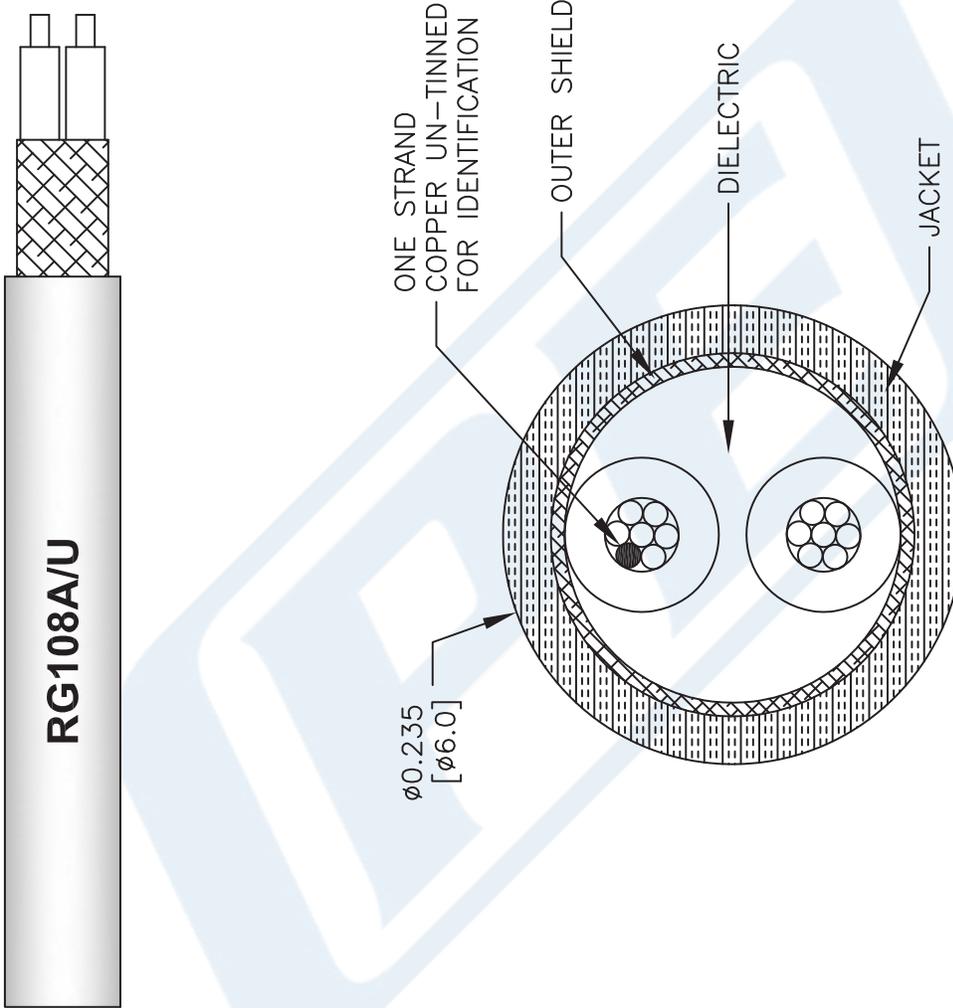

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES (mm).

DWG TITLE		CAD FILE		SCALE	SIZE	41742
<b>RG108A/U</b>		111716	N/A	A		
FSCM NO. 53919						

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com