



## 90 Degree SMA Hybrid Coupler From 7.5 GHz to 16 GHz Rated to 40 Watts

### Hybrids Technical Data Sheet

PE2056

#### Features

- 90° Hybrid Coupler
- High Power
- 7.5 to 16 GHz Frequency Range
- Isolation 15 dB
- Max Power 40 Watts (CW)

#### Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

#### Description

The PE2056 is a high power 90 degree hybrid coupler that operates from 7.5 to 16 GHz and can handle up to 40 Watts (CW) with 15 dB isolation and 1.45:1 VSWR maximum. The package interface uses SMA female connectors, and is REACH and RoHS compliant.

The PE2055 is part of Pasternack's family of 90 degree hybrid couplers in connectorized packages. These quadrature hybrids are excellent for any situation to either equally split an input signal into two paths with a 90 degree phase shift between them or to combine signals while maintaining high isolation between them.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.5		16	GHz
Impedance		50		Ohms
Phase Difference		90		Degrees
Coupling		3		dB
Insertion Loss			3.4	dB
Isolation		15		dB
VSWR			1.45:1	
Frequency Sensitivity		±0.6		dB
Input Power (CW)			40	Watts
Input Power (Peak)			2	KWatts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [90 Degree SMA Hybrid Coupler From 7.5 GHz to 16 GHz Rated to 40 Watts PE2056](#)



## 90 Degree SMA Hybrid Coupler From 7.5 GHz to 16 GHz Rated to 40 Watts

### Hybrids Technical Data Sheet

PE2056

#### Mechanical Specifications

##### Size

Length	1 in [25.4 mm]
Width	1.33 in [33.78 mm]
Height	0.38 in [9.65 mm]
Weight	0.041 lbs [18.6 g]

##### Configuration

RF Connector Type	SMA Female
-------------------	------------

#### Environmental Specifications

##### Temperature

Operating Range	-25 to +80 deg C
Storage Range	-55 to +150 deg C

Humidity	MIL-STD-202, Method 106 (90% relative humidity, +65°C)
----------	--

Shock	MIL-STD-202, Method 213/I (100 G's, 6 ms)
Vibration	MIL-STD-202, Method 204/D (10 to 2,000 Hz, 20 G's, 12 hours)

Altitude	MIL-STD-202, Method 105/E (150,000 feet)
----------	--

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

#### Plotted and Other Data

##### Notes:

90 Degree SMA Hybrid Coupler From 7.5 GHz to 16 GHz Rated to 40 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [90 Degree SMA Hybrid Coupler From 7.5 GHz to 16 GHz Rated to 40 Watts PE2056](http://www.pasternack.com/hybrid-directional-3-db-sma-coupler-7.5-16-ghz-40-watts-pe2056-p.aspx)

URL: <http://www.pasternack.com/hybrid-directional-3-db-sma-coupler-7.5-16-ghz-40-watts-pe2056-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE2056 CAD Drawing

90 Degree SMA Hybrid Coupler From 7.5 GHz to 16 GHz Rated to 40 Watts

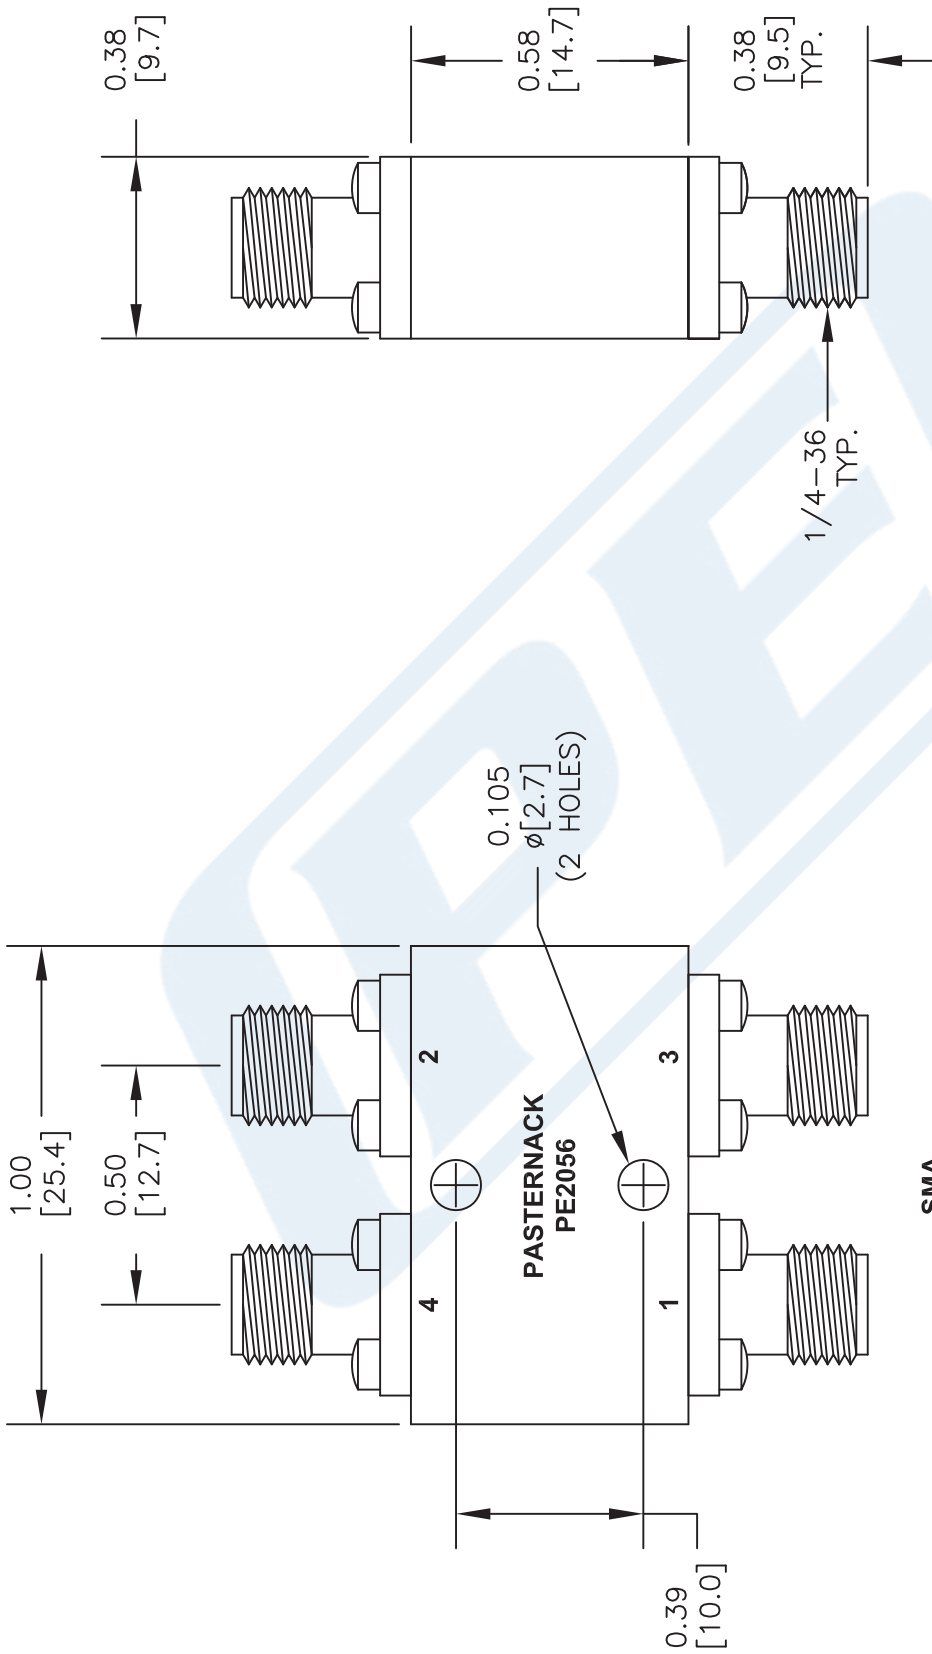

SMA  
FEMALE  
TYP.

STANDARD TOLERANCES

DECIMAL ±0.02  
.XX ±0.010  
.XXX ±0.010

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PORT CONFIGURATION

INPUT	90° OUTPUT	0° OUTPUT	ISOLATED
1	4	2	3

DWG TITLE

**PE2056**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 042516

SCALE N/A

SIZE A

3045



**PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com