



## Dual Directional 50 dB N Coupler From 80 MHz to 1,000 MHz Rated To 200 Watts

### TECHNICAL DATA SHEET

PE2CP1021

#### Configuration

Connector 1	N Female
Connector 2	N Female
Coupled Connectors	SMA Female
Design	Dual Directional Coupler

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	80		1,000	MHz
Directivity	20			dB
Impedance		50		Ohms
Insertion Loss			0.3	dB
Input Power			200	Watts
Input VSWR			1.25:1	
Coupling Value		50		dB
Coupling Tolerance			± 1.5	dB
Coupling Flatness			±0.5	dB

Electrical Specification Notes: Values at 25°C, sea level.

#### Mechanical Specifications

##### Temperature

Operating Range +85 to -55 deg C

##### Size

Length 2.5 in [63.5 mm]  
 Width/Dia. 1.11 in [28.19 mm]  
 Height 1.5 in [38.1 mm]

Housing Material and Plating Aluminum Alloy, Chem Film

#### Connectors

Description	Connector 1	Connector 2	Coupled Connectors
Type	N Female	N Female	SMA Female

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Dual Directional 50 dB N Coupler From 80 MHz to 1,000 MHz Rated To 200 Watts PE2CP1021](#)



## Dual Directional 50 dB N Coupler From 80 MHz to 1,000 MHz Rated To 200 Watts

### TECHNICAL DATA SHEET

PE2CP1021

#### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Dual Directional 50 dB N Coupler From 80 MHz to 1,000 MHz Rated To 200 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Dual Directional 50 dB N Coupler From 80 MHz to 1,000 MHz Rated To 200 Watts PE2CP1021](#)

URL: <http://www.pasternack.com/dual-directional-50-db-n-coupler-80-1000-mhz-200-watts-pe2cp1021-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE2CP1021 CAD Drawing

Dual Directional 50 dB N Coupler From 80 MHz to 1,000 MHz Rated To 200 Watts

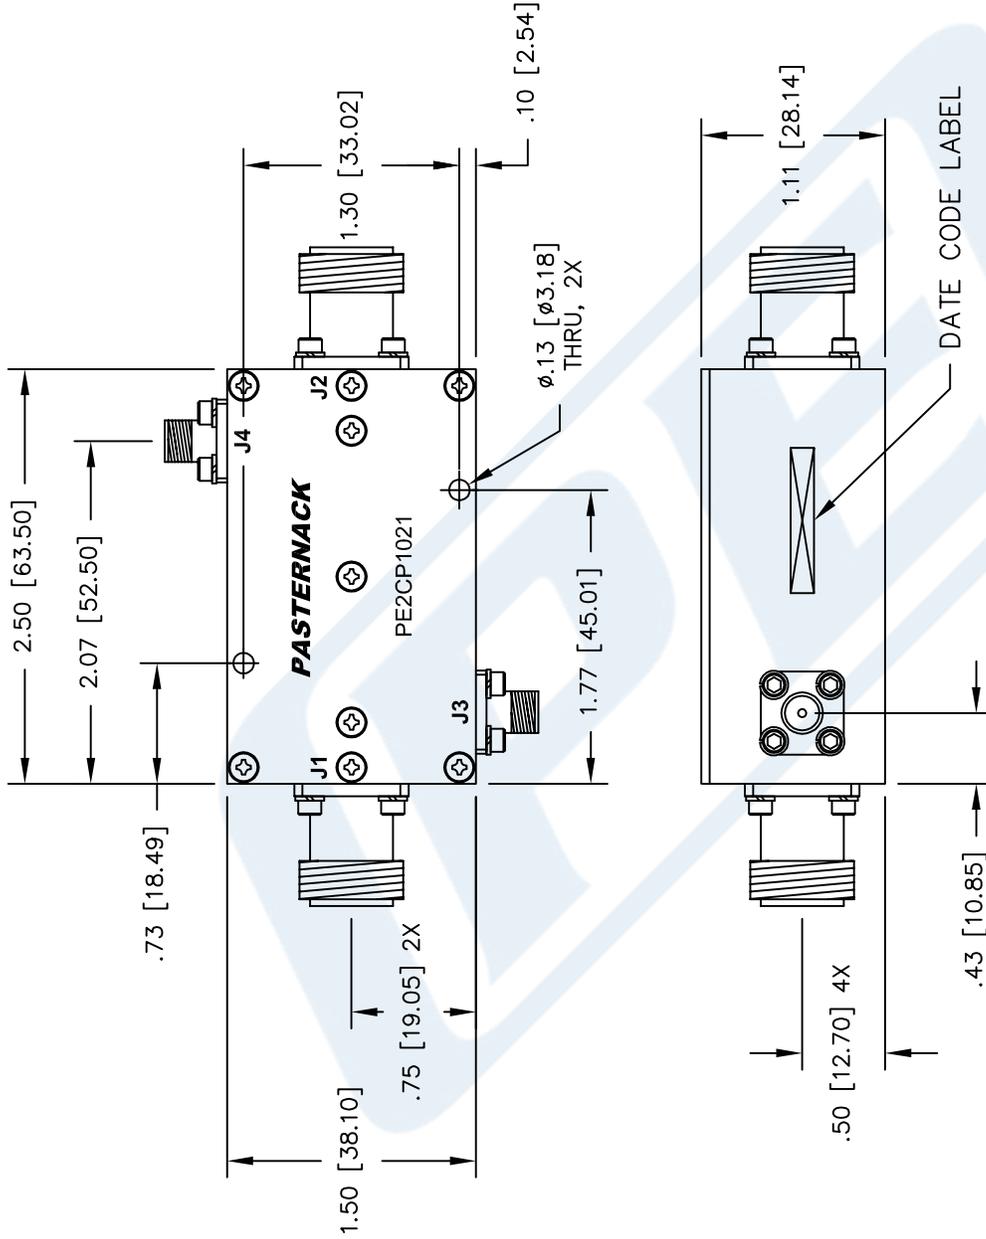

INPUT	OUTPUT	FORWARD COUPLING	REFLECTED COUPLING
J1	J2	J3	J4
J2	J1	J4	J3

TOLERANCE .XX ±.02  
.XXX ±.005  
ANG. ±1/2°

\* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES (mm).

DWG TITLE  
**PE2CP1021**

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 073115

SCALE N/A

SIZE A

150