

## SMA Male to N Male Cable Using RG316 Coax with HeatShrink

### PE3234/HS




#### Configuration

- Connector 1: SMA Male
- Connector 2: N Male
- Cable Type: RG316
- Coax Flex Type: Flexible

#### Features

- Max Frequency 1 GHz
- 69% Phase Velocity
- FEP Jacket

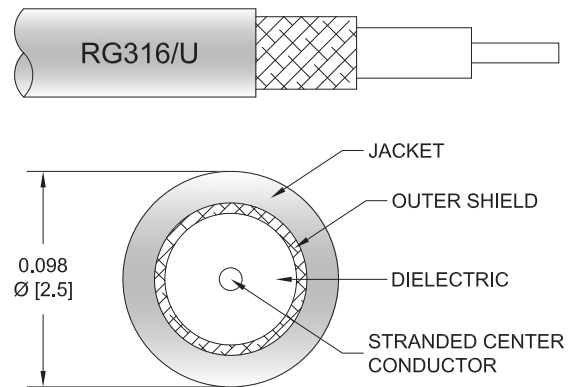

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3234/HS SMA male to type N male cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG316 coax. The PE3234/HS SMA male to type N male cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description             | Minimum | Typical | Maximum | Units |
|-------------------------|---------|---------|---------|-------|
| Frequency Range         | DC      |         | 1,000   | MHz   |
| VSWR                    |         |         | 1.4:1   |       |
| Velocity of Propagation |         | 69      |         | %     |
| Operating Voltage (AC)  |         |         | 335     | Vrms  |
| Jacket Spark            |         |         | 2,000   | Vrms  |

#### Specifications by Frequency

## SMA Male to N Male Cable Using RG316 Coax with HeatShrink



### PE3234/HS

| Part Number  | Length                      | Description           | F1    | F2   | F3   | F4    | F5   | Units | Weight (lbs) |
|--------------|-----------------------------|-----------------------|-------|------|------|-------|------|-------|--------------|
|              |                             | Frequency             | 50    | 100  | 250  | 500   | 1000 | MHz   |              |
| PE3234/HS    | Custom Lengths<br>Available | Insertion Loss (Typ.) | 0.075 | 0.11 | 0.16 | 0.238 | 0.38 | dB/ft |              |
|              |                             |                       | 0.25  | 0.37 | 0.53 | 0.79  | 1.25 | dB/m  |              |
| PE3234/HS-12 | 12 inch                     | Insertion Loss (Typ.) | 0.28  | 0.31 | 0.36 | 0.44  | 0.58 | dB    | 0.084        |
| PE3234/HS-24 | 24 inch                     | Insertion Loss (Typ.) | 0.35  | 0.42 | 0.52 | 0.68  | 0.96 | dB    | 0.095        |
| PE3234/HS-36 | 36 inch                     | Insertion Loss (Typ.) | 0.43  | 0.53 | 0.68 | 0.92  | 1.34 | dB    | 0.105        |
| PE3234/HS-48 | 48 inch                     | Insertion Loss (Typ.) | 0.5   | 0.64 | 0.84 | 1.16  | 1.72 | dB    | 0.115        |
| PE3234/HS-72 | 72 inch                     | Insertion Loss (Typ.) | 0.65  | 0.86 | 1.16 | 1.63  | 2.48 | dB    | 0.135        |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

|                             |                |
|-----------------------------|----------------|
| Loss due to Connector 1:    | 0.1 dB         |
| Loss due to Connector 2:    | 0.1 dB         |
| Base Weight:                | 0.084 pounds   |
| Additional Weight per Inch: | 0.00084 pounds |

### Mechanical Specifications

#### Cable Assembly

|                |                     |
|----------------|---------------------|
| Width/Diameter | 0.5 in [12.7 mm]    |
| Weight         | 0.074 lbs [33.57 g] |

#### Cable

|                                      |                            |
|--------------------------------------|----------------------------|
| Cable Type                           | RG316                      |
| Impedance                            | 50 Ohms                    |
| Inner Conductor Type                 | Stranded                   |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver  |
| Dielectric Type                      | PTFE                       |
| Number of Shields                    | 1                          |
| Shield Layer 1                       | Silver Plated Copper Braid |
| Jacket Material                      | FEP, Tan                   |
| Jacket Diameter                      | 0.102 in [2.59 mm]         |

## SMA Male to N Male Cable Using RG316 Coax with HeatShrink



### PE3234/HS

#### Connectors

| Description                        | Connector 1      | Connector 2     |
|------------------------------------|------------------|-----------------|
| Type                               | SMA Male         | N Male          |
| Specification                      | MIL-STD-348A     | MIL-STD-348A    |
| Impedance                          | 50 Ohms          | 50 Ohms         |
| Configuration                      | Straight         | Straight        |
| Contact Material and Plating       | Brass, Gold      | Brass, Gold     |
| Contact Plating Specification      | 30 µin minimum   | 30 µin minimum  |
| Dielectric Type                    | PTFE             | PTFE            |
| Body Material and Plating          | Brass, Nickel    | Brass, Nickel   |
| Body Plating Specification         | 100 µin minimum  | 100 µin minimum |
| Coupling Nut Material and Plating  | Brass, Nickel    | Brass, Nickel   |
| Coupling Nut Plating Specification | 100 µin minimum  | 100 µin minimum |
| Hex Size                           | 5/16 inch        |                 |
| Torque                             | 3 in-lbs 0.34 Nm |                 |

#### Environmental Specifications

Operating Range Temperature -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## SMA Male to N Male Cable Using RG316 Coax with HeatShrink

### PE3234/HS



#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3234/HS - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE3234/HS-12 = 12 inches long cable  
PE3234/HS-100cm = 100 cm long cable


SMA Male to N Male Cable Using RG316 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Cable Using RG316 Coax with HeatShrink PE3234/HS](#)

URL: <https://www.pasternack.com/sma-male-to-n-male-cable-using-rg316-with-heatshrink-pe3234-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3234/HS CAD Drawing
SMA Male to N Male Cable Using RG316 Coax with HeatShrink

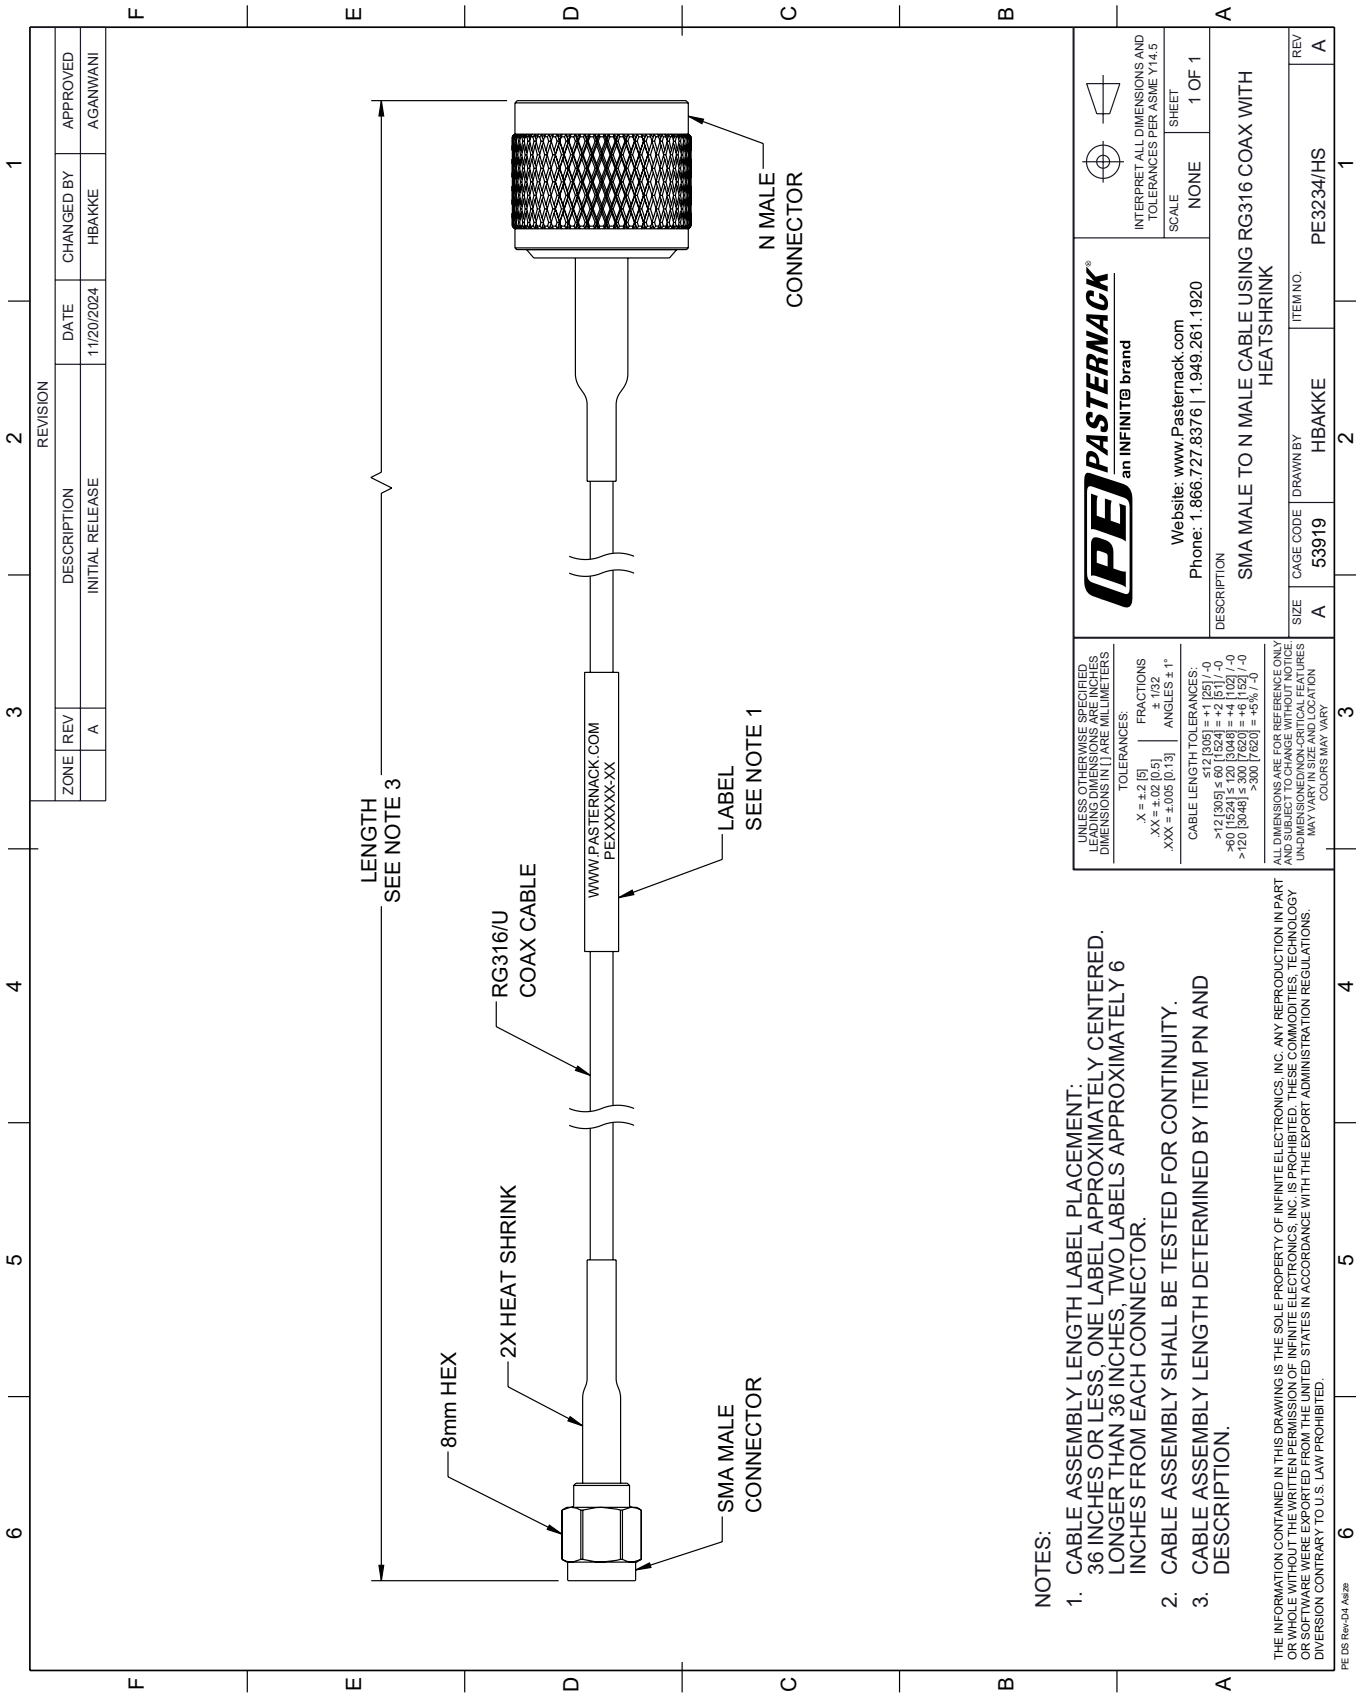

NOTES:

- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE NOT EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

PE DS Rev-D4 Adda