

SMA Male to N Male Cable Using PE-SR402FL Coax, LF Solder

PE3448LF



Configuration

- Connector 1: SMA Male
- Connector 2: N Male
- Cable Type: PE-SR402FL
- Coax Flex Type: Formable

Features

- Max Frequency 11 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity



Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3448LF SMA male to type N male cable using PE-SR402FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to type N cable assembly has a male to male gender configuration with 50 ohm formable PE-SR402FL coax. The PE3448LF SMA male to type N male cable assembly operates to 11 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	11	GHz

SMA Male to N Male Cable Using PE-SR402FL Coax, LF Solder

PE3448LF



Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Insertion Loss (Typ.)	0.259	0.319	0.379	0.48	0.643	dB/ft
	0.85	1.05	1.24	1.57	2.11	dB/m

Mechanical Specifications

Cable Assembly

Width/Diameter	0.827 in [21.01 mm]
Weight	0.116 lbs [52.62 g]

Cable

Cable Type	PE-SR402FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.57 in [39.88 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	N Male
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50µ in. minimum	20 µin minimum
Dielectric Type	Teflon	PTFE
Body Material and Plating	Stainless Steel, Gold	Brass, Gold
Body Plating Specification	10µ in. minimum	80 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100µ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs 0.57 Nm	
Seal Gasket Material		Silicone

SMA Male to N Male Cable Using PE-SR402FL Coax, LF Solder



PE3448LF

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

Typical Performance Data

How to Order

Part Number Configuration:

PE3448LF **- xx** **uu**

└──────────┬──────────┬──────────┘

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3448LF-12 = 12 inches long cable
PE3448LF-100cm = 100 cm long cable


SMA Male to N Male Cable Using PE-SR402FL Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Cable Using PE-SR402FL Coax, LF Solder PE3448LF](#)

URL: <https://www.pasternack.com/sma-male-to-n-male-cable-using-pe-sr402fl-lf-solder-pe3448lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3448LF CAD Drawing
SMA Male to N Male Cable Using PE-SR402FL Coax, LF Solder

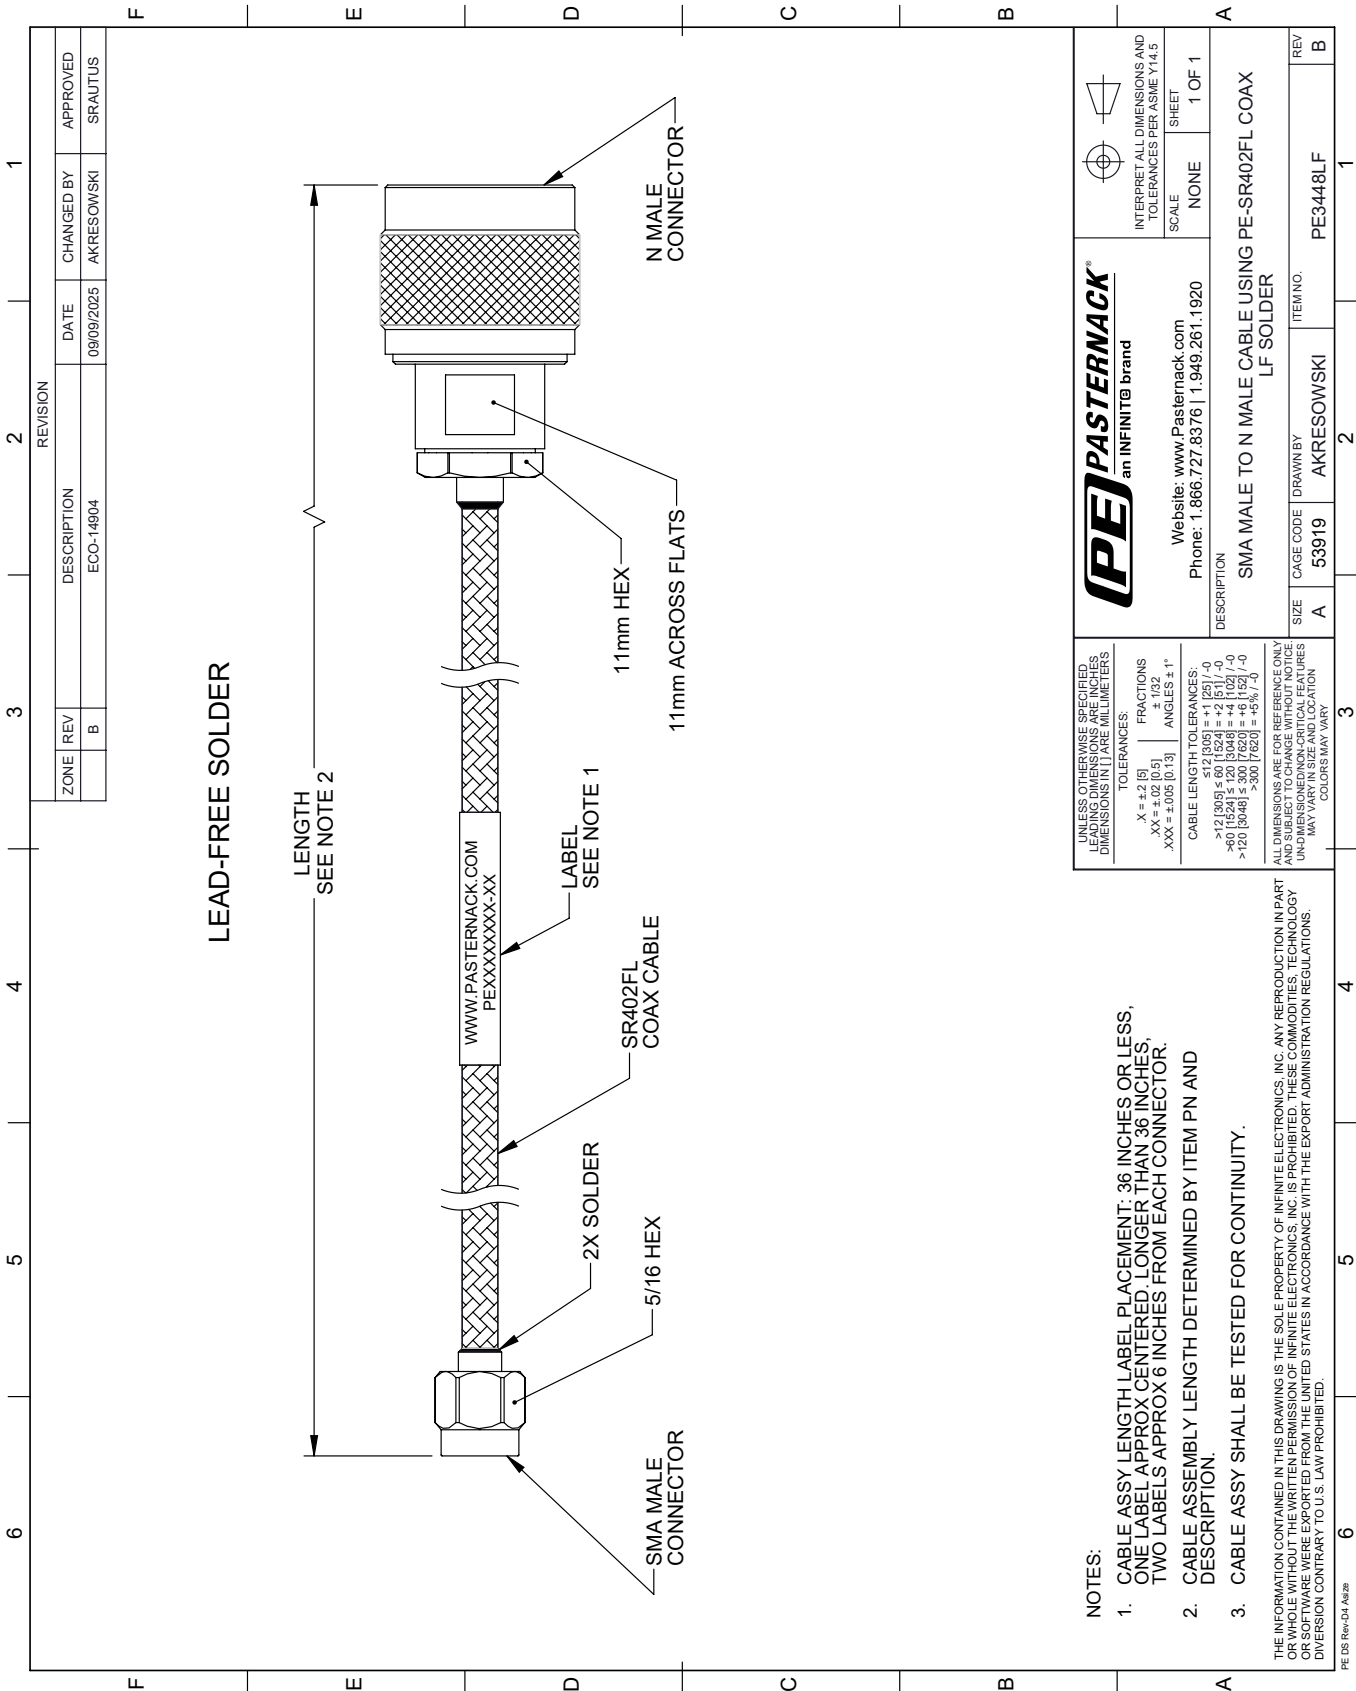

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		(PE) PASTERNAK® an INFINITE® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		FRACTIONS		SCALE	
.X = ±.2 [5]		± 1/32		NONE	
.XX = ±.02 [0.5]		± 1/16		SHEET	
.XXX = ±.005 [0.13]		ANGLES ± 1°		1 OF 1	
CABLE LENGTH TOLERANCES:		Website: www.Pasternack.com		Phone: 1.866.727.8376 1.949.261.1920	
>12 [305] ≤ 60 [1524] = ±.2 [5] / -0		DESCRIPTION		SMA MALE TO N MALE CABLE USING PE-SR402FL COAX LF SOLDER	
>60 [1524] ≤ 120 [3048] = ±.4 [102] / -0		SIZE		CAGE CODE	
>120 [3048] ≤ 300 [7620] = ±.5 [12.7] / -0		A		53919	
ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS OF INDIVIDUAL PARTS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.		DRAWN BY		ITEM NO.	
		AKRESOWSKI		PE3448LF	
		REV		B	