

## MMCX Plug to MMCX Plug Cable Using RG178 Coax with HeatShrink, LF Solder




### PE34599LF/HS

#### Configuration

- Connector 1: MMCX Plug
- Connector 2: MMCX Plug
- Cable Type: RG178
- Coax Flex Type: Flexible

#### Features

- 70% Phase Velocity
- FEP Jacket

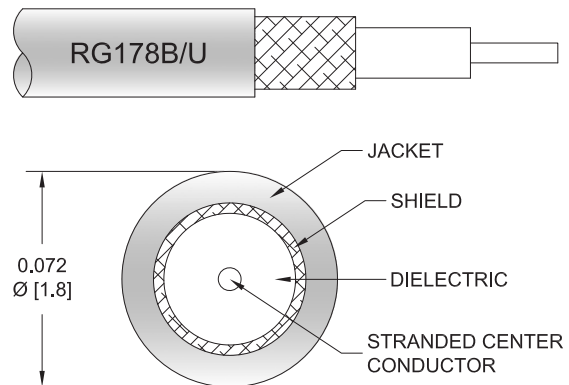

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE34599LF/HS MMCX plug to MMCX plug cable using RG178 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MMCX to MMCX cable assembly has a plug to plug gender configuration with 50 ohm flexible RG178 coax.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.014 lbs [6.35 g]

##### Cable

Cable Type	RG178
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1

## MMCX Plug to MMCX Plug Cable Using RG178 Coax with HeatShrink, LF Solder



### PE34599LF/HS

Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.072 in [1.83 mm]
Repeated Minimum Bend Radius	0.4 in [10.16 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug	MMCX Plug
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Gold	Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## MMCX Plug to MMCX Plug Cable Using RG178 Coax with HeatShrink, LF Solder



### PE34599LF/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE34599LF/HS - xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE34599LF/HS-12 = 12 inches long cable  
PE34599LF/HS-100cm = 100 cm long cable

MMCX Plug to MMCX Plug Cable Using RG178 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Cable Using RG178 Coax with HeatShrink, LF Solder PE34599LF/HS](#)

URL: <https://www.pasternack.com/mmcx-plug-to-mmcx-plug-cable-using-rg178-with-heatshrink-lf-solder-pe34599lf-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE34599LF/HS CAD Drawing

MMCX Plug to MMCX Plug Cable Using RG178 Coax with HeatShrink, LF Solder

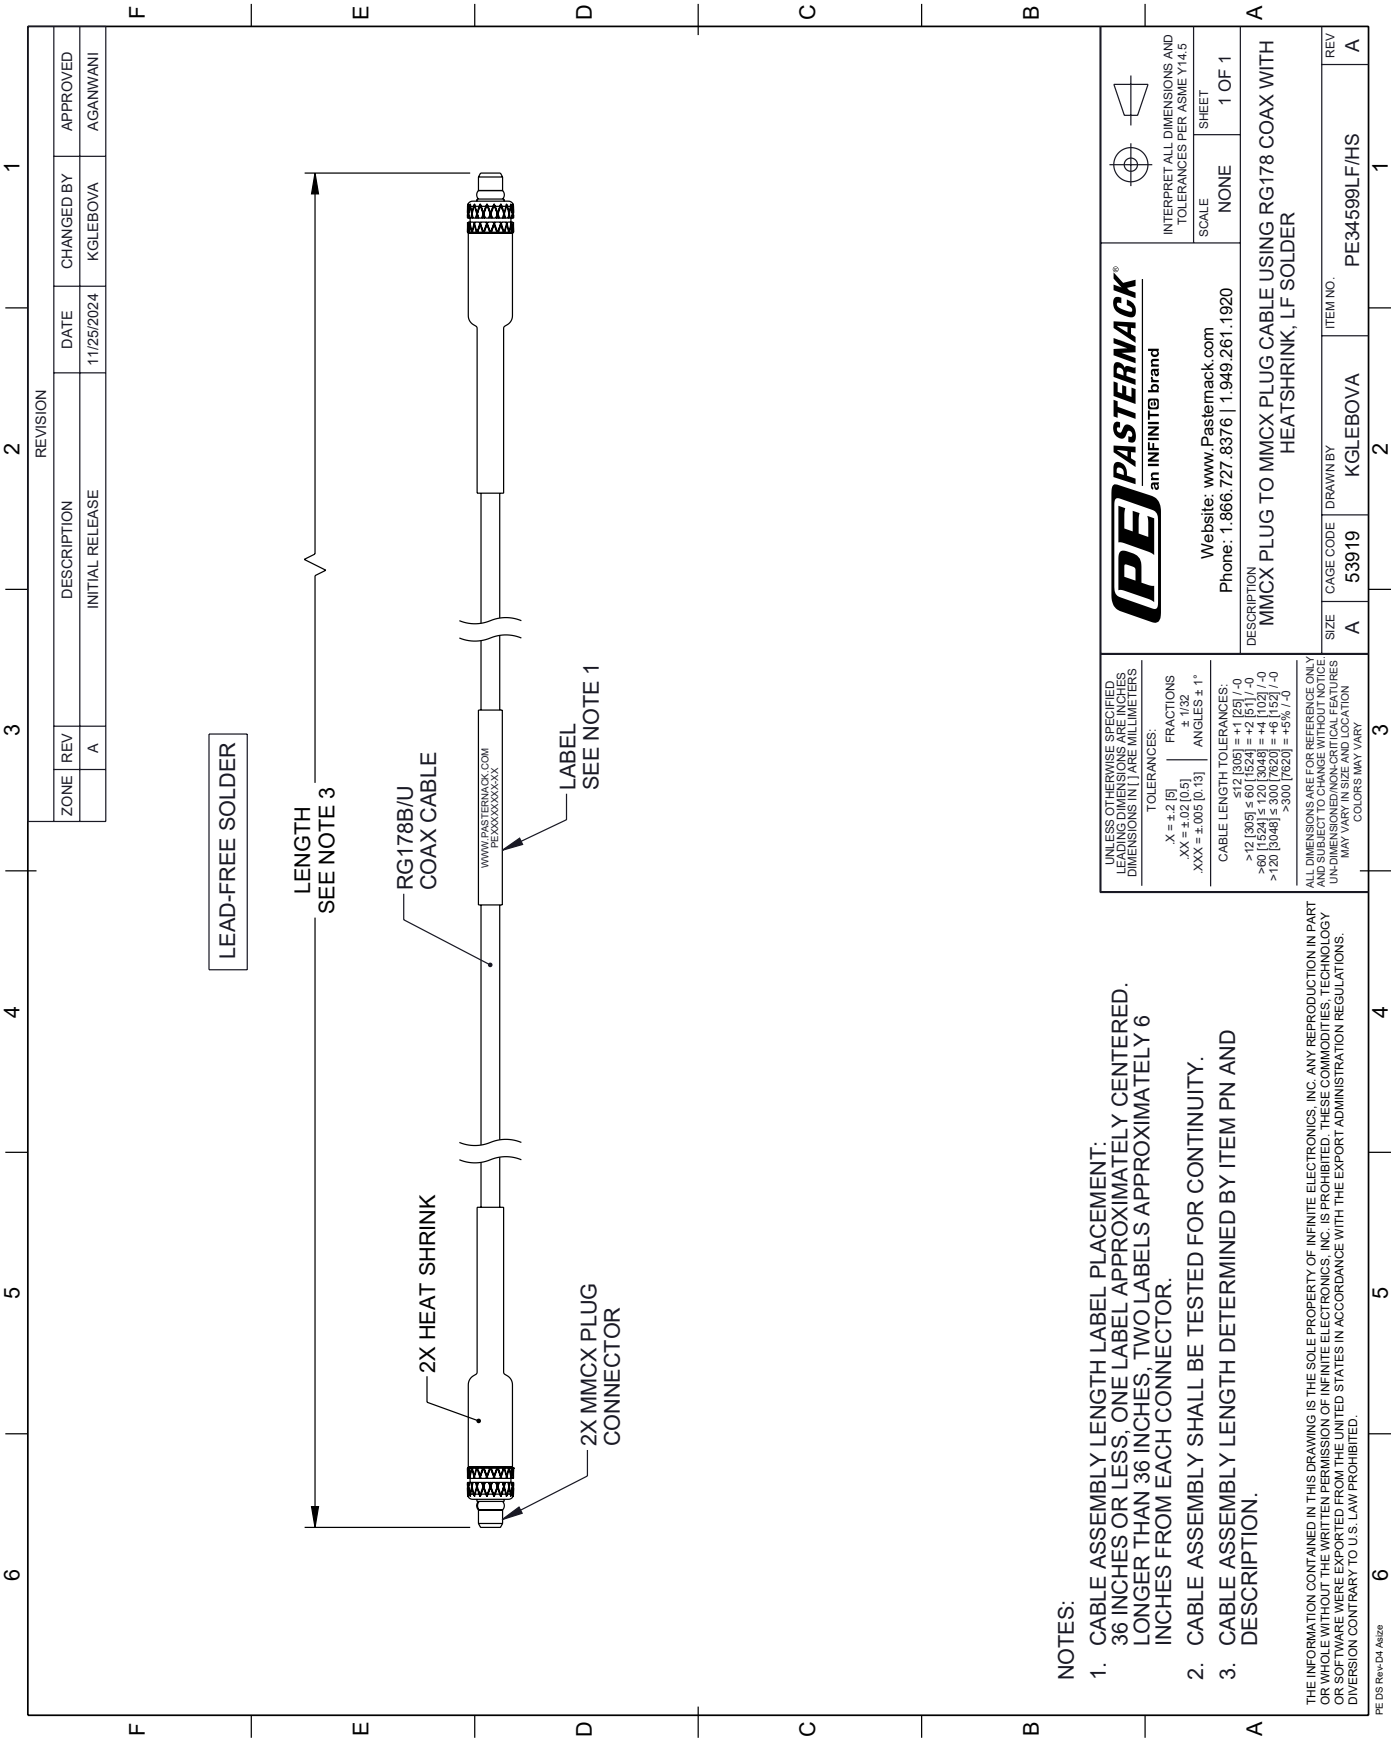

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:  
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.  
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6  
INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND  
DESCRIPTION.