



2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet


PE360-36

Configuration

- Connector 1: 2.92mm Male
- Connector 2: 2.92mm Male
- Cable Type: PE-P160

Features

- Max Frequency 40 GHz
- Shielding Effectivity > 90 dB
- 78% Phase Velocity
- Triple Shielded
- ETFE Jacket

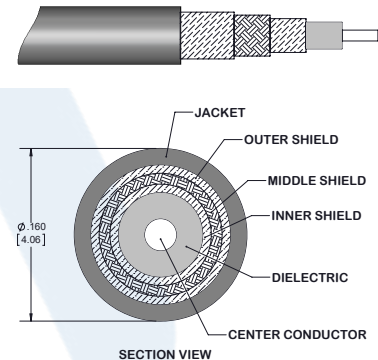

Applications

- General Purpose
- Test & Measurement
- Laboratory Use

Description

Pasternack's PE360-36 2.92mm male to 2.92mm male 36 inch cable using PE-P160 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm flexible PE-P160 coax. The PE360-36 2.92mm male to 2.92mm male cable assembly operates to 40 GHz. The triple shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with Heat-Shrink, LF Solder PE360-36](#)



2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE360-36

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|-----------|---------|--------------|
| Frequency Range | DC | | 40 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 78 | | % |
| RF Shielding | 90 | | | dB |
| Capacitance | | 26 [85.3] | | pF/ft [pF/m] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 2.5 | 5 | 10 | 18 | 40 | GHz |
| Insertion Loss (Max.) | 0.8 | 1.2 | 1.7 | 2.4 | 3.9 | dB |
| Insertion Loss (Typ.) | 0.76 | 1.11 | 1.61 | 2.25 | 3.56 | dB |

Electrical Specification Notes:

Theoretical insertion loss data is calculated with the assumption that cables are tested in a straight geometry. The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of $0.05 \cdot \text{SQRT}(\text{FGHz})$ dB per connector.

Mechanical Specifications

Cable Assembly

| | |
|---------|--------------------|
| Length* | 36 in [914.4 mm] |
| Weight | 0.017 lbs [7.71 g] |

Cable

| | |
|--------------------------------------|----------------------------|
| Cable Type | PE-P160 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 3 |
| Shield Layer 1 | Silver Plated Copper Braid |
| Shield Layer 2 | Aluminum Tape |
| Shield Layer 3 | Silver Plated Copper Braid |
| Jacket Material | ETFE, Gray |
| Jacket Diameter | 0.16 in [4.06 mm] |
| Repeated Minimum Bend Radius | 0.8 in [20.32 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with Heat-Shrink, LF Solder PE360-36](#)



2.92mm Male to 2.92mm Male Test Cable 36 Inch Length
Using PE-P160 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE360-36

Typical Flex Cycles 10,000

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|----------------------------|----------------------------|
| Type | 2.92mm Male | 2.92mm Male |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Contact Plating Specification | ASTM-B488 50 µin minimum | ASTM-B488 50 µin minimum |
| Dielectric Type | PEI | PEI |
| Body Material and Plating | Passivated Stainless Steel | Passivated Stainless Steel |
| Body Plating Specification | SAE-AMS-2700 | SAE-AMS-2700 |
| Coupling Nut Material and Plating | Passivated Stainless Steel | Passivated Stainless Steel |
| Coupling Nut Plating Specification | SAE-AMS-2700 | SAE-AMS-2700 |
| Hex Size | 5/16 inch | 5/16 inch |
| Torque | 8 in-lbs [0.9 Nm] | 8 in-lbs [0.9 Nm] |

Environmental Specifications

Temperature

Operating Range -45 to +90 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with Heat-Shrink, LF Solder PE360-36](#)




2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE360-36

How to Order

Part Number Configuration:

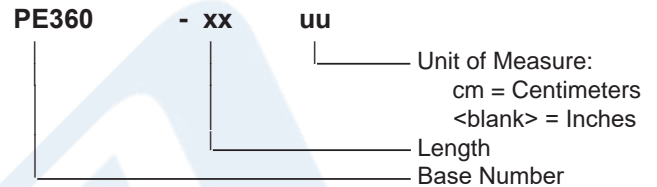

Example: PE360-12 = 12 inches long cable
PE360-100cm = 100 cm long cable

2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Test Cable 36 Inch Length Using PE-P160 Coax with HeatShrink, LF Solder PE360-36](https://www.pasternack.com/2.92mm-male-2.92mm-male-pe-p160-cable-assembly-pe360-36-p.aspx)

URL: <https://www.pasternack.com/2.92mm-male-2.92mm-male-pe-p160-cable-assembly-pe360-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE360-36 CAD Drawing

2.92mm Male to 2.92mm Male Test Cable 36 Inch Length
Using PE-P160 Coax with HeatShrink, LF Solder

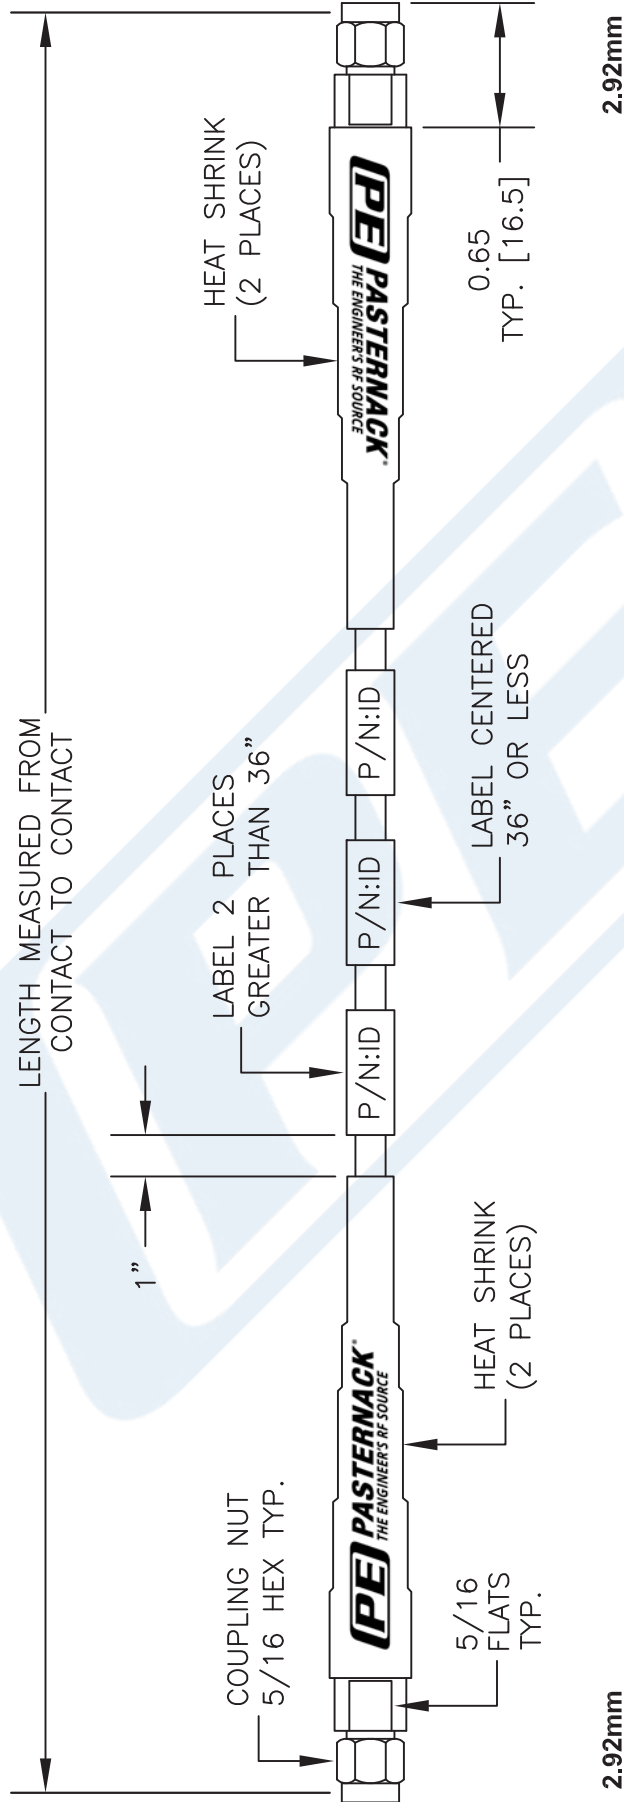

| STANDARD TOLERANCES | |
|---------------------|-------|
| .X | ±0.2 |
| .XX | ±0.1 |
| .XXX | ±0.05 |

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE360

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

| | | | | | | |
|----------|--------|-------|-----|------|---|-------|
| CAD FILE | 110816 | SCALE | N/A | SIZE | A | 41742 |
|----------|--------|-------|-----|------|---|-------|

FSCM NO. 53919