

## SMA Male Right Angle to SSMB Plug Right Angle Cable Using RG316 Coax with HeatShrink




### PE36419/HS

#### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SSMB Plug Right Angle
- Cable Type: RG316
- Coax Flex Type: Flexible

#### Features

- 69% Phase Velocity
- FEP Jacket

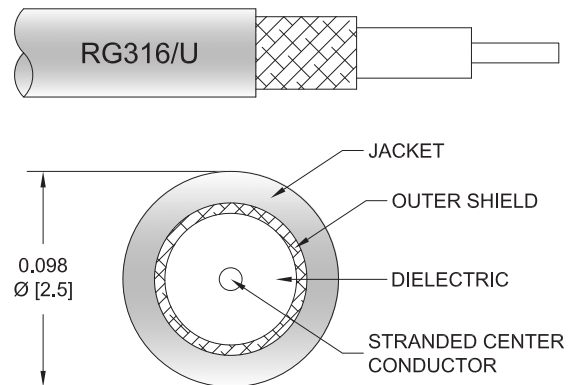

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE36419/HS SMA male right angle to SSMB plug right angle cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SSMB cable assembly has a male to plug gender configuration with 50 ohm flexible RG316 coax. The right angle SMA and right angle SSMB interfaces on the RG316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Jacket Spark			2,000	Vrms

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter 0.5 in [12.7 mm]  
Weight lbs [0 g]

##### Cable

Cable Type RG316  
Impedance 50 Ohms  
Inner Conductor Type Stranded

## SMA Male Right Angle to SSMB Plug Right Angle Cable Using RG316 Coax with HeatShrink



### PE36419/HS

Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SSMB Plug Right Angle
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Brass, Gold	Gold
Contact Plating Specification	50 µin minimum	MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification	100 µin minimum	MIL-G-45204
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	5/16 inch	
Torque	3 in-lbs 0.34 Nm	

### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

## SMA Male Right Angle to SSMB Plug Right Angle Cable Using RG316 Coax with HeatShrink



### PE36419/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE36419/HS - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE36419/HS-12 = 12 inches long cable  
PE36419/HS-100cm = 100 cm long cable

SMA Male Right Angle to SSMB Plug Right Angle Cable Using RG316 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SSMB Plug Right Angle Cable Using RG316 Coax with HeatShrink PE36419/HS](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-ssmb-plug-cable-using-rg316-with-heatshrink-pe36419-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE36419/HS CAD Drawing

SMA Male Right Angle to SSMB Plug Right Angle Cable Using RG316 Coax with HeatShrink

