

## SHV Jack Bulkhead to SHV Plug Cable Using RG214 Coax with HeatShrink




### PE36503/HS

#### Configuration

- Connector 1: SHV Jack Bulkhead
- Connector 2: SHV Plug
- Cable Type: RG214
- Coax Flex Type: Flexible

#### Features

- 66% Phase Velocity
- Double Shielded
- PVC Jacket

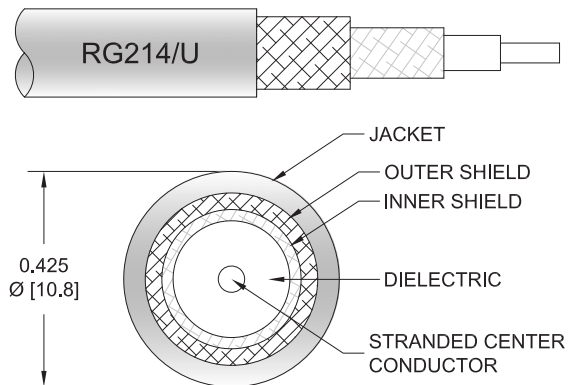

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE36503/HS SHV jack bulkhead to SHV plug cable using RG214 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SHV to SHV cable assembly has a jack to plug gender configuration with 50 ohm flexible RG214 coax. Our RF cable assembly with SHV bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

#### Mechanical Specifications

##### Cable Assembly

Weight 0.287 lbs [130.18 g]

##### Cable

Cable Type RG214  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper, Silver  
Dielectric Type PE

## SHV Jack Bulkhead to SHV Plug Cable Using RG214 Coax with HeatShrink



### PE36503/HS

Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.425 in [10.8 mm]
Repeated Minimum Bend Radius	1.6 in [40.64 mm]

### Connectors

Description	Connector 1	Connector 2
Type	SHV Jack Bulkhead	SHV Plug
Specification	MIL-STD-348	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Silver	Brass, Gold
Contact Plating Specification	QQ-S-365	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

## SHV Jack Bulkhead to SHV Plug Cable Using RG214 Coax with HeatShrink



### PE36503/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE36503/HS - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE36503/HS-12 = 12 inches long cable  
PE36503/HS-100cm = 100 cm long cable

SHV Jack Bulkhead to SHV Plug Cable Using RG214 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Jack Bulkhead to SHV Plug Cable Using RG214 Coax with HeatShrink PE36503/HS](#)

URL: <https://www.pasternack.com/shv-jack-bulkhead-to-shv-plug-cable-using-rg214-with-heatshrink-pe36503-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE36503/HS CAD Drawing
SHV Jack Bulkhead to SHV Plug Cable Using RG214 Coax with HeatShrink

