




1.85mm Male to 1.85mm Male Cable 48 Inch Length
Using PE-SR405FL Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE36525LF-48

Configuration

- Connector 1: 1.85mm Male
- Connector 2: 1.85mm Male
- Cable Type: PE-SR405FL

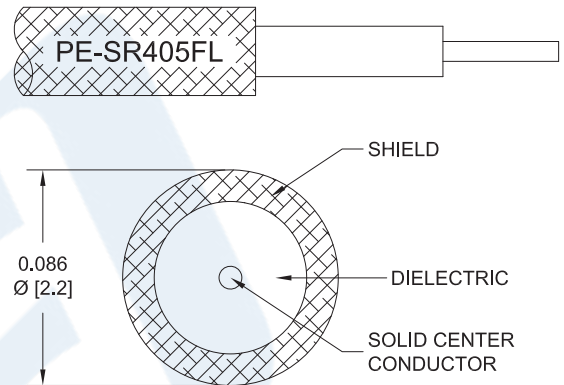

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.5:1	
Return Loss			15.563	dB
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	20	30	40	GHz
Insertion Loss (Typ.)	1.586	2.396	5			dB

Mechanical Specifications

Cable Assembly

Length*	48 in [121.92 cm]
Diameter	0.312 in [7.92 mm]
Weight	0.071 lbs [32.21 g]

Cable

Cable Type	PE-SR405FL
------------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Cable 48 Inch Length Using PE-SR405FL Coax, LF Solder, RoHS PE36525LF-48](#)



1.85mm Male to 1.85mm Male Cable 48 Inch Length
Using PE-SR405FL Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE36525LF-48

Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid

Connectors

Description	Connector 1	Connector 2
Type	1.85mm Male	1.85mm Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204, Type II, Class 1	MIL-G-45204, Type II, Class 1
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	MIL-G-45204, Type II, Class 1	MIL-G-45204, Type II, Class 1
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 in.	5/16 in.
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Cable 48 Inch Length Using PE-SR405FL Coax, LF Solder, RoHS PE36525LF-48](#)



1.85mm Male to 1.85mm Male Cable 48 Inch Length
Using PE-SR405FL Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE36525LF-48

How to Order

Part Number Configuration:

PE36525LF - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE36525LF-12 = 12 inches long cable
PE36525LF-100cm = 100 cm long cable

1.85mm Male to 1.85mm Male Cable 48 Inch Length Using PE-SR405FL Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Cable 48 Inch Length Using PE-SR405FL Coax, LF Solder, RoHS PE36525LF-48](https://www.pasternack.com/1.85mm-male-to-1.85mm-male-pe-sr405fl-cable-assembly-pe36525lf-48-p.aspx)

URL: <https://www.pasternack.com/1.85mm-male-to-1.85mm-male-pe-sr405fl-cable-assembly-pe36525lf-48-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE36525LF-48 CAD Drawing

1.85mm Male to 1.85mm Male Cable 48 Inch Length

Using PE-SR405FL Coax, LF Solder, RoHS

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in Inches

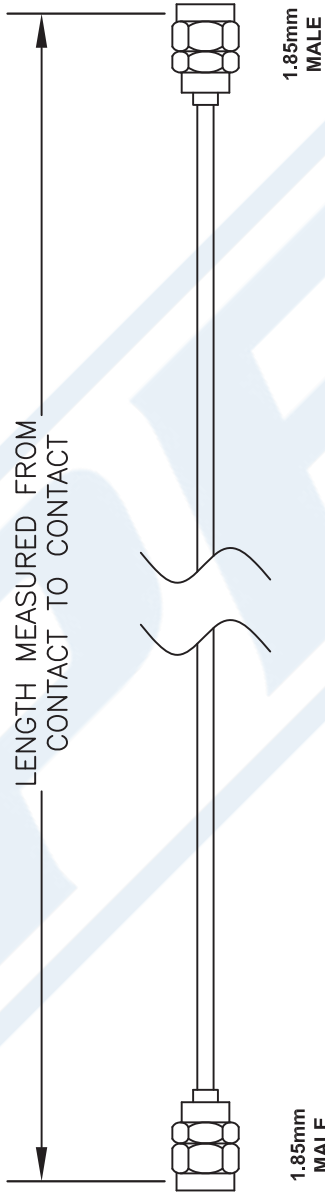

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES (mm).
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE
PE36525LF-XX

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

REV. A	FSCM NO. 53919	CAD FILE 021208	SCALE N/A	SIZE A	127
--------	----------------	-----------------	-----------	--------	-----