

75 Ohm SHV Plug to 75 Ohm Straight Cut Lead Cable Using 75 Ohm RG59 Coax




PE37923

Configuration

- Connector 1: SHV Plug
- Connector 2: Straight Cut Lead
- Cable Type: RG59
- Coax Flex Type: Flexible

Features

- 66% Phase Velocity
- PVC (NC) Jacket

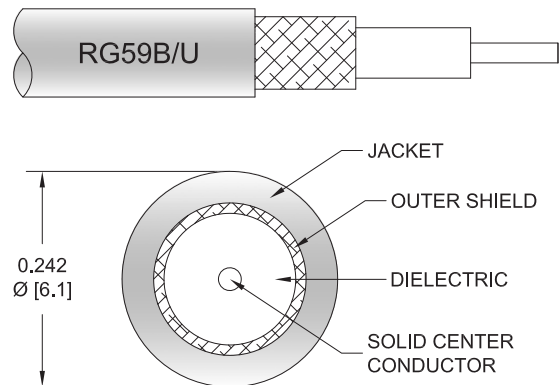

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE37923 75 ohm SHV plug to 75 ohm straight cut lead cable using 75 ohm RG59 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
Capacitance		20.4 [66.93]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.09 lbs [40.82 g]

Cable

Cable Type	RG59
Impedance	75 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	1

75 Ohm SHV Plug to 75 Ohm Straight Cut Lead Cable Using 75 Ohm RG59 Coax



PE37923

Shield Layer 1	Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.242 in [6.15 mm]

Connectors

Description	Connector 1	Connector 2
Type	SHV Plug	Straight Cut Lead
Specification	MIL-STD-348A	
Impedance	75 Ohms	75 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	30 µin minimum	
Dielectric Type	PTFE	
Body Material and Plating	Brass, Nickel	
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

75 Ohm SHV Plug to 75 Ohm Straight Cut Lead Cable Using 75 Ohm RG59 Coax



PE37923

Typical Performance Data

How to Order

Part Number Configuration:

PE37923

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE37923-12 = 12 inches long cable
PE37923-100cm = 100 cm long cable

75 Ohm SHV Plug to 75 Ohm Straight Cut Lead Cable Using 75 Ohm RG59 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm SHV Plug to 75 Ohm Straight Cut Lead Cable Using 75 Ohm RG59 Coax PE37923](https://www.pasternack.com/75-ohm-shv-plug-to-75-ohm-straight-cut-lead-cable-using-rg59-pe37923-p.aspx)

URL: <https://www.pasternack.com/75-ohm-shv-plug-to-75-ohm-straight-cut-lead-cable-using-rg59-pe37923-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE37923 CAD Drawing
75 Ohm SHV Plug to 75 Ohm Straight Cut Lead Cable Using 75 Ohm RG59 Coax

