

N Male to QMA Male Right Angle Cable Using LMR-195 Coax



TECHNICAL DATA SHEET

PE3C0049

N Male to QMA Male Right Angle Cable Using LMR-195 Coax

Configuration

Connector 1	N Male
Connector 2	QMA Male Right Angle
Cable Type	LMR-195

Electrical Specifications

Impedance, Ohms	50
-----------------	----

Mechanical Specifications

Cable Assembly

Cable Type	LMR-195
------------	---------

Temperature

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85
Diameter, in [mm]	0.41 [10.41]
Weight, lbs [g]	0.096 [43.54]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	0.5 [12.7]
Repeated Minimum Bend Radius, in [mm]	2 [50.8]

Cable

No of Shields	2
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter, in [mm]	0.195 [4.95]

Connector 1

Type	N Male
Configuration	Straight

Connector 2

Type	QMA Male Right Angle
Configuration	Right Angle
Inner Conductor Material and Plating	Brass, Gold
Body Material and Plating	Brass, Nexcote
Dielectric Type	PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to QMA Male Right Angle Cable Using LMR-195 Coax PE3C0049](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

N Male to QMA Male Right Angle Cable Using LMR-195 Coax



TECHNICAL DATA SHEET

PE3C0049

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data


Notes:

Values at 25 °C, sea level

URL: <http://www.pasternack.com/n-male-qma-male-lmr195-cable-assembly-pe3c0049-p.aspx>

N Male to QMA Male Right Angle Cable Using LMR-195 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

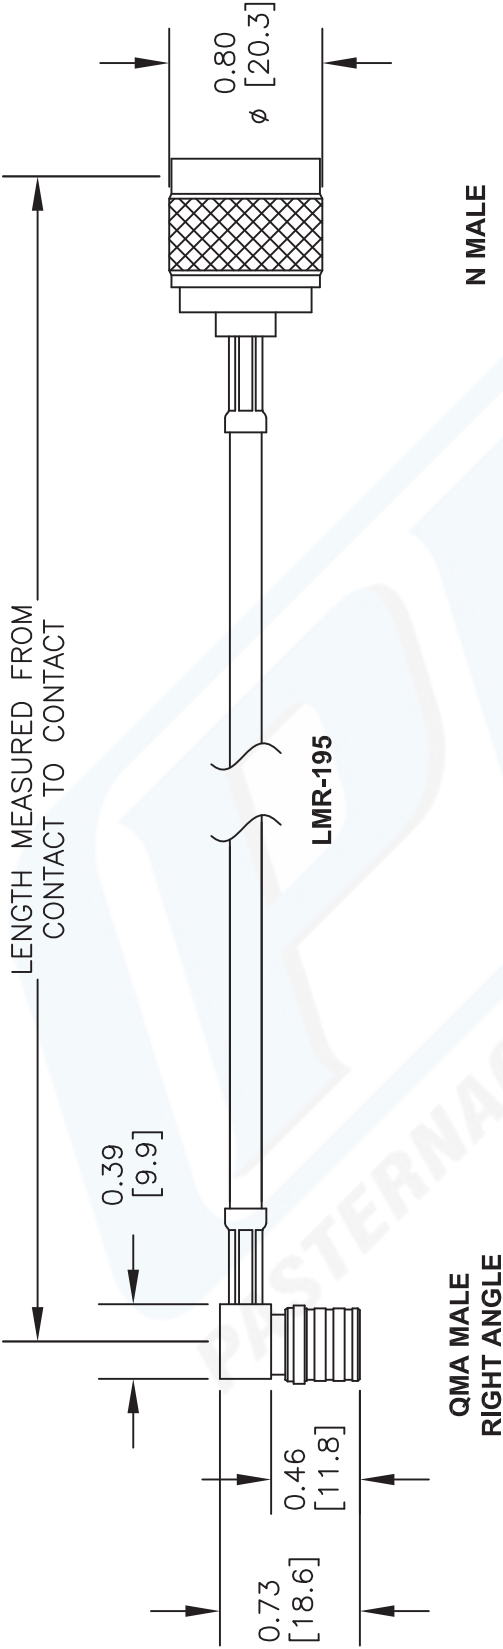

How To Order						
Part Number Configuration			Examples			
PE3 zzz yy - xx uu			PE3000LF-100			
00 - 99999			PE3000-100			
LF = RoHS Compliant < Blank > = Standard			PE3000LF-100CM			
Note: LF applies only to RF cables			PE3000-100CM			

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE

PE3C0049

FSCM NO. 53919		CAD FILE	013113	SCALE	N/A	SIZE	A	2233
----------------	--	----------	--------	-------	-----	------	---	------

**PASTERNAK®**

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com