

LC Male to 7/16 DIN Male Right Angle Cable Using RG393 Coax, LF Solder




PE3C0342LF

Configuration

- Connector 1: LC Male
- Connector 2: 7/16 DIN Male Right Angle
- Cable Type: RG393
- Coax Flex Type: Flexible

Features

- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

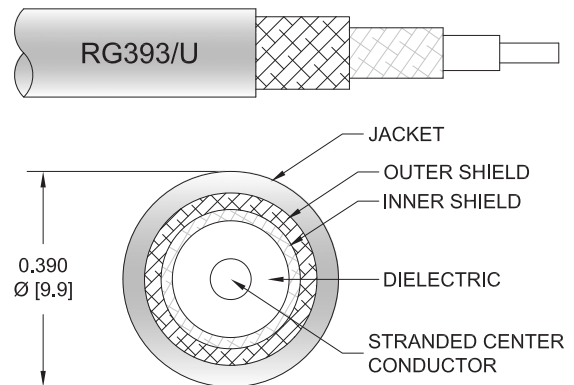

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C0342LF LC male to 7/16 DIN male right angle cable using RG393 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack LC to 7/16 DIN cable assembly has a male to male gender configuration with 50 ohm flexible RG393 coax. The right angle 7/16 DIN interface on the RG393 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69.5		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	1.003 lbs [454.95 g]

Cable

Cable Type	RG393
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver

LC Male to 7/16 DIN Male Right Angle Cable Using RG393 Coax, LF Solder



PE3C0342LF

Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.39 in [9.91 mm]
Repeated Minimum Bend Radius	3.9 in [99.06 mm]

Connectors

Description	Connector 1	Connector 2
Type	LC Male	7/16 DIN Male Right Angle
Specification	MIL-STD-348	MIL-C-39012
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Silver	Silver
Contact Plating Specification	QQ-S-365	QQ-S-365
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	QQ-N-290
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	QQ-N-290	QQ-N-290
Hex Size		1 1/4 inch

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

LC Male to 7/16 DIN Male Right Angle Cable Using RG393 Coax, LF Solder



PE3C0342LF

Typical Performance Data

How to Order

Part Number Configuration:

PE3C0342LF **- xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3C0342LF-12 = 12 inches long cable
 PE3C0342LF-100cm = 100 cm long cable

LC Male to 7/16 DIN Male Right Angle Cable Using RG393 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LC Male to 7/16 DIN Male Right Angle Cable Using RG393 Coax, LF Solder PE3C0342LF](#)

URL: <https://www.pasternack.com/lc-male-to-7-16-din-male-cable-using-rg393-lf-solder-pe3c0342lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

LC Male to 7/16 DIN Male Right Angle Cable Using RG393 Coax, LF Solder

