

## Outdoor Rated 4.3-10 Male to N Male Low PIM Cable Using SPO-250 Coax with Times Microwave Components

### PE3C10332




#### Configuration

- Connector 1: 4.3-10 Male
- Connector 2: N Male
- Cable Type: SPO-250
- Coax Flex Type: Corrugated

#### Features

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- 83% Phase Velocity
- PE Jacket

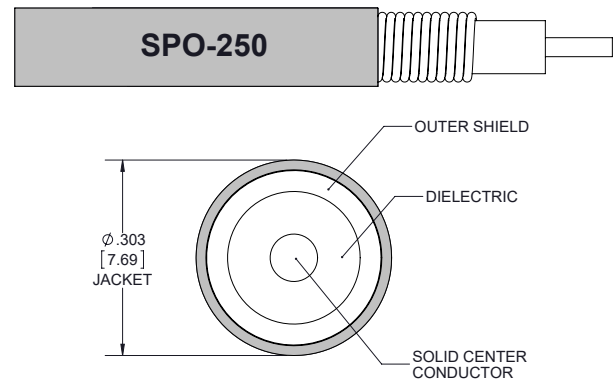

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications

#### Description

Pasternack's PE3C10332 4.3-10 male to type N male cable using SPO-250 coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack 4.3-10 to type N cable assembly has a male to male gender configuration with 50 ohm corrugated SPO-250 coax. The PE3C10332 4.3-10 male to type N male cable assembly operates to 6 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
Passive Intermodulation IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz			-160	dBc
Capacitance		24 [78.74]		pF/ft [pF/m]
Inductance		0.054 [0.18]		uH/ft [uH/m]

#### Specifications by Frequency

## Outdoor Rated 4.3-10 Male to N Male Low PIM Cable Using SPO-250 Coax with Times Microwave Components



### PE3C10332

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	500	1000	2500	6000	MHz	
PE3C10332	Custom Lengths Available	Insertion Loss (Typ.)	0.042	0.06	0.103	0.166	dB/ft	
			0.14	0.2	0.34	0.55	dB/m	
PE3C10332-12	12 In	Insertion Loss (Typ.)	0.4	0.41	0.46	0.52	dB	0.216
PE3C10332-24	24 In	Insertion Loss (Typ.)	0.44	0.47	0.56	0.69	dB	0.264
PE3C10332-36	36 In	Insertion Loss (Typ.)	0.48	0.53	0.66	0.85	dB	0.311
PE3C10332-60	60 In	Insertion Loss (Typ.)	0.52	0.59	0.77	1.02	dB	0.405
PE3C10332-50CM	50 CM	Insertion Loss (Typ.)	0.42	0.45	0.52	0.63	dB	0.247

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.25 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.216 pounds
Additional Weight per Inch:	0.00392 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.216 lbs [97.98 g]

#### Cable

Cable Type	SPO-250
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	Foam PE
Number of Shields	1
Outer Conductor 1 Material and Plating	Copper
Jacket Material	PE, Black
Jacket Diameter	0.303 in [7.7 mm]
One Time Minimum Bend Radius	1.25 in [31.75 mm]
Bending Moment	0.5 lbs-ft [0.68 N-m]

Outdoor Rated 4.3-10 Male to N Male Low PIM Cable  
Using SPO-250 Coax with Times Microwave Components



## PE3C10332

### Connectors

Description	Connector 1	Connector 2
Type	4.3-10 Male	N Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	
Contact Material and Plating	Brass, Silver	Phosphor Bronze, Silver
Contact Plating Specification	200 µin	196 µin
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	100 µin	118 µin
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 µin	118 µin
Torque		7.08 in-lbs 0.8 Nm

### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

## Outdoor Rated 4.3-10 Male to N Male Low PIM Cable Using SPO-250 Coax with Times Microwave Components



### PE3C10332

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3C10332**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE3C10332-12 = 12 inches long cable  
PE3C10332-100cm = 100 cm long cable

Outdoor Rated 4.3-10 Male to N Male Low PIM Cable Using SPO-250 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Outdoor Rated 4.3-10 Male to N Male Low PIM Cable Using SPO-250 Coax with Times Microwave Components PE3C10332](https://www.pasternack.com/outdoor-rated-4.3-10-male-to-n-male-low-pim-cable-using-spo-250-pe3c10332-p.aspx)

URL: <https://www.pasternack.com/outdoor-rated-4.3-10-male-to-n-male-low-pim-cable-using-spo-250-pe3c10332-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C10332 CAD Drawing

Outdoor Rated 4.3-10 Male to N Male Low PIM Cable Using SPO-250 Coax with Times Microwave Components

