

N Male to TNC Male Cable Using LMR-240 Coax

TECHNICAL DATA SHEET


PE3C2346

Configuration

- Connector 1: N Male
- Connector 2: TNC Male
- Cable Type: LMR-240
- Coax Flex Type: Flexible

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

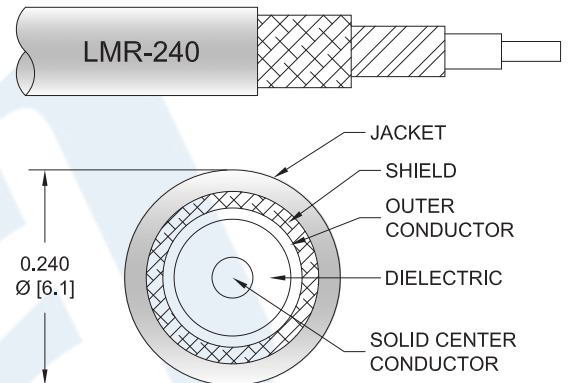

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C2346 type N male to TNC male cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240 coax. The PE3C2346 type N male to TNC male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable Using LMR-240 Coax PE3C2346](#)

N Male to TNC Male Cable Using LMR-240 Coax

TECHNICAL DATA SHEET

PE3C2346

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|----------------------------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 84 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.21 [3.97] | | ns/ft [ns/m] |
| Capacitance | | 24.2 [79.4] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 3.2 [10.5] | | Ω /1000ft [Ω /Km] |
| DC Resistance Outer Conductor | | 3.89 [12.76] | | Ω /1000ft [Ω /Km] |
| Jacket Spark | | | 5,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Max.) | 0.24 | 0.26 | 0.28 | 0.33 | 0.4 | dB/ft |
| | 0.79 | 0.85 | 0.92 | 1.08 | 1.31 | dB/m |

Mechanical Specifications

Cable Assembly

Weight 0.138 lbs [62.6 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable Using LMR-240 Coax PE3C2346](#)

N Male to TNC Male Cable Using LMR-240 Coax

TECHNICAL DATA SHEET

PE3C2346

Cable

| | |
|--------------------------------------|------------------------|
| Cable Type | LMR-240 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.24 in [6.1 mm] |
| One Time Minimum Bend Radius | 0.75 in [19.05 mm] |
| Repeated Minimum Bend Radius | 2.5 in [63.5 mm] |
| Bending Moment | 0.25 lbs-ft [0.34 N-m] |
| Flat Plate Crush | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength | 80 lbs [36.29 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|------------------|-------------------|
| Type | N Male Threaded | TNC Male Threaded |
| Specification | MIL-STD-348 | |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | | 500 |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | | 50 μinch |
| Dielectric Type | PTFE | Teflon |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Specification | | 80 μinch |
| Coupling Nut Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Plating Specification | | 80 μinch |
| Torque | | 8 in-lbs [0.9 Nm] |

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable Using LMR-240 Coax PE3C2346](#)

N Male to TNC Male Cable Using LMR-240 Coax

TECHNICAL DATA SHEET

PE3C2346

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

PE3C2346 - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C2346-12 = 12 inches long cable
PE3C2346-100cm = 100 cm long cable

N Male to TNC Male Cable Using LMR-240 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable Using LMR-240 Coax PE3C2346](#)

URL: <https://www.pasternack.com/n-male-to-tnc-male-cable-using-lmr-240-pe3c2346-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2346 CAD Drawing

N Male to TNC Male Cable Using LMR-240 Coax

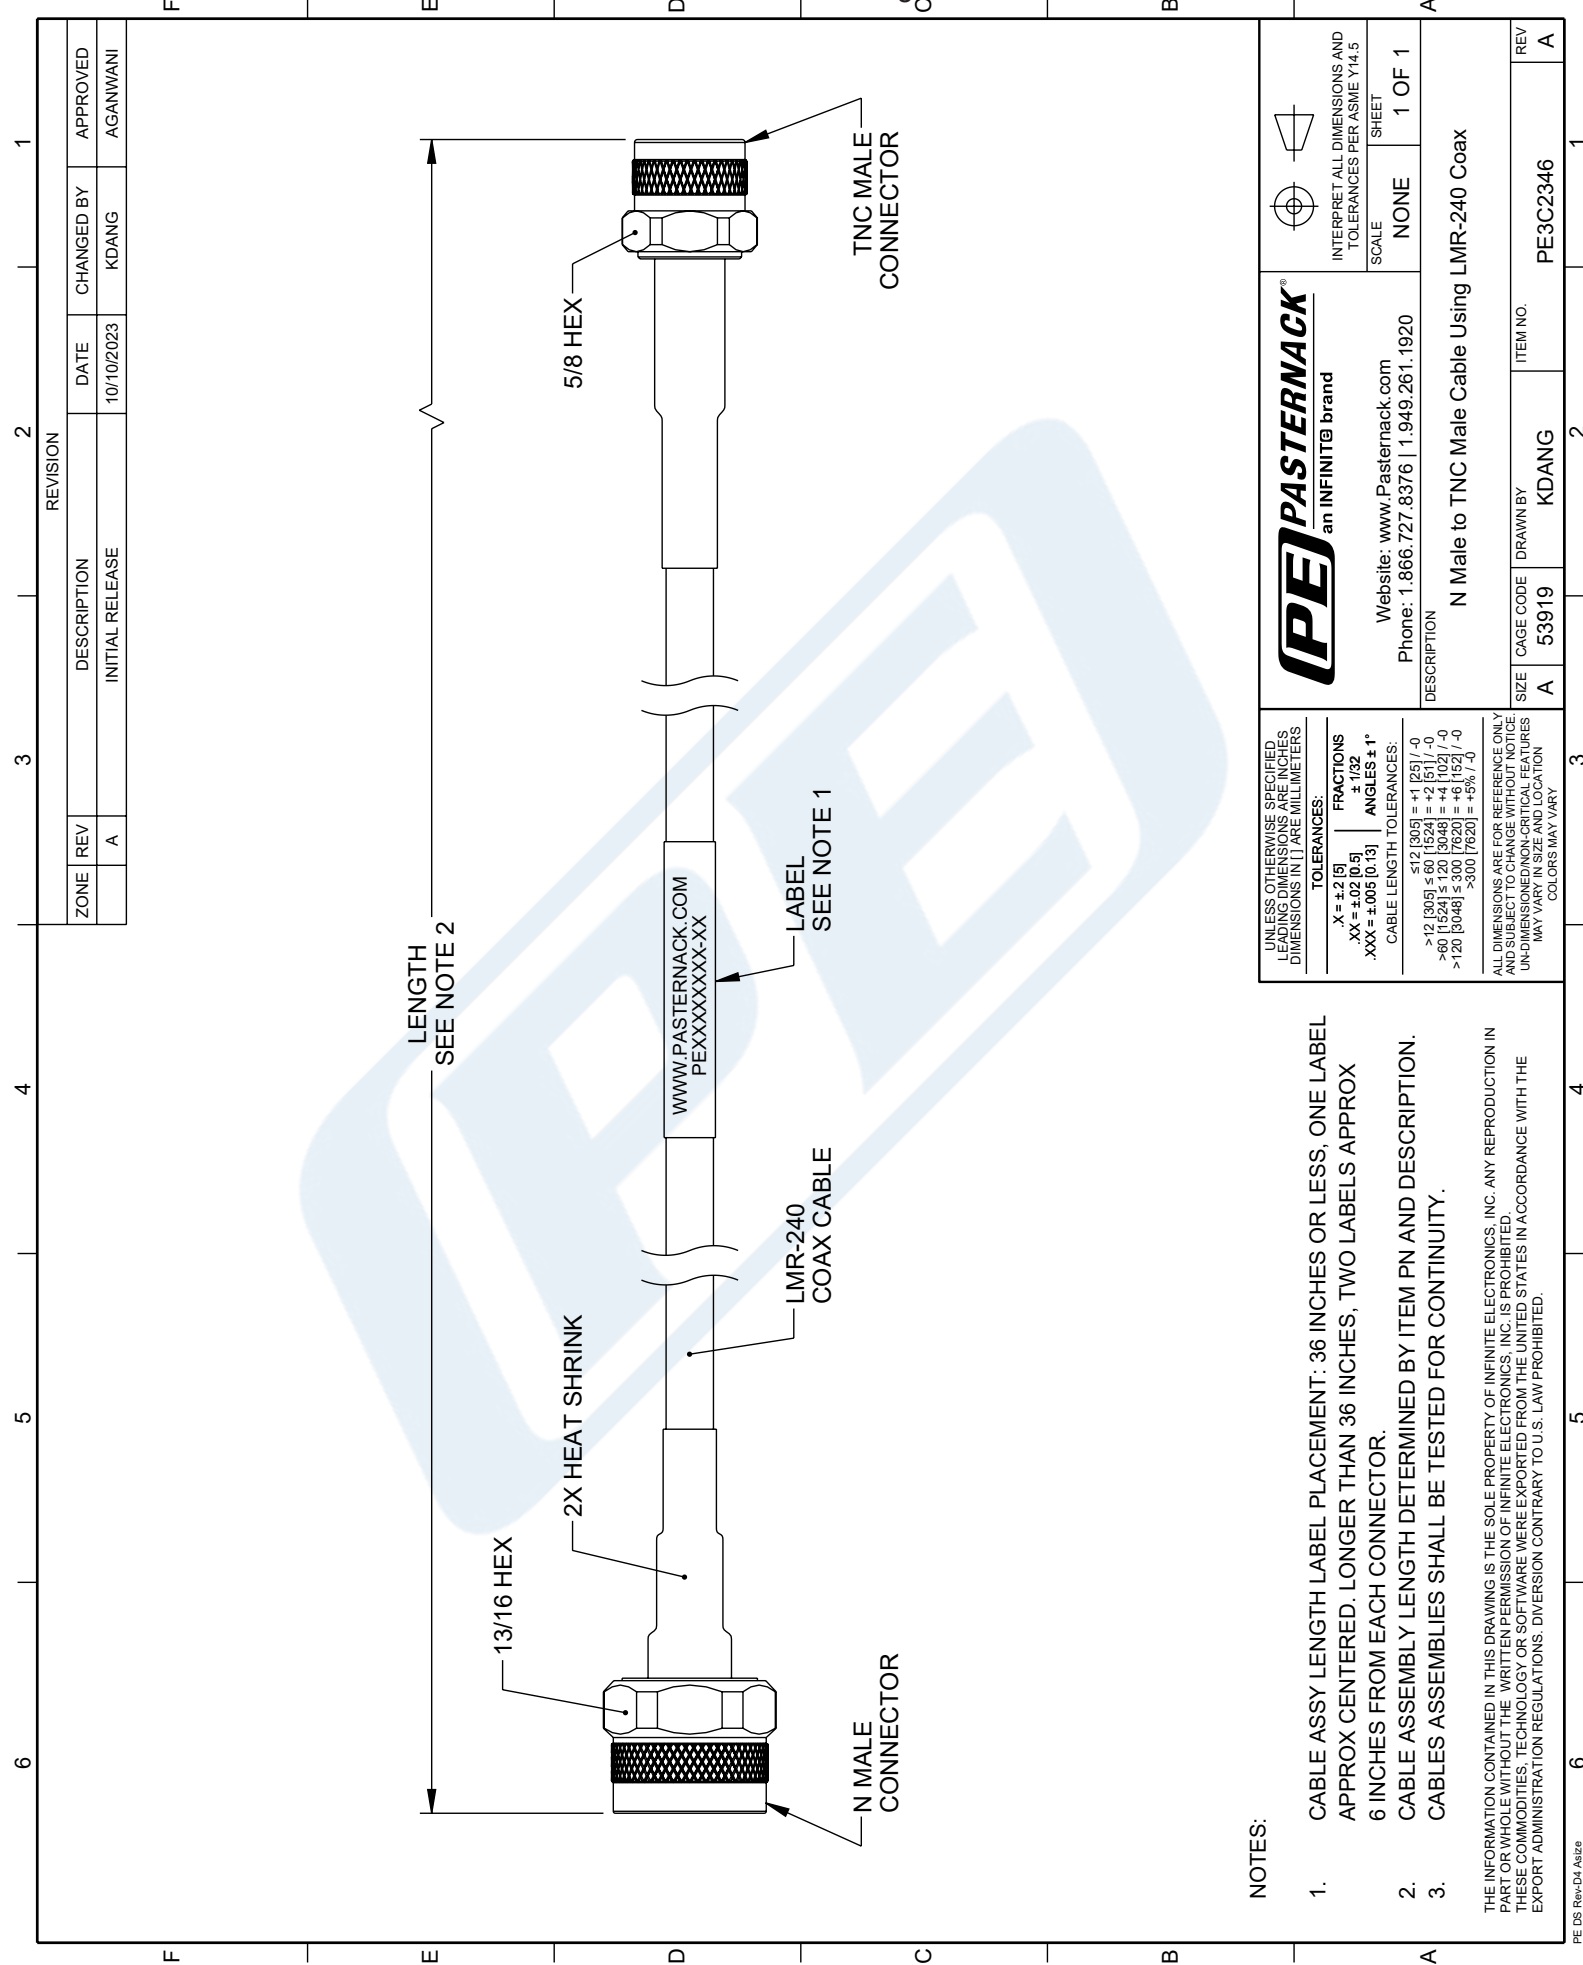

| REVISION | | | |
|----------|-----|-----------------|------------|
| ZONE | REV | DESCRIPTION | DATE |
| | A | INITIAL RELEASE | 10/10/2023 |
| | | CHANGED BY | AGANWANI |
| | | KDANG | |

| | |
|--|---|
| <p>an INFINITI® brand</p> <p>Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920</p> | <p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> |
| | <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p> |
| <p>DESCRIPTION: N Male to TNC Male Cable Using LMR-240 Coax</p> | |
| <p>UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, DIMENSIONS IN [] ARE MILLIMETERS.</p> <p>TOLERANCES: .X ± .2 [5] .XX ± .02 [0.5] .XXX ± .005 [0.13]</p> <p>FRACTIONS: ± 1/32 ANGLES ± 1°</p> <p>CABLE LENGTH TOLERANCES: ≤ 12 [305] = ± 1 [25] / -0 > 12 [305] ≤ 60 [1524] = ± 2 [51] / -0 > 60 [1524] ≤ 120 [3048] = ± 4 [102] / -0 > 120 [3048] ≤ 300 [7620] = ± 8 [93] / -0 > 300 [7620] = ± 9 [9] / -0</p> <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE AND SUBJECT TO U.S. LAW PROHIBITED. UN-DIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.</p> | |
| <p>ITEM NO. PE3C2346</p> <p>REVISION A</p> | <p>ITEM NO. PE3C2346</p> <p>REVISION A</p> |

- NOTES:**
- CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
 - CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
 - CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.