


SMB Plug to Trimmed Lead Cable Using RG405 Coax

PE3C5236



Configuration

- Connector 1: SMB Plug
- Connector 2: Trimmed Lead
- Cable Type: RG405
- Coax Flex Type: Semi-Rigid

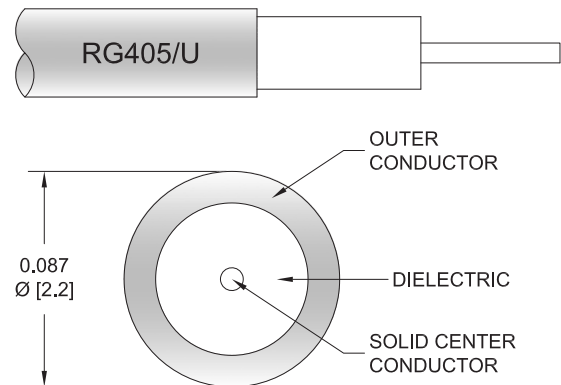

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C5236 50 ohm SMB plug to trimmed lead cable using RG405 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.019 lbs [8.62 g]

Cable

Cable Type	RG405
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Copper
Jacket Material	Tan
Repeated Minimum Bend Radius	0.05 in [1.27 mm]

SMB Plug to Trimmed Lead Cable Using RG405 Coax



PE3C5236

Connectors

Description	Connector 1	Connector 2
Type	SMB Plug	Trimmed Lead
Impedance	50 Ohms	0 Ohms
Configuration	Straight	Straight
Body Material and Plating	Brass, Nickel	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

How to Order

Part Number Configuration:

PE3C5236 **- xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C5236-12 = 12 inches long cable
PE3C5236-100cm = 100 cm long cable

SMB Plug to Trimmed Lead Cable Using RG405 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to Trimmed Lead Cable Using RG405 Coax PE3C5236](#)

URL: <https://www.pasternack.com/smb-plug-to-trimmed-lead-cable-using-rg405-pe3c5236-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C5236 CAD Drawing
SMB Plug to Trimmed Lead Cable Using RG405 Coax

