

2.4mm Male to 2.4mm Male Cable Using RG405 Coax

RF Cable Assemblies Technical Data Sheet

PE3C5688

Configuration

- Connector 1: 2.4mm Male
- Connector 2: 2.4mm Male
- Cable Type: RG405

Features

- Max Frequency 40 GHz
- 500 Mating Cycles

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C5688 2.4mm male to 2.4mm male cable using RG405 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack 2.4mm to 2.4mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid RG405 coax. The PE3C5688 2.4mm male to 2.4mm male cable assembly operates to 40 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.3:1	
Dielectric Withstanding Voltage (AC)			1,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	20	30	40	GHz
VSWR (Max.)	1.21:1	1.21:1	1.26:1	1.3:1	1.3:1	
Return Loss (Max.)	20.44	20.444	18.962	17.692	17.692	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Cable Using RG405 Coax PE3C5688](#)

2.4mm Male to 2.4mm Male Cable Using RG405 Coax

RF Cable Assemblies Technical Data Sheet**PE3C5688****Mechanical Specifications****Cable Assembly**

Diameter 0.312 in [7.92 mm]

Cable

Cable Type RG405
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Outer Conductor Material and Plating Copper

Repeated Minimum Bend Radius 0.05 in [1.27 mm]

Connectors

Description	Connector 1	Connector 2
Type	2.4mm Male	2.4mm Male
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PEI	PEI
Body Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Body Plating Specification	50 µin minimum	50 µin minimum
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	ASTM-A582	ASTM-A582
Hex Size	5/16 inch	5/16 inch
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

Environmental Specifications**Temperature**

Operating Range -55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Cable Using RG405 Coax PE3C5688](#)

2.4mm Male to 2.4mm Male Cable Using RG405 Coax

RF Cable Assemblies Technical Data Sheet

PE3C5688

How to Order

Part Number Configuration:

PE3C5688

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C5688-12 = 12 inches long cable
PE3C5688-100cm = 100 cm long cable


2.4mm Male to 2.4mm Male Cable Using RG405 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Cable Using RG405 Coax PE3C5688](#)

URL: <https://www.pasternack.com/2.4mm-male-2.4mm-male-rg405u-cable-assembly-pe3c5688-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C5688 CAD Drawing
2.4mm Male to 2.4mm Male Cable Using RG405 Coax

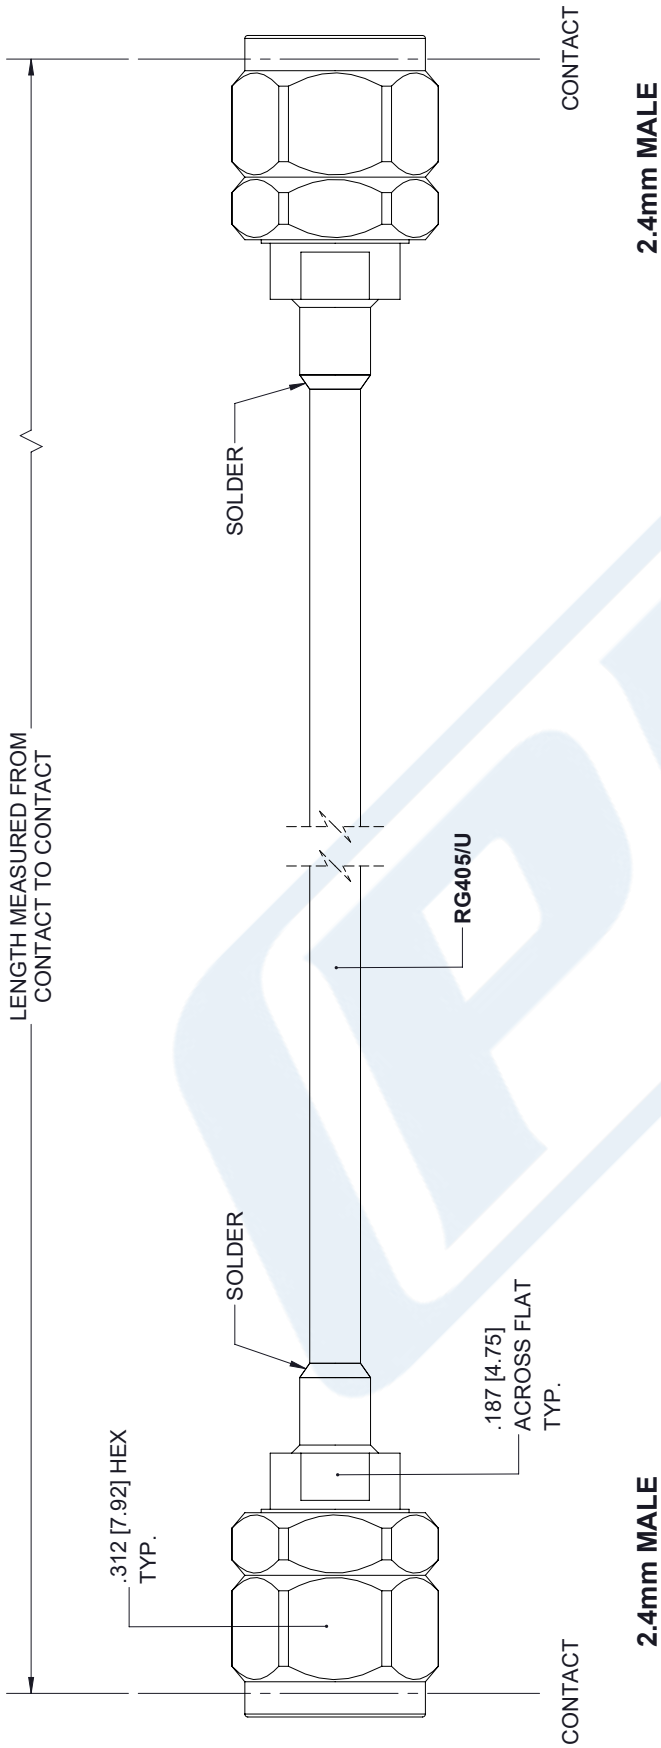

STANDARD TOLERANCES

.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE

PE3C5688

CAGE CODE 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 10/03/18

SCALE N/A

SIZE A

7361