



## 4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

PE3C8244

#### Configuration

- Connector 1: 4.3-10 Female Bulkhead
- Connector 2: 7/16 DIN Male Right Angle
- Cable Type: TFT-402

#### Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > -80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

#### Description

Pasternack's PE3C8244 4.3-10 female bulkhead to 7/16 DIN male right angle cable using TFT-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 4.3-10 to 7/16 DIN cable assembly has a female to male gender configuration with 50 ohm flexible TFT-402 coax. The PE3C8244 4.3-10 female to 7/16 DIN male cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The right angle 7/16 DIN interface on the TFT-402 cable allows for easier connections in tight spaces. Our RF cable assembly with 4.3-10 bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than -80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8244](#)



## 4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

PE3C8244

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	-80			dB
Passive Intermodulation			-160	dBc
Capacitance		26.7 [87.6]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.5 [27.89]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		5.6 [18.37]		Ω/1000ft [Ω/Km]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.052	0.076	0.108	0.173	0.267	dB/ft
	0.17	0.25	0.35	0.57	0.88	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as  $0.1 \cdot \sqrt{F(\text{GHz})}$  dB for the straight connector and 0.12 dB for the right angle connector.

#### Mechanical Specifications

##### Cable Assembly

Diameter 1.25 in [31.75 mm]

##### Cable

Cable Type TFT-402  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 2  
 Shield Layer 1 Silver Plated Copper Braid  
 Shield Layer 2 Tinned Copper Braid  
 Jacket Material FEP, Blue  
 Jacket Diameter 0.16 in [4.06 mm]

One Time Minimum Bend Radius 0.75 in [19.05 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8244](#)



## 4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

PE3C8244

#### Connectors

Description	Connector 1	Connector 2
Type	4.3-10 Female Bulkhead	7/16 DIN Male Right Angle
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Phosphor Bronze, Silver	Brass, Silver
Contact Plating Specification	200 µin	200 µin
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Tri-Metal	
Outer Conductor Plating Specification	80 µin	
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 µin	100 µin
Coupling Nut Material and Plating		Brass, Tri-Metal
Coupling Nut Plating Specification		100 µin
Torque		22.083 ft-lbs [29.95 Nm]

#### Environmental Specifications

##### Temperature

Operating Range

-55 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8244](#)



## 4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

PE3C8244

#### How to Order

Part Number Configuration:

**PE3C8244**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C8244-12 = 12 inches long cable  
PE3C8244-100cm = 100 cm long cable

4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8244](#)


URL: <https://www.pasternack.com/4.3-10-female-7-16-din-male-tft-402-cable-assembly-pe3c8244-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C8244 CAD Drawing

4.3-10 Female Bulkhead to 7/16 DIN Male Right Angle Low PIM Cable  
Using TFT-402 Coax Using Times Microwave Components

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/04/2021	AGANWANI

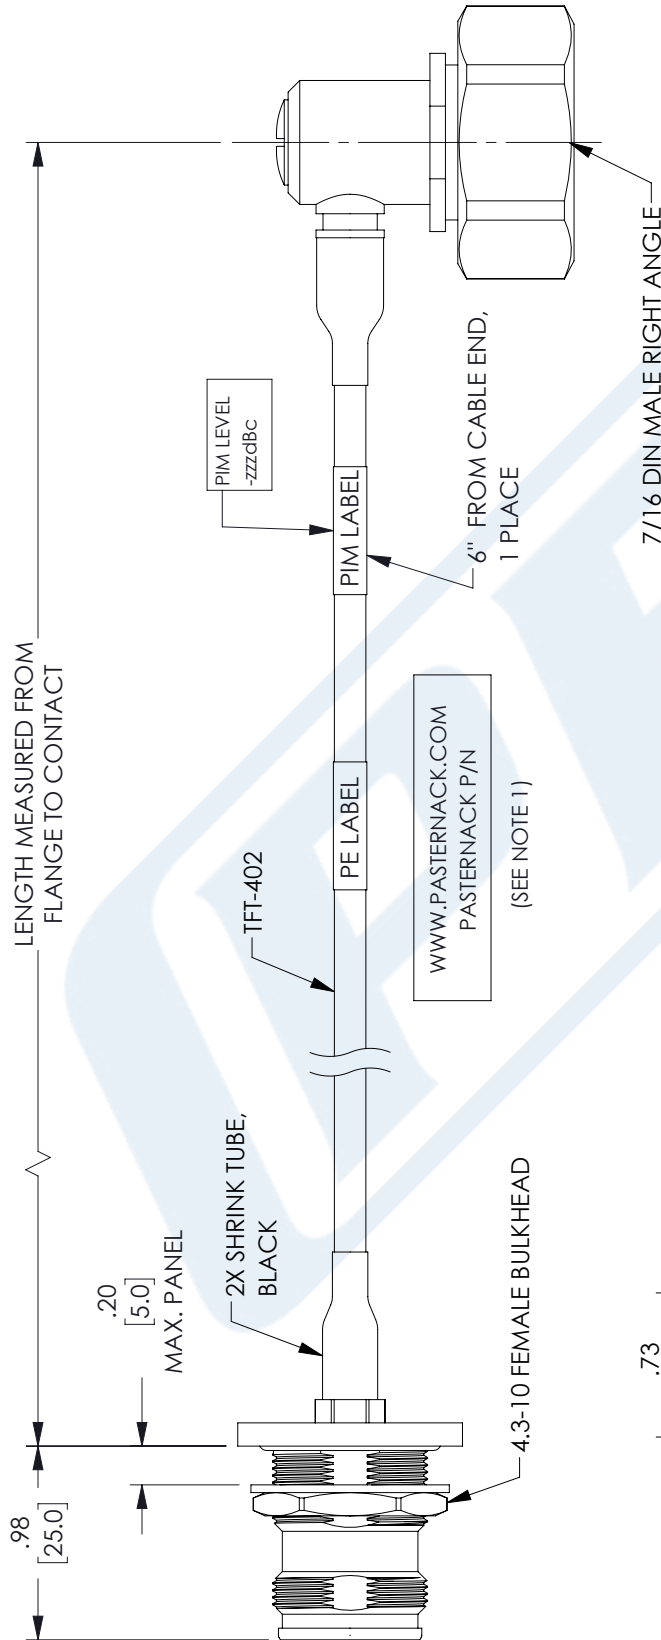

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

	FRACTIONS	ANGLES
.X = ± .2	[.08]	± 1/32
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	± .1 [25] / -0
12 [305] < L ≤ 60 [1524]	± .2 [51] / -0
60 [1524] < L ≤ 120 [3048]	± .4 [102] / -0
120 [3048] < L ≤ 300 [7620]	± .6 [152] / -0
300 [7620] < L	± .5% L / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**THIRD-ANGLE PROJECTION**

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

**PASTERNAK**  
an INFINITI® brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

SIZE A CAGE CODE 53919 DRAWN BY MVEERAPPAN ITEM NO. PE3C8244 REV A

## NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED.  
CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END  
12.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE  
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.