

## 1.85mm Male to 1.85mm Female Precision Cable Using High Flex VNA Test Coax



### PE3TC0900

#### Configuration

- Connector 1: 1.85mm Male
- Connector 2: 1.85mm Female
- Cable Type: PE-VNA-HF
- Coax Flex Type: Flexible

#### Features

- Max Frequency 70 GHz
- Shielding Effectivity > 100 dB
- 78% Phase Velocity
- Triple Shielded
- Designed for use as VNA test port extenders
- Highly flexible armored cable construction
- Excellent amplitude and phase stability with flexure
- Non-conductive protective Nomex outer sleeve
- Each serialized assembly comes with test data
- In-stock and ready to ship same-day

#### Applications

- General Purpose
- Laboratory Use
- Vector Network analyzer test port extenders
- Semiconductor probe testing
- Precise bench-top testing
- Lab and production testing

#### Description

Pasternack high performance high flex VNA test cables are designed to provide customers repeatable and accurate VNA measurements. These Test cables have excellent electrical properties including low Insertion Loss, low VSWR and phase stability of +/- 8° with flexure. The braided stainless steel armoring provides a rugged, but flexible cable with a life exceeding 100,000 flex cycles. The rugged connectors provide up to 5,000 mating cycles when attached with proper care. The flexibility of these cables makes it easier and safer to test your Device Under Test (DUT). When used with the appropriate calibration kit, these test cables effectively extend the test port of the VNA allowing for accurate measurements of devices that cannot be directly connected to a network analyzer test port.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		70	GHz
VSWR			1.4:1	
Velocity of Propagation		78		%
RF Shielding	100			dB
Group Delay		1.34 [4.4]		ns/ft [ns/m]
Capacitance		25.9 [84.97]		pF/ft [pF/m]
Input Power (Average)			18	Watts

## 1.85mm Male to 1.85mm Female Precision Cable Using High Flex VNA Test Coax



### PE3TC0900

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Phase Stability with Flexure		8		Degrees

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	5	10	20	40	70	GHz
Insertion Loss (Max.)	0.48	0.68	1	1.45	1.95	dB/ft
	1.57	2.23	3.28	4.76	6.4	
Power Handling (Max.)					18	Watts

Electrical Specification Notes:  
Values at 25°C, sea level.

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter 0 in [0 mm]  
Weight 0.101 lbs [45.81 g]

##### Cable

Cable Type PE-VNA-HF  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper, Silver  
Dielectric Type PTFE  
Number of Shields 3  
Shield Layer 1 Silver Plated Copper Tape  
Shield Layer 2 Silver Plated Copper Braid  
Shield Layer 3 Silver Plated Copper Braid  
Jacket Diameter 0.27 in [6.86 mm]  
One Time Minimum Bend Radius 1 in [25.4 mm]  
Flat Plate Crush 317 lbs/in [5.66 Kg/mm]

## 1.85mm Male to 1.85mm Female Precision Cable Using High Flex VNA Test Coax



### PE3TC0900

#### Connectors

Description	Connector 1	Connector 2
Type	1.85mm Male	1.85mm Female
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	ULTEM	ULTEM
Outer Conductor Material and Plating		Passivated Stainless Steel
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Material and Plating	Passivated Stainless Steel	
Torque	8 in-lbs 0.9 Nm	

#### Environmental Specifications

Operating Range Temperature -65 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data


Notes:  
Values at 25°C, sea level.

1.85mm Male to 1.85mm Female Precision Cable Using High Flex VNA Test Coax

**PE3TC0900**




Typical Performance Data

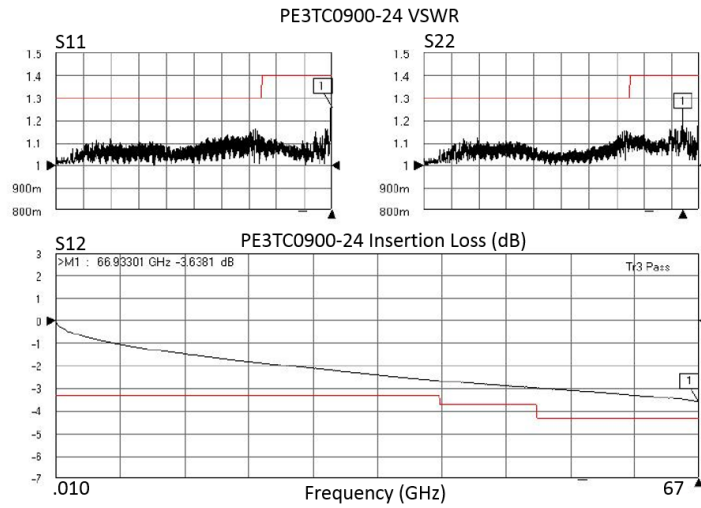



# PE3TC0900 CAD Drawing

1.85mm Male to 1.85mm Female Precision Cable Using High Flex VNA Test Coax

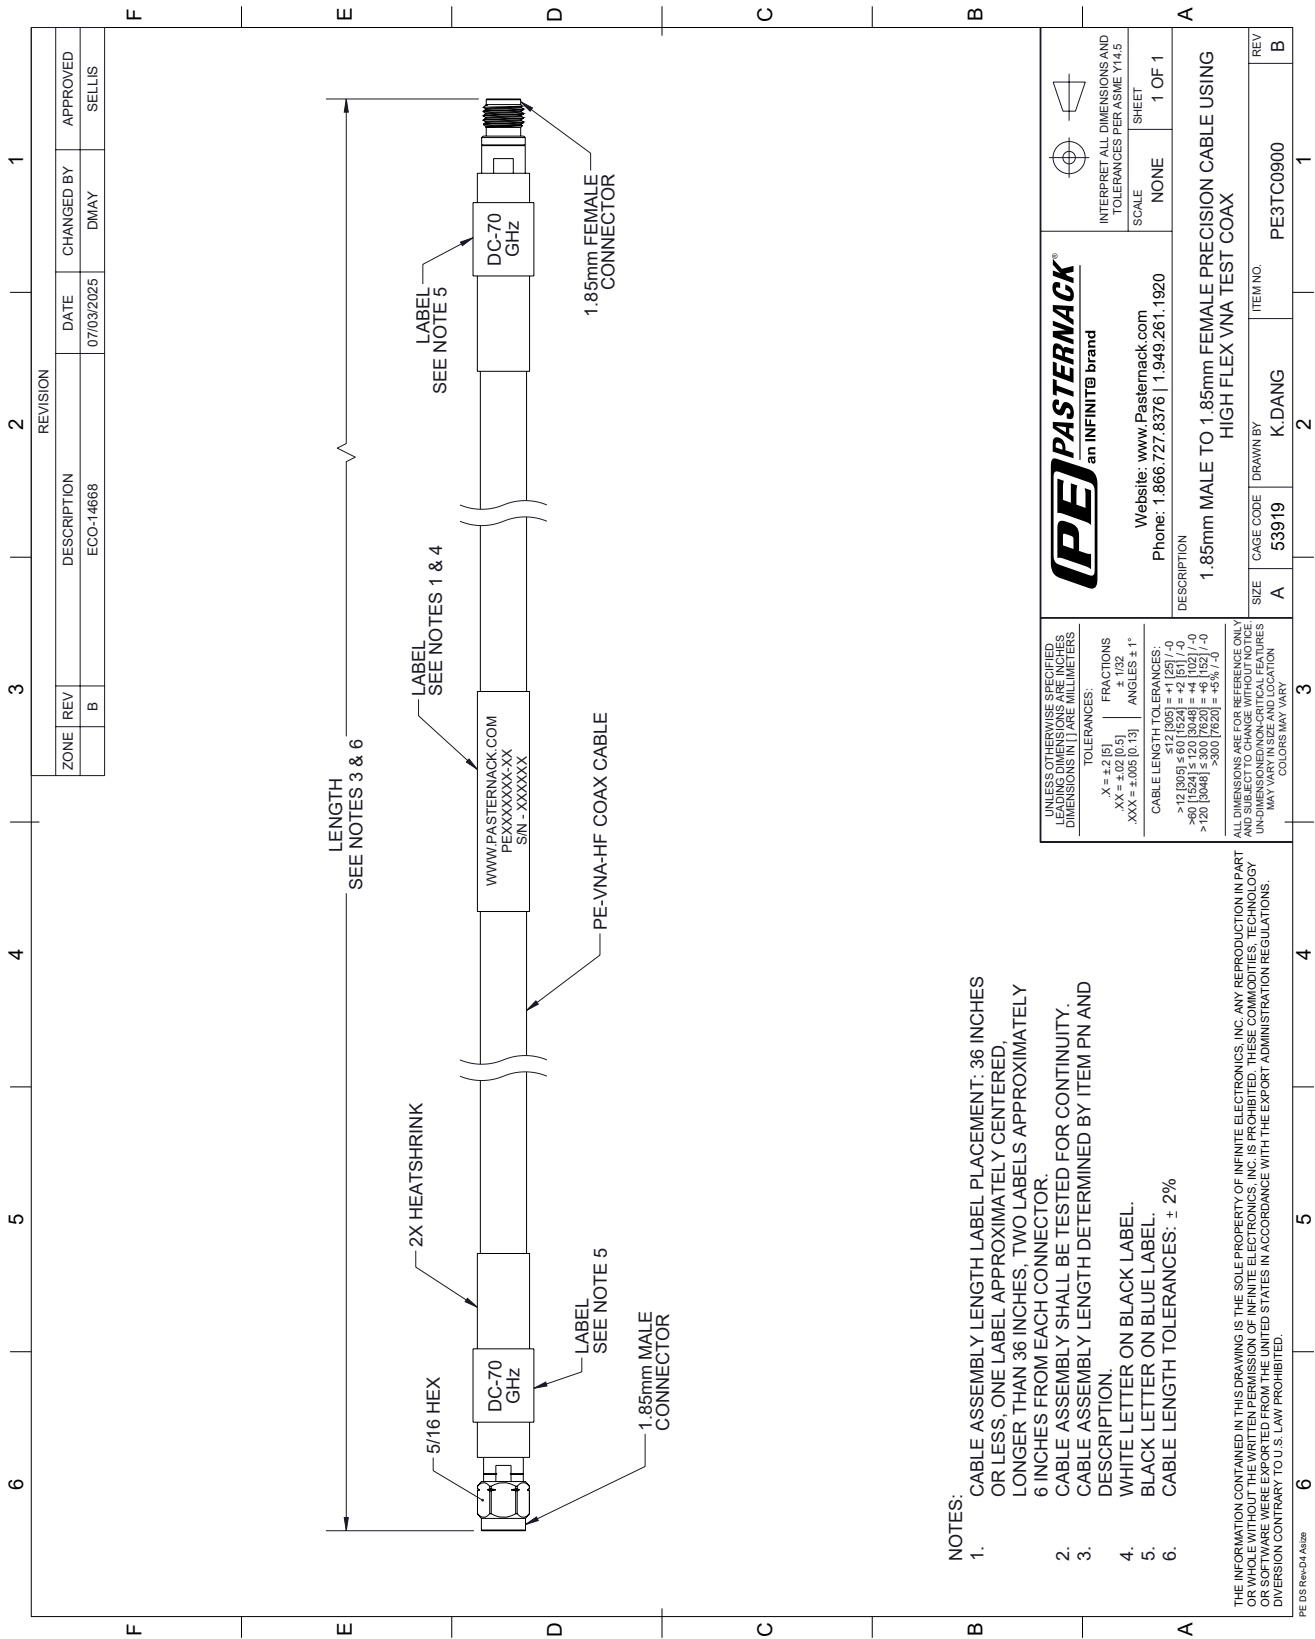

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE LENGTH SHALL BE DETERMINED BY ITEM PN AND DESCRIPTION.
4. WHITE LETTER ON BLACK LABEL.
5. BLACK LETTER ON BLUE LABEL.
6. CABLE LENGTH TOLERANCES: ± 2%

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS IN INCHES DIMENSIONS IN MILLIMETERS

TOLERANCES:

X = ± 2 [5] FRACTIONS ± 1/32 ANGLES ± 1°  
 .XX = ± 0.02 [0.5] .XXX = ± 0.005 [0.13]

CABLE LENGTH TOLERANCES:  
 >12 [305] ≤ 60 [1524] = ± 2 [51] / 0  
 >60 [1524] ≤ 300 [7620] = ± 6 [152] / 0  
 >300 [7620] = ± 6% [7.0]

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UNLESS INDICATED OTHERWISE. CRITICAL FEATURES MAY VARY. COLORS MAY VARY.

**PE PASTERNAK**  
an INFINITO brand

Website: [www.Pasternack.com](http://www.Pasternack.com)  
 Phone: 1.866.727.8376 | 1.949.261.1920

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 1

DESCRIPTION  
**1.85mm MALE TO 1.85mm FEMALE PRECISION CABLE USING HIGH FLEX VNA TEST COAX**

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	K.DANG	PE3TC0900	B