

TNC Female Bulkhead to SMA Male Right Angle Cable Using RG188 Coax




PE3W05470

Configuration

- Connector 1: TNC Female Bulkhead
- Connector 2: SMA Male Right Angle
- Cable Type: RG188
- Coax Flex Type: Flexible

Features

- Max Frequency 3 GHz
- PTFE Jacket

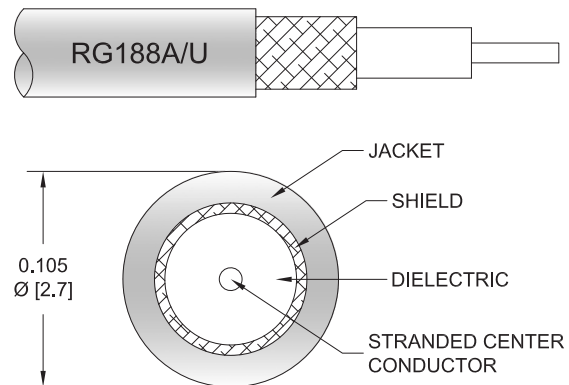

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W05470 TNC female bulkhead to SMA male right angle cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to SMA cable assembly has a female to male gender configuration with 50 ohm flexible RG188 coax. The PE3W05470 TNC female to SMA male cable assembly operates to 3 GHz. The right angle SMA interface on the RG188 cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	

Specifications by Frequency

TNC Female Bulkhead to SMA Male
Right Angle Cable Using RG188 Coax



PE3W05470

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		100	250	500	1000	
PE3W05470	Custom Lengths Available	Insertion Loss (Typ.)	0.05	0.13	0.25	0.5	1.5	dB/ft	
			0.17	0.42	0.83	1.65	4.93	dB/m	
PE3W05470-12	12 inch	Insertion Loss (Typ.)	0.35	0.43	0.55	0.8	1.8	dB	0.073
PE3W05470-24	24 inch	Insertion Loss (Typ.)	0.4	0.55	0.8	1.3	3.3	dB	0.084
PE3W05470-36	36 inch	Insertion Loss (Typ.)	0.45	0.68	1.05	1.8	4.8	dB	0.094
PE3W05470-48	48 inch	Insertion Loss (Typ.)	0.5	0.8	1.3	2.3	6.3	dB	0.104
PE3W05470-72	72 inch	Insertion Loss (Typ.)	0.6	1.05	1.8	3.3	9.3	dB	0.124

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.073 pounds
Additional Weight per Inch:	0.00084 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.073 lbs [33.11 g]

Cable

Cable Type	RG188
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.11 in [2.79 mm]

TNC Female Bulkhead to SMA Male Right Angle Cable Using RG188 Coax



PE3W05470

Connectors

Description	Connector 1	Connector 2
Type	TNC Female Bulkhead	SMA Male Right Angle
Specification	MIL-STD-348	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Phosphor Bronze, Gold	Brass, Gold
Contact Plating Specification		50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		16-May inch
Torque		3 in-lbs 0.34 Nm

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


TNC Female Bulkhead to SMA Male
Right Angle Cable Using RG188 Coax



PE3W05470

Typical Performance Data

How to Order

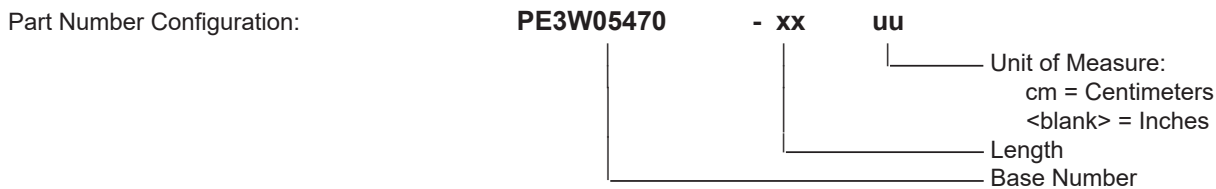

Example: PE3W05470-12 = 12 inches long cable
 PE3W05470-100cm = 100 cm long cable

TNC Female Bulkhead to SMA Male Right Angle Cable Using RG188 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to SMA Male Right Angle Cable Using RG188 Coax PE3W05470](https://www.pasternack.com/tnc-female-bulkhead-to-sma-male-right-angle-cable-using-rg188-coax-pe3w05470)

URL: <https://www.pasternack.com/tnc-female-bulkhead-to-sma-male-cable-using-rg188-pe3w05470-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W05470 CAD Drawing

TNC Female Bulkhead to SMA Male Right Angle Cable Using RG188 Coax

