



## SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET


PE3W06130/HS

#### Configuration

- Connector 1: SSMC Plug
- Connector 2: SMA Male
- Cable Type: LMR-100A
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

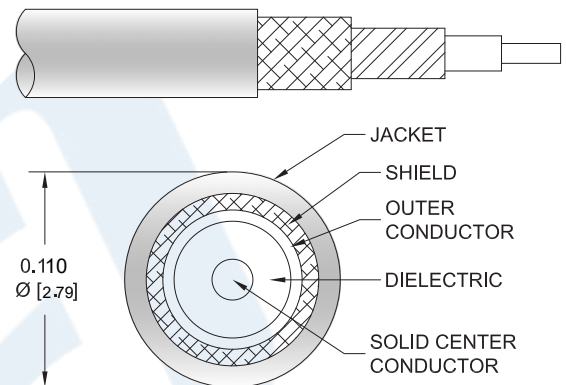

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W06130/HS SSMC plug to SMA male cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SSMC to SMA cable assembly has a plug to male gender configuration with 50 ohm flexible LMR-100A coax. The PE3W06130/HS SSMC plug to SMA male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W06130/HS](#)



## SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET

PE3W06130/HS

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		$\Omega$ /1000ft [ $\Omega$ /Km]
DC Resistance Outer Conductor		9.5 [31.17]		$\Omega$ /1000ft [ $\Omega$ /Km]
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency						
PE3W06130/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.12	0.17	0.24	0.4	0.64	dB/ft	
			0.38	0.55	0.79	1.31	2.11	dB/m	
PE3W06130/HS-24	24 inch	Insertion Loss (Typ.)	0.43	0.53	0.68	1	1.49	dB	0.033
PE3W06130/HS-36	36 inch	Insertion Loss (Typ.)	0.55	0.7	0.92	1.4	2.13	dB	0.042
PE3W06130/HS-48	48 inch	Insertion Loss (Typ.)	0.66	0.86	1.16	1.8	2.77	dB	0.051
PE3W06130/HS-100CM	100 cm	Insertion Loss (Typ.)	0.58	0.75	0.99	1.51	2.31	dB	0.045
PE3W06130/HS-200CM	200 cm	Insertion Loss (Typ.)	0.96	1.29	1.78	2.82	4.41	dB	0.075

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.024 pounds
Additional Weight per Inch:	0.00075 pounds

#### Mechanical Specifications

##### Cable Assembly

Weight 0.024 lbs [10.89 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W06130/HS](#)



## SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET

PE3W06130/HS

#### Cable

Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	SSMC Plug	SMA Male Threaded
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Beryllium Copper, Gold	Brass, Gold
Coupling Nut Material and Plating	Beryllium Copper, Gold	Brass, Gold
Hex Size	5/32 inch	5/16 in
Torque	1 in-lbs [0.11 Nm]	5 in-lbs [0.57 Nm]

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W06130/HS](#)



## SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET

PE3W06130/HS

#### How to Order

Part Number Configuration:

PE3W06130/HS - xx uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W06130/HS-12 = 12 inches long cable  
PE3W06130/HS-100cm = 100 cm long cable

SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W06130/HS](https://www.pasternack.com/ssmc-plug-to-sma-male-low-loss-cable-using-lmr-100-with-heatshrink-pe3w06130-hs-p.aspx)

URL: <https://www.pasternack.com/ssmc-plug-to-sma-male-low-loss-cable-using-lmr-100-with-heatshrink-pe3w06130-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


# PE3W06130/HS CAD Drawing

SSMC Plug to SMA Male Low Loss Cable Using LMR-100 Coax with HeatShrink

F E D C B A

1 2 3 4 5 6

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	09/27/2023	HBAKKE	AGANWANI

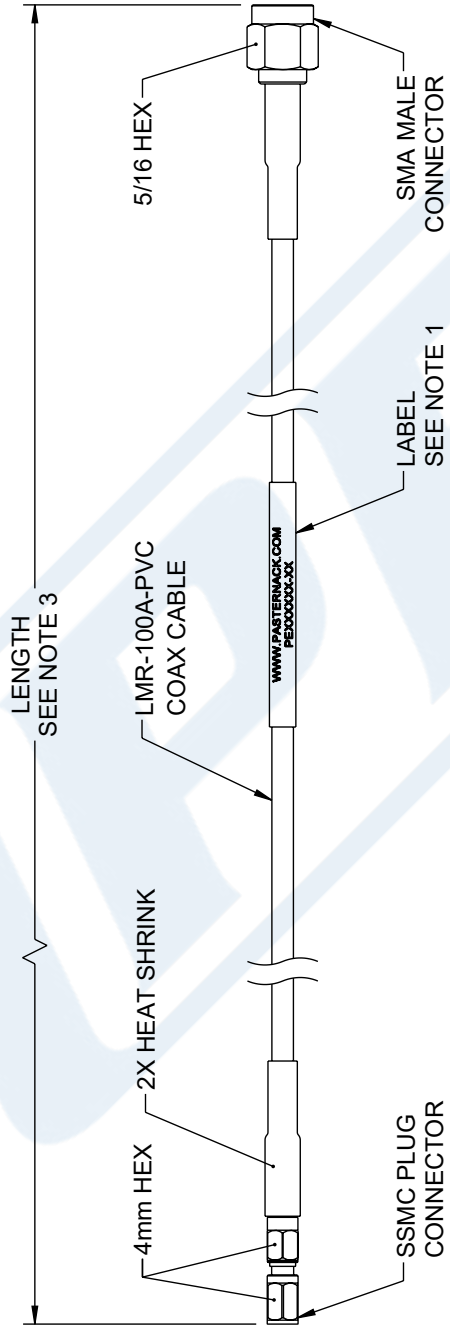

- NOTES:**
- CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
  - CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1
	Website: www.Pasternack.com Phone: 1.866.727.8376   1.949.261.1920
DESCRIPTION <b>SSMC PLUG TO SMA MALE LOW LOSS CABLE USING LMR-100 COAX WITH HEATSHRINK</b>	
SIZE: A CAGE CODE: 53919 DRAWN BY: HBAKKE	ITEM NO.: PE3W06130/HS REV: A

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS.

TOLERANCES:	FRACTIONS
.X = ±.2 [5]	± 1/32
.XX = ±.02 [0.5]	± 1/64
.XXX = ±.005 [0.13]	± .005

CABLE LENGTH TOLERANCES:

<12 [305]	±.1 [2.5]
>12 [305] ≤ 60 [1524]	±.2 [5.1]
>60 [1524] ≤ 120 [3048]	±.4 [10.2]
>120 [3048] ≤ 300 [7620]	±.6 [15.2]
>300 [7620]	±.8 [20.3]

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE NON-CRITICAL FEATURES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.