

## SMA Male Right Angle to SMA Male Cable Using PE-SR402FLJ Coax with HeatShrink




### PE3W08827/HS

#### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male
- Cable Type: PE-SR402FLJ
- Coax Flex Type: Formable

#### Features

- Max Frequency 12.4 GHz
- Shielding Effectivity > 100 dB
- 70% Phase Velocity
- FEP Jacket

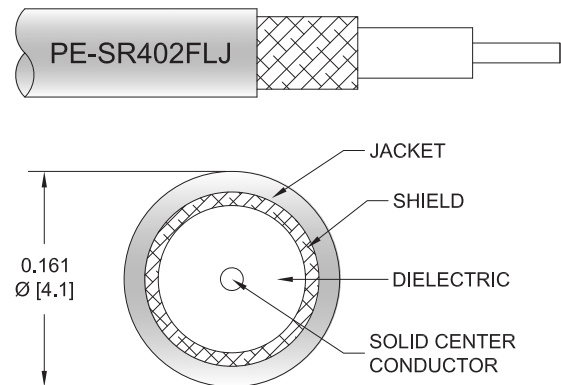

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W08827/HS SMA male right angle to SMA male cable using PE-SR402FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR402FLJ coax. The PE3W08827/HS SMA male to SMA male cable assembly operates to 12.4 GHz. The right angle SMA interface on the PE-SR402FLJ cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.23 [27]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			500	Vrms

#### Specifications by Frequency

SMA Male Right Angle to SMA Male Cable Using  
PE-SR402FLJ Coax with HeatShrink



**PE3W08827/HS**

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	500	1000	2500	5000	12400	
PE3W08827/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.082	0.125	0.198	0.32	0.542	dB/ft	
			0.27	0.42	0.65	1.05	1.78	dB/m	
PE3W08827/HS-6	6 In	Insertion Loss (Typ.)	0.35	0.37	0.4	0.46	0.58	dB	0.037
PE3W08827/HS-9	9 In	Insertion Loss (Typ.)	0.37	0.4	0.45	0.54	0.71	dB	0.044
PE3W08827/HS-12	12 In	Insertion Loss (Typ.)	0.39	0.43	0.5	0.62	0.85	dB	0.051
PE3W08827/HS-18	18 In	Insertion Loss (Typ.)	0.43	0.49	0.6	0.78	1.12	dB	0.066
PE3W08827/HS-24	24 In	Insertion Loss (Typ.)	0.47	0.55	0.7	0.94	1.39	dB	0.081

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.051 pounds
Additional Weight per Inch:	0.00242 pounds

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter	0.5 in [12.7 mm]
Weight	0.022 lbs [9.98 g]

**Cable**

Cable Type	PE-SR402FLJ
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Outer Conductor 1 Material and Plating	Tinned Copper Braid
Jacket Material	FEP, Black
Jacket Diameter	0.161 in [4.09 mm]
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.575 in [40.01 mm]

SMA Male Right Angle to SMA Male Cable Using PE-SR402FLJ Coax with HeatShrink



**PE3W08827/HS**

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Mating Cycles		500
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	50 µin minimum	
Dielectric Type	PTFE	
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	30 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	5/16 inch	5/16 inch
Torque	3 in-lbs 0.34 Nm	3 in-lbs 0.34 Nm
Seal Gasket Material		Silicone

**Environmental Specifications**

Operating Range Temperature -65 to +150 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

## SMA Male Right Angle to SMA Male Cable Using PE-SR402FLJ Coax with HeatShrink



### PE3W08827/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3W08827/HS**

- **xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3W08827/HS-12 = 12 inches long cable  
PE3W08827/HS-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Cable Using PE-SR402FLJ Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Cable Using PE-SR402FLJ Coax with HeatShrink PE3W08827/HS](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-sma-male-cable-using-pe-sr402flj-with-heatshrink-pe3w08827-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3W08827/HS CAD Drawing

SMA Male Right Angle to SMA Male Cable Using PE-SR402FLJ Coax with HeatShrink

