



## TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink

### RF Cable Assemblies Technical Data Sheet


**PE3W09436/HS**

#### Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: N Female
- Cable Type: LMR-400-UF

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket

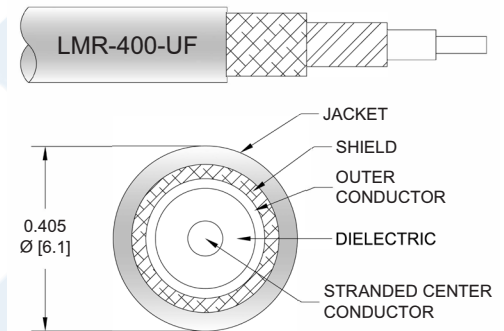

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W09436/HS TNC male right angle to type N female cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3W09436/HS TNC male to type N female cable assembly operates to 5.8 GHz. The right angle TNC interface on the LMR-400-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink PE3W09436/HS](#)



# TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink

## RF Cable Assemblies Technical Data Sheet

**PE3W09436/HS**

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.07 [3.51]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			500	Vrms
Jacket Spark			8,000	Vrms

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.023	0.035	0.05	0.081	0.13	dB/ft
	0.08	0.11	0.16	0.27	0.43	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.05xSQRT(fGHz) dB for the right angle connector and 0.1 dB for the straight connector.

### Mechanical Specifications

#### Cable Assembly

Weight 0.284 lbs [128.82 g]

#### Cable

Cable Type LMR-400-UF  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PE (F)  
 Number of Shields 2  
 Shield Layer 1 Aluminum Tape  
 Shield Layer 2 Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink PE3W09436/HS](#)



TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W09436/HS**

Jacket Material	TPE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.38 lbs-ft [0.52 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

**Connectors**

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	N Female
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Silver	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Silver	Brass, Tri-Metal

**Environmental Specifications**

**Temperature**

Operating Range -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink PE3W09436/HS](#)



TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W09436/HS**

**How to Order**

Part Number Configuration:

**PE3W09436/HS - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W09436/HS-12 = 12 inches long cable  
PE3W09436/HS-100cm = 100 cm long cable

TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink PE3W09436/HS](#)

URL: <https://www.pasternack.com/tnc-male-right-angle-to-n-female-low-loss-cable-using-lmr-400-uf-with-heatshrink-pe3w09436-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W09436/HS CAD Drawing

TNC Male Right Angle to N Female Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components with HeatShrink

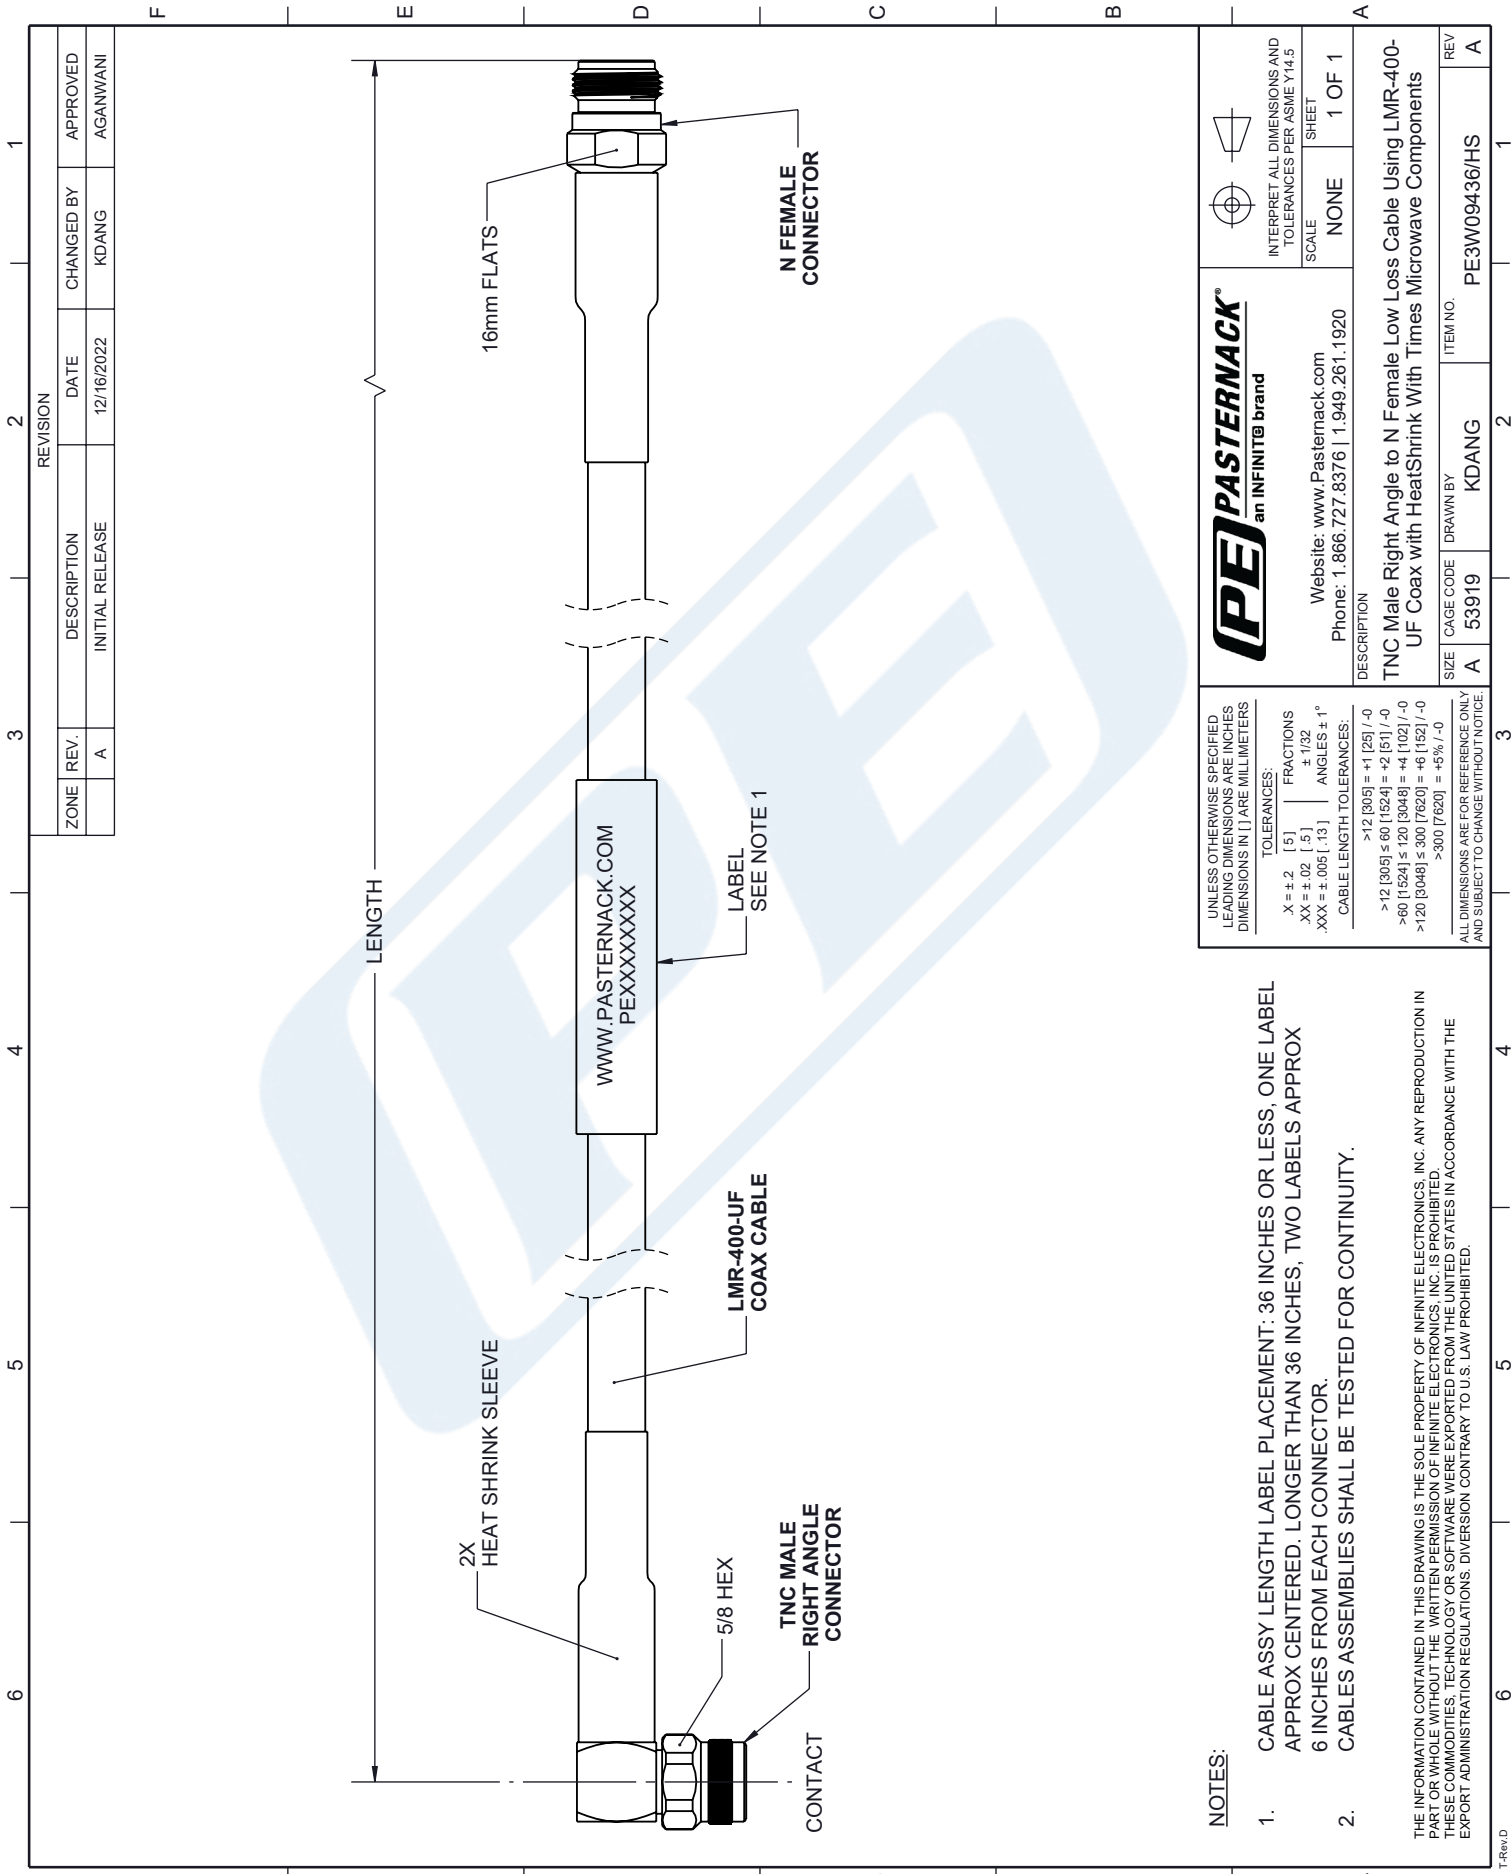

**NOTES:**

- CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
- CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.