



7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax

RF Cable Assemblies Technical Data Sheet

PE3W10730

Configuration

- Connector 1: 7/16 DIN Male Right Angle
- Connector 2: 7/16 DIN Male Right Angle
- Cable Type: RG303

Features

- Max Frequency 3 GHz
- FEP Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W10730 7/16 DIN male right angle to 7/16 DIN male right angle cable using RG303 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 7/16 DIN to 7/16 DIN cable assembly has a male to male gender configuration with 50 ohm flexible RG303 coax. The PE3W10730 7/16 DIN male to 7/16 DIN male cable assembly operates to 3 GHz. The right angle 7/16 DIN interfaces on the RG303 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	400					MHz
Insertion Loss (Typ.)	0.086					dB/ft
	0.28					dB/m

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax PE3W10730](#)



7/16 DIN Male Right Angle to 7/16 DIN Male
Right Angle Cable Using RG303 Coax

RF Cable Assemblies Technical Data Sheet

PE3W10730

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight	0.599 lbs [271.7 g]
Cable	
Cable Type	RG303
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.17 in [4.32 mm]

Connectors

Description	Connector 1	Connector 2
Type	7/16 DIN Male Right Angle	7/16 DIN Male Right Angle
Specification	IEC 169-4	IEC 169-4
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Hex Size	32 mm	32 mm

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax PE3W10730](#)



7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax

RF Cable Assemblies Technical Data Sheet

PE3W10730

How to Order

Part Number Configuration:

PE3W10730

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W10730-12 = 12 inches long cable
PE3W10730-100cm = 100 cm long cable


7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax PE3W10730](https://www.pasternack.com/7-16-din-male-right-angle-to-7-16-din-male-right-angle-cable-using-rg303-pe3w10730-p.aspx)

URL: <https://www.pasternack.com/7-16-din-male-right-angle-to-7-16-din-male-cable-using-rg303-pe3w10730-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W10730 CAD Drawing
7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax

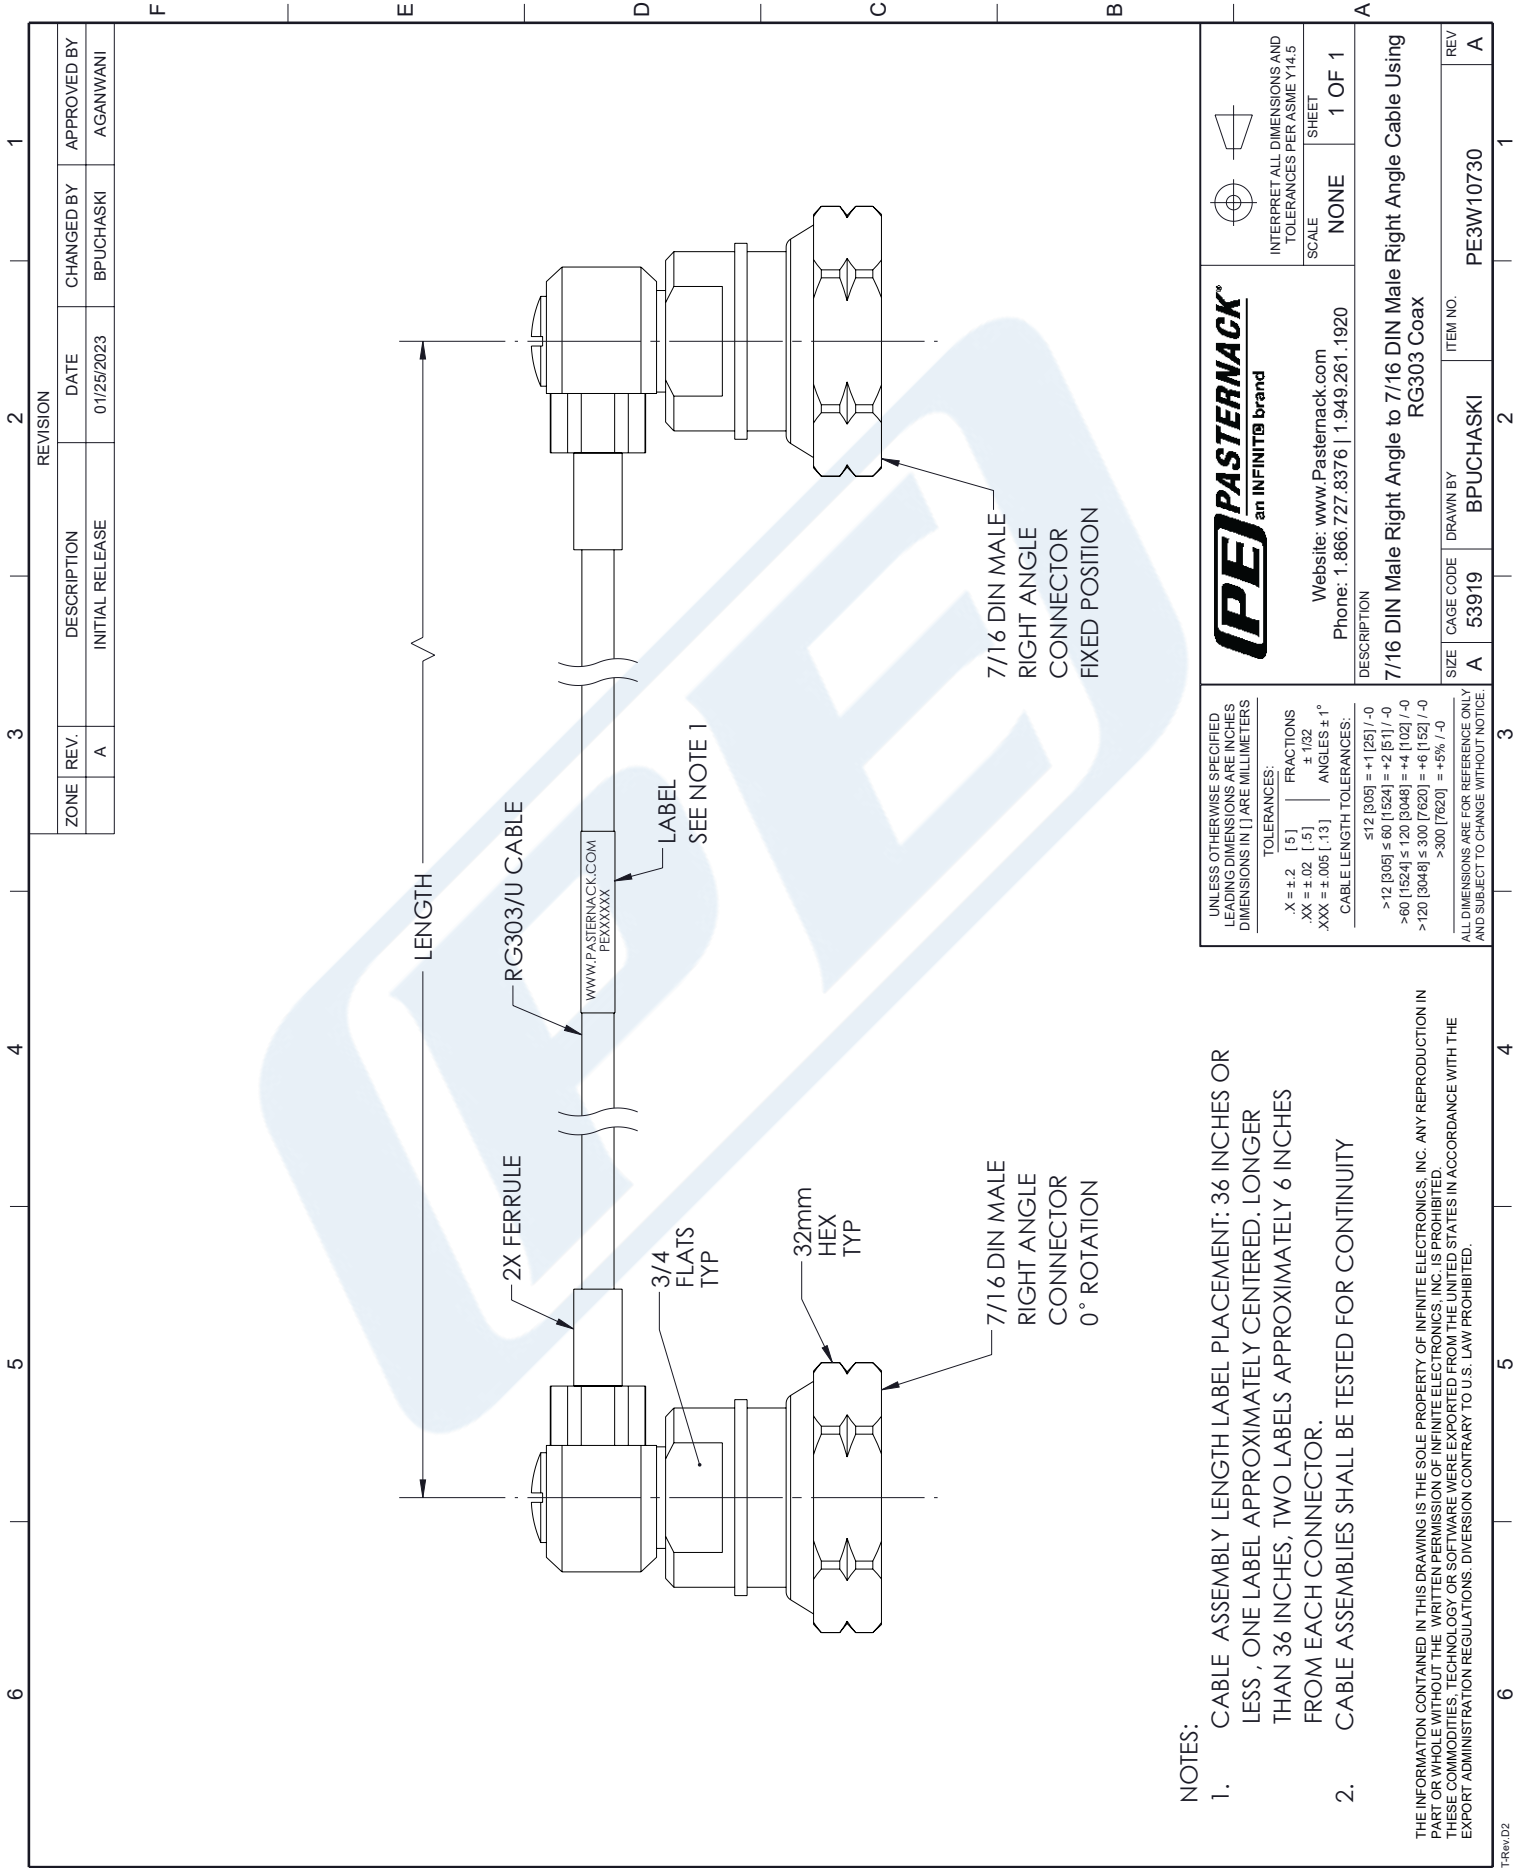

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		PE PASTERNAK an INFINITI [®] brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		SCALE NONE	
X = ±.2 [.5] FRACTIONS .XX = ±.02 [.13] ANGLES ± 1°		DESCRIPTION 7/16 DIN Male Right Angle to 7/16 DIN Male Right Angle Cable Using RG303 Coax		SHEET 1 OF 1	
CABLE LENGTH TOLERANCES:		SIZE A		REV A	
≤12 [305] = ±.1 [25] / -0		DRAWN BY BPUCHASKI		ITEM NO. PE3W10730	
>12 [305] ≤ 60 [1524] = ±.2 [5] / -0		CAGE CODE 53919		1	
>60 [1524] ≤ 120 [3048] = ±.4 [102] / -0		CABLE LENGTH TOLERANCES:			
>120 [3048] ≤ 300 [7620] = ±.6 [152] / -0		ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.			
>300 [7620] = ±.5% / -0					