

QMA Male Right Angle to Reverse Polarity SMA Female Low Loss Cable Using LMR-195-UF Coax with HeatShrink



PE3W13007/HS

Configuration

- Connector 1: QMA Male Right Angle
- Connector 2: SMA Female Reverse Polarity
- Cable Type: LMR-195-UF
- Coax Flex Type: Flexible

Features

- Shielding Effectivity > 90 dB
- 74% Phase Velocity
- Double Shielded
- TPE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W13007/HS QMA male right angle to reverse polarity SMA female cable using LMR-195-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack QMA to reverse polarity SMA cable assembly has a male to female gender configuration with 50 ohm flexible LMR-195-UF coax. The right angle QMA interface on the LMR-195-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		74		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		9.5 [31.17]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ohms/1000ft [Ohms/Km]
Jacket Spark			3,000	Vrms

Electrical Specification Notes:
Values at 25°C, sea level.

QMA Male Right Angle to Reverse Polarity SMA Female
Low Loss Cable Using LMR-195-UF Coax with HeatShrink



PE3W13007/HS

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.031 lbs [14.06 g]

Cable

Cable Type	LMR-195-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	Foam PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper
Jacket Material	TPE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Connectors

Description	Connector 1	Connector 2
Type	QMA Male Right Angle	SMA Female Reverse Polarity
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Gold
Contact Plating Specification		MIL-G-45204
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Phosphor Bronze, Tri-Metal	
Body Material and Plating	Brass, Tri-Metal	Brass, Nickel
Body Plating Specification		QQ-N-290

Environmental Specifications

Operating Range Temperature	-40 to +85 deg C
-----------------------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:
Values at 25°C, sea level.


QMA Male Right Angle to Reverse Polarity SMA Female
Low Loss Cable Using LMR-195-UF Coax with HeatShrink



PE3W13007/HS

Typical Performance Data

How to Order

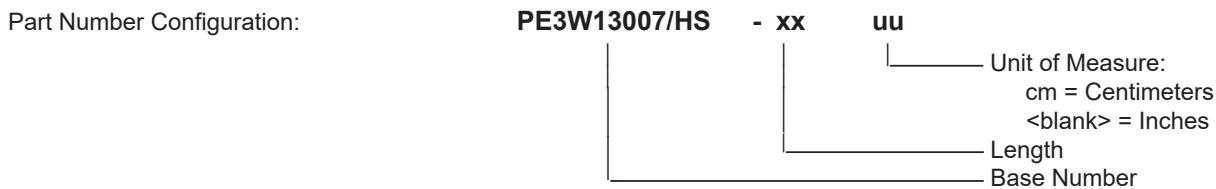

Example: PE3W13007/HS-12 = 12 inches long cable
PE3W13007/HS-100cm = 100 cm long cable

QMA Male Right Angle to Reverse Polarity SMA Female Low Loss Cable Using LMR-195-UF Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male Right Angle to Reverse Polarity SMA Female Low Loss Cable Using LMR-195-UF Coax with HeatShrink PE3W13007/HS](https://www.pasternack.com/qma-male-right-angle-to-reverse-polarity-sma-female-low-loss-cable-using-lmr-195-uf-coax-with-heatshrink-pe3w13007-hs)

URL: <https://www.pasternack.com/qma-male-right-angle-to-reverse-polarity-sma-female-low-loss-cable-using-lmr-195-uf-with-heatshrink-pe3w13007-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W13007/HS CAD Drawing

QMA Male Right Angle to Reverse Polarity SMA Female Low Loss Cable Using LMR-195-UF Coax with HeatShrink

