



TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder

RF Cable Assemblies Technical Data Sheet


PE3W13774LF

Configuration

- Connector 1: TNC Female 4 Hole Flange
- Connector 2: SMB Jack
- Cable Type: RG316-DS

Features

- Max Frequency 2 GHz
- Shielding Effectivity > 85 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

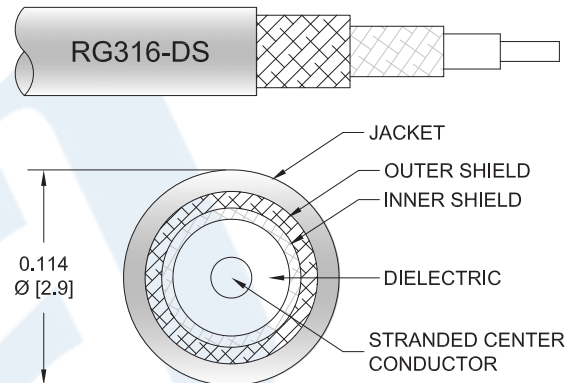

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W13774LF TNC female 4 hole flange to SMB jack cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to SMB cable assembly has a female to jack gender configuration with 50 ohm flexible RG316-DS coax. The PE3W13774LF TNC female to SMB jack cable assembly operates to 2 GHz. Our RF cable assembly with TNC 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 85 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder PE3W-13774LF](#)



TNC Female 4 Hole Flange to SMB Jack Cable
Using RG316-DS Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W13774LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	85			dB
Capacitance		28.96 [95.01]		pF/ft [pF/m]
DC Resistance Inner Conductor		83.82 [275]		Ω /1000ft [Ω /Km]
DC Resistance Outer Conductor		5.33 [17.49]		Ω /1000ft [Ω /Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	2		GHz
Insertion Loss (Typ.)	0.082	0.128	0.209	0.45		dB/ft
	0.27	0.42	0.69	1.48		dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.064 lbs [29.03 g]

Cable

Cable Type RG316-DS
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.114 in [2.9 mm]

One Time Minimum Bend Radius 0.59 in [14.99 mm]
 Repeated Minimum Bend Radius 1.57 in [39.88 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder PE3W-13774LF](#)



TNC Female 4 Hole Flange to SMB Jack Cable
Using RG316-DS Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W13774LF

Connectors

Description	Connector 1	Connector 2
Type	TNC Female 4 Hole Flange	SMB Jack
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification		30 μ in. Min
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100 μ in. Minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder PE3W-13774LF](#)



TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W13774LF

How to Order

Part Number Configuration:

PE3W13774LF - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W13774LF-12 = 12 inches long cable
PE3W13774LF-100cm = 100 cm long cable

TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder PE3W13774LF](https://www.pasternack.com/tnc-female-4-hole-flange-to-smb-jack-cable-using-rg316-ds-coax-lf-solder-pe3w13774lf-p.aspx)

URL: <https://www.pasternack.com/tnc-female-4-hole-flange-to-smb-jack-cable-using-rg316-ds-lf-solder-pe3w13774lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W13774LF CAD Drawing

TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder

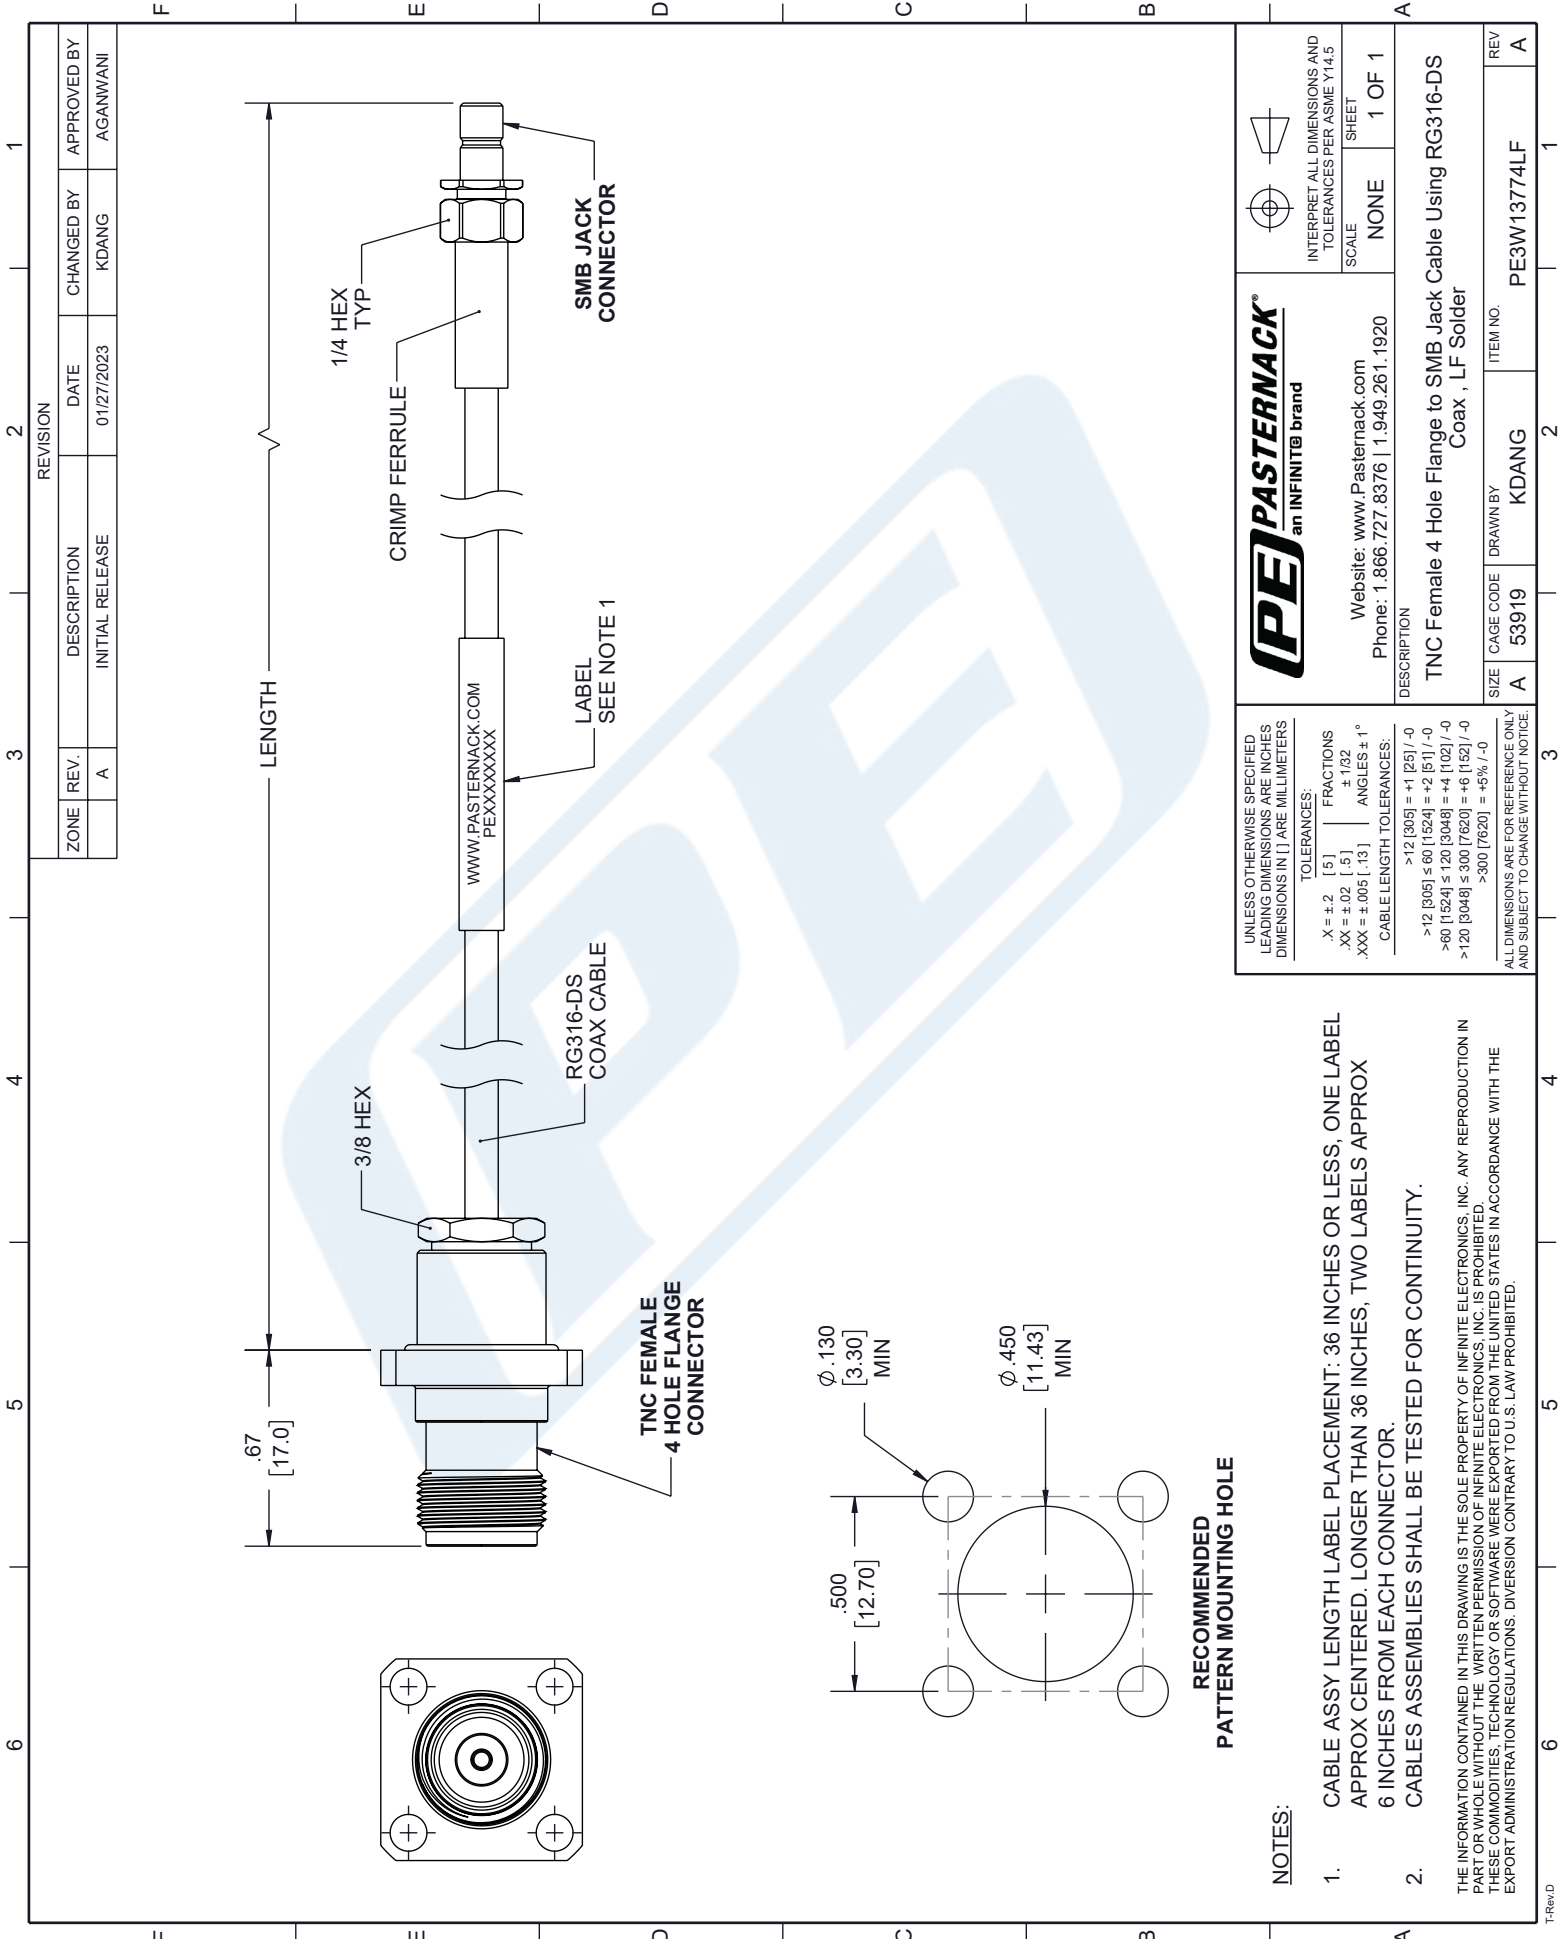

NOTES:

1. CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
2. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

RECOMMENDED PATTERN MOUNTING HOLE

<p>PE PASTERNAK[®] an INFINIT[®] brand</p> <p>Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920</p>		<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>
<p>DESCRIPTION: TNC Female 4 Hole Flange to SMB Jack Cable Using RG316-DS Coax , LF Solder</p>		
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>.X = ±.2 [5] FRACTIONS .XX = ±.02 [.5] ±.1/32 .XXX = ±.005 [.13] ANGLES ± 1°</p> <p>CABLE LENGTH TOLERANCES:</p> <p>>12 [305] = +1 [25] / -0 >60 [1524] = +2 [51] / -0 >120 [3048] = +4 [102] / -0 >300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0</p> <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.</p>	<p>SIZE: A</p> <p>CAGE CODE: 53919</p> <p>DRAWN BY: KDANG</p> <p>ITEM NO.: PE3W13774LF</p>	<p>REV: A</p>