

TNC Male to 4.3-10 Male Cable Using PE-SR402FLJ Coax



PE3W16690

Configuration

- Connector 1: TNC Male
- Connector 2: 4.3-10 Male
- Cable Type: PE-SR402FLJ
- Coax Flex Type: Formable

Features

- Shielding Effectivity > 100 dB
- 70% Phase Velocity
- FEP Jacket

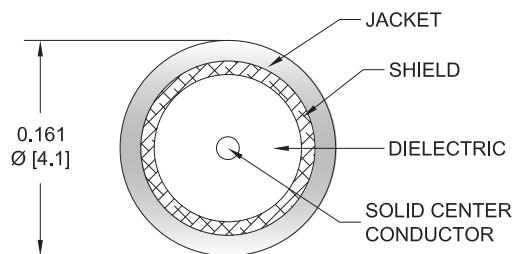

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W16690 TNC male to 4.3-10 male cable using PE-SR402FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack TNC to 4.3-10 cable assembly has a male to male gender configuration with 50 ohm formable PE-SR402FLJ coax.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.23 [27]		Ohms/1000ft [Ohms/Km]

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.16 lbs [72.57 g]

Cable

Cable Type	PE-SR402FLJ
------------	-------------

TNC Male to 4.3-10 Male Cable Using PE-SR402FLJ Coax

PE3W16690

Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Outer Conductor 1 Material and Plating	Tinned Copper Braid
Jacket Material	FEP, Black
Jacket Diameter	0.161 in [4.09 mm]
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.575 in [40.01 mm]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	4.3-10 Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating		Brass, Silver
Dielectric Type		PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Coupling Nut Material and Plating		Brass, Tri-Metal

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

TNC Male to 4.3-10 Male Cable Using PE-SR402FLJ Coax

PE3W16690**Typical Performance Data****How to Order**

Part Number Configuration:

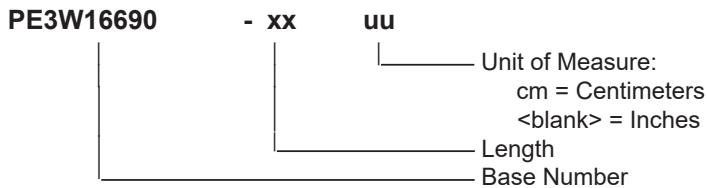

Example: PE3W16690-12 = 12 inches long cable
PE3W16690-100cm = 100 cm long cable

TNC Male to 4.3-10 Male Cable Using PE-SR402FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to 4.3-10 Male Cable Using PE-SR402FLJ Coax PE3W16690](#)

URL: <https://www.pasternack.com/tnc-male-to-4.3-10-male-cable-using-pe-sr402flj-pe3w16690-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W16690 CAD Drawing

TNC Male to 4.3-10 Male Cable Using PE-SR402FLJ Coax

