

## BNC Twinax Jack Right Angle Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing



### PE44116

#### Configuration

- BNC Twinax Jack Connector
- MIL-STD-348
- 78 Ohms
- Right Angle Body Geometry
- Connector Interface Types: Thru Hole

#### Features

- Silver Plated Contact
- Contact plating according to QQ-S-365

#### Applications

- General Purpose Test
- PCB Applications

#### Description

Pasternack's PE44116 Right Angle, BNC Twinax, Standard, connector with solder attachment for Thru Hole PCB is part of our full line of RF components available for same-day shipping. Its right angle body geometry allows for easier connections in tight spaces.

Our 78 ohm BNC Twinax jack right angle connector PE44116 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Impedance		78		Ohms

#### Mechanical Specifications

##### Size

Length	1.06 in [26.92 mm]
Width	0.688 in [17.48 mm]
Height	0.785 in [19.94 mm]
Weight	0.034 lbs [15.42 g]

#### Material Specifications

Description	Material	Plating
Contact		Silver QQ-S-365
Insulation	PTFE	
Body	Brass	Nickel QQ-N-290

## BNC Twinax Jack Right Angle Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing



### PE44116

---

#### Environmental Specifications

Temperature

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

BNC Twinax Jack Right Angle Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack Right Angle Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing PE44116](#)

URL: <https://www.pasternack.com/bnc-twinax-jack-standard-thru-hole-pcb-connector-pe44116-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE44116 CAD Drawing

BNC Twinax Jack Right Angle Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing

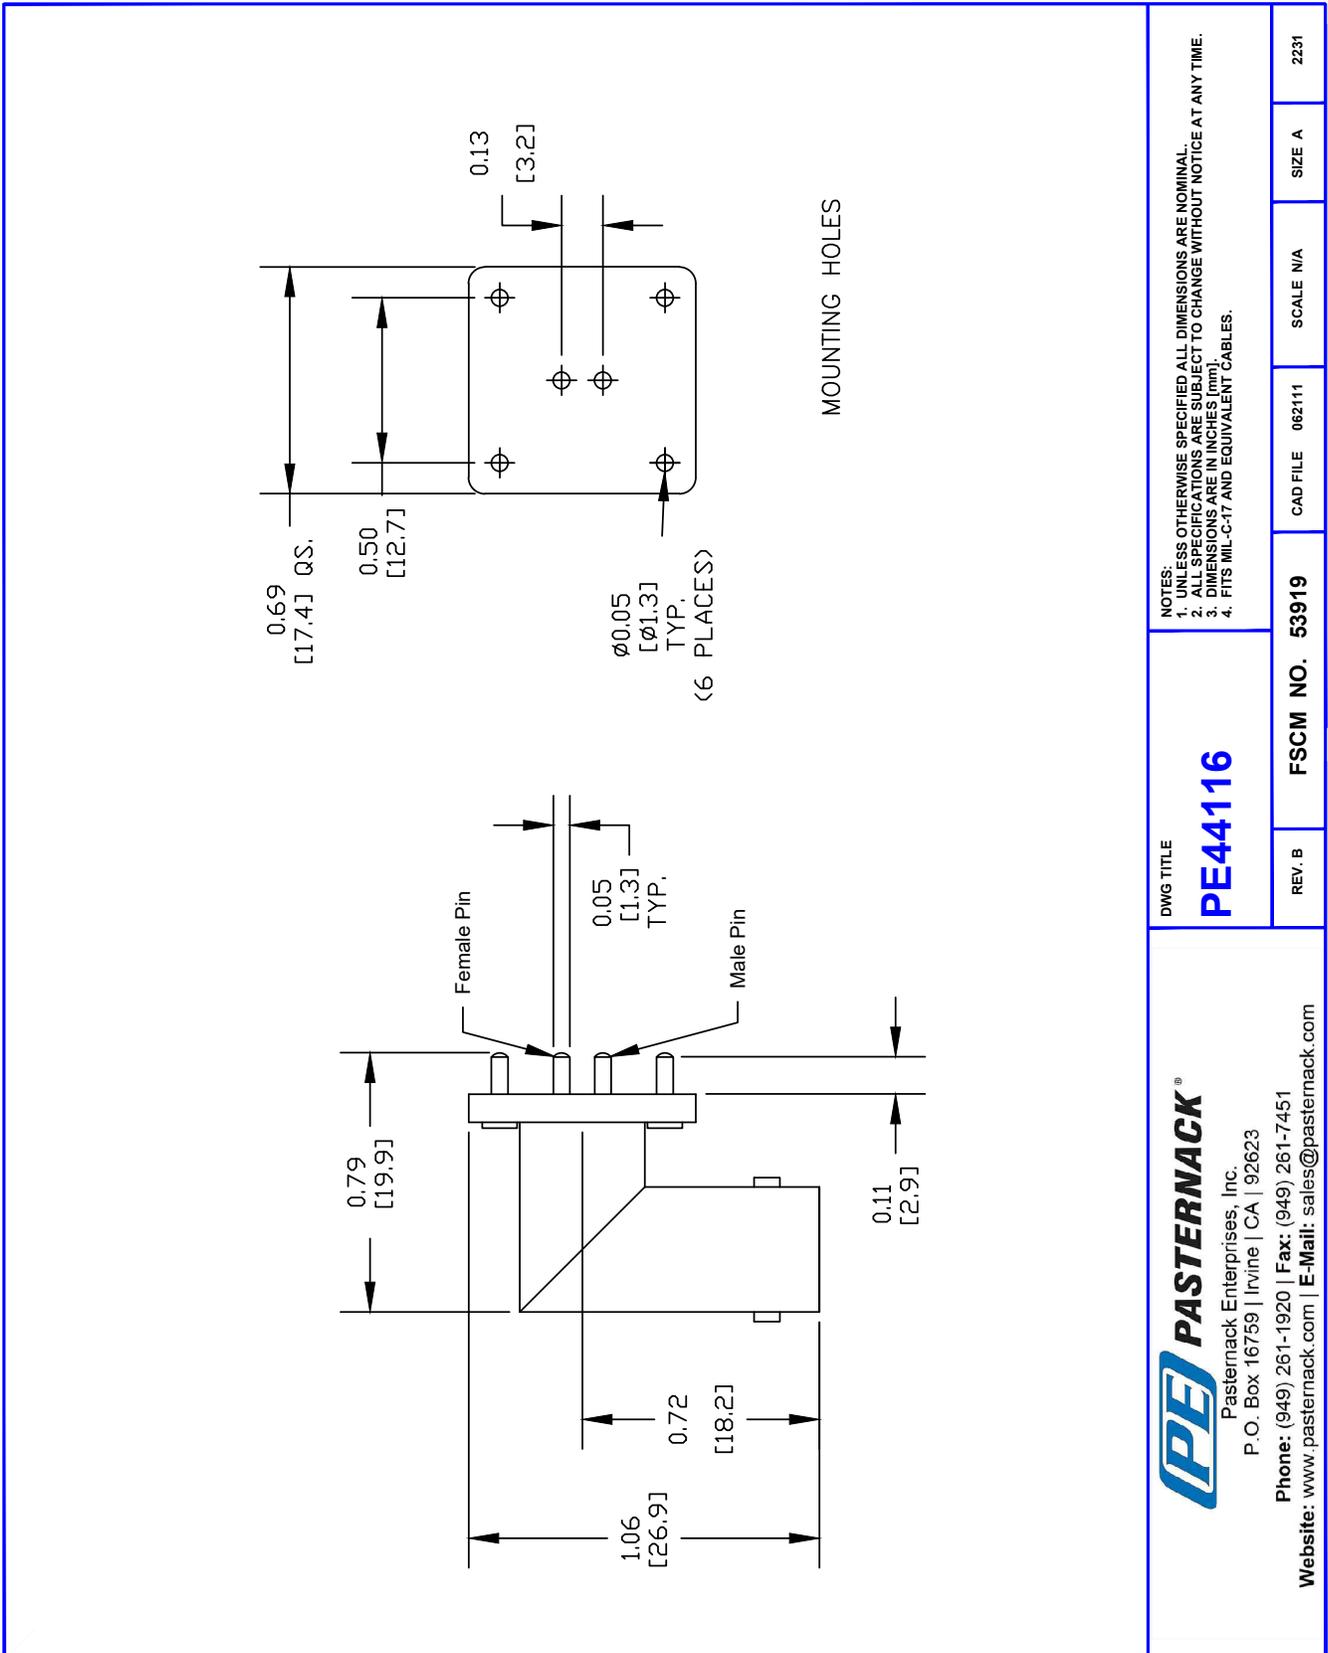

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE44116**

REV. B	FSCM NO. 53919	CAD FILE 062111	SCALE N/A	SIZE A	2231
--------	----------------	-----------------	-----------	--------	------

**PE PASTERNAK**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com