

UHF Male Connector Solder Attachment for RG59B/U, RG62, RG71

PE44828



Configuration

- UHF Male Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: RG59B/U, RG62, RG71

Features

- Max. Operating Frequency 300 MHz
- Good VSWR of 1.3:1
- Gold Plated Brass Contact
- 30µ in. minimum contact plating

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE44828 , UHF, Standard, Connector is part of our full line of RF components available for same-day shipping. Our UHF male connector operates up to a maximum frequency of 300 MHz and offers good VSWR of 1.3:1.

Our UHF male connector PE44828 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.3:1	
Operating Voltage (AC)			500	Vrms
Impedance		50		Ohms

Mechanical Specifications

Size

Length	1.41 in [35.81 mm]
Width	0.7 in [17.78 mm]
Height	0 in [0 mm]
Weight	0.074 lbs [33.57 g]

UHF Male Connector Solder Attachment for RG59B/U, RG62, RG71

PE44828



Material Specifications

Description	Material	Plating
Contact	Brass	Gold 30μ in. minimum
Insulation	Teflon	
Body	Brass	Nickel 100μ in. minimum
Coupling Nut	Brass	Nickel 100μ in. minimum

Environmental Specifications

Temperature Operating Range	-55 to +85 deg C
--------------------------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

UHF Male Connector Solder Attachment for RG59B/U, RG62, RG71 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [UHF Male Connector Solder Attachment for RG59B/U, RG62, RG71 PE44828](#)

URL: <https://www.pasternack.com/uhf-male-rg59b-u-rg62-rg71-connector-pe44828-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE44828 CAD Drawing

UHF Male Connector Solder Attachment for RG59B/U, RG62, RG71

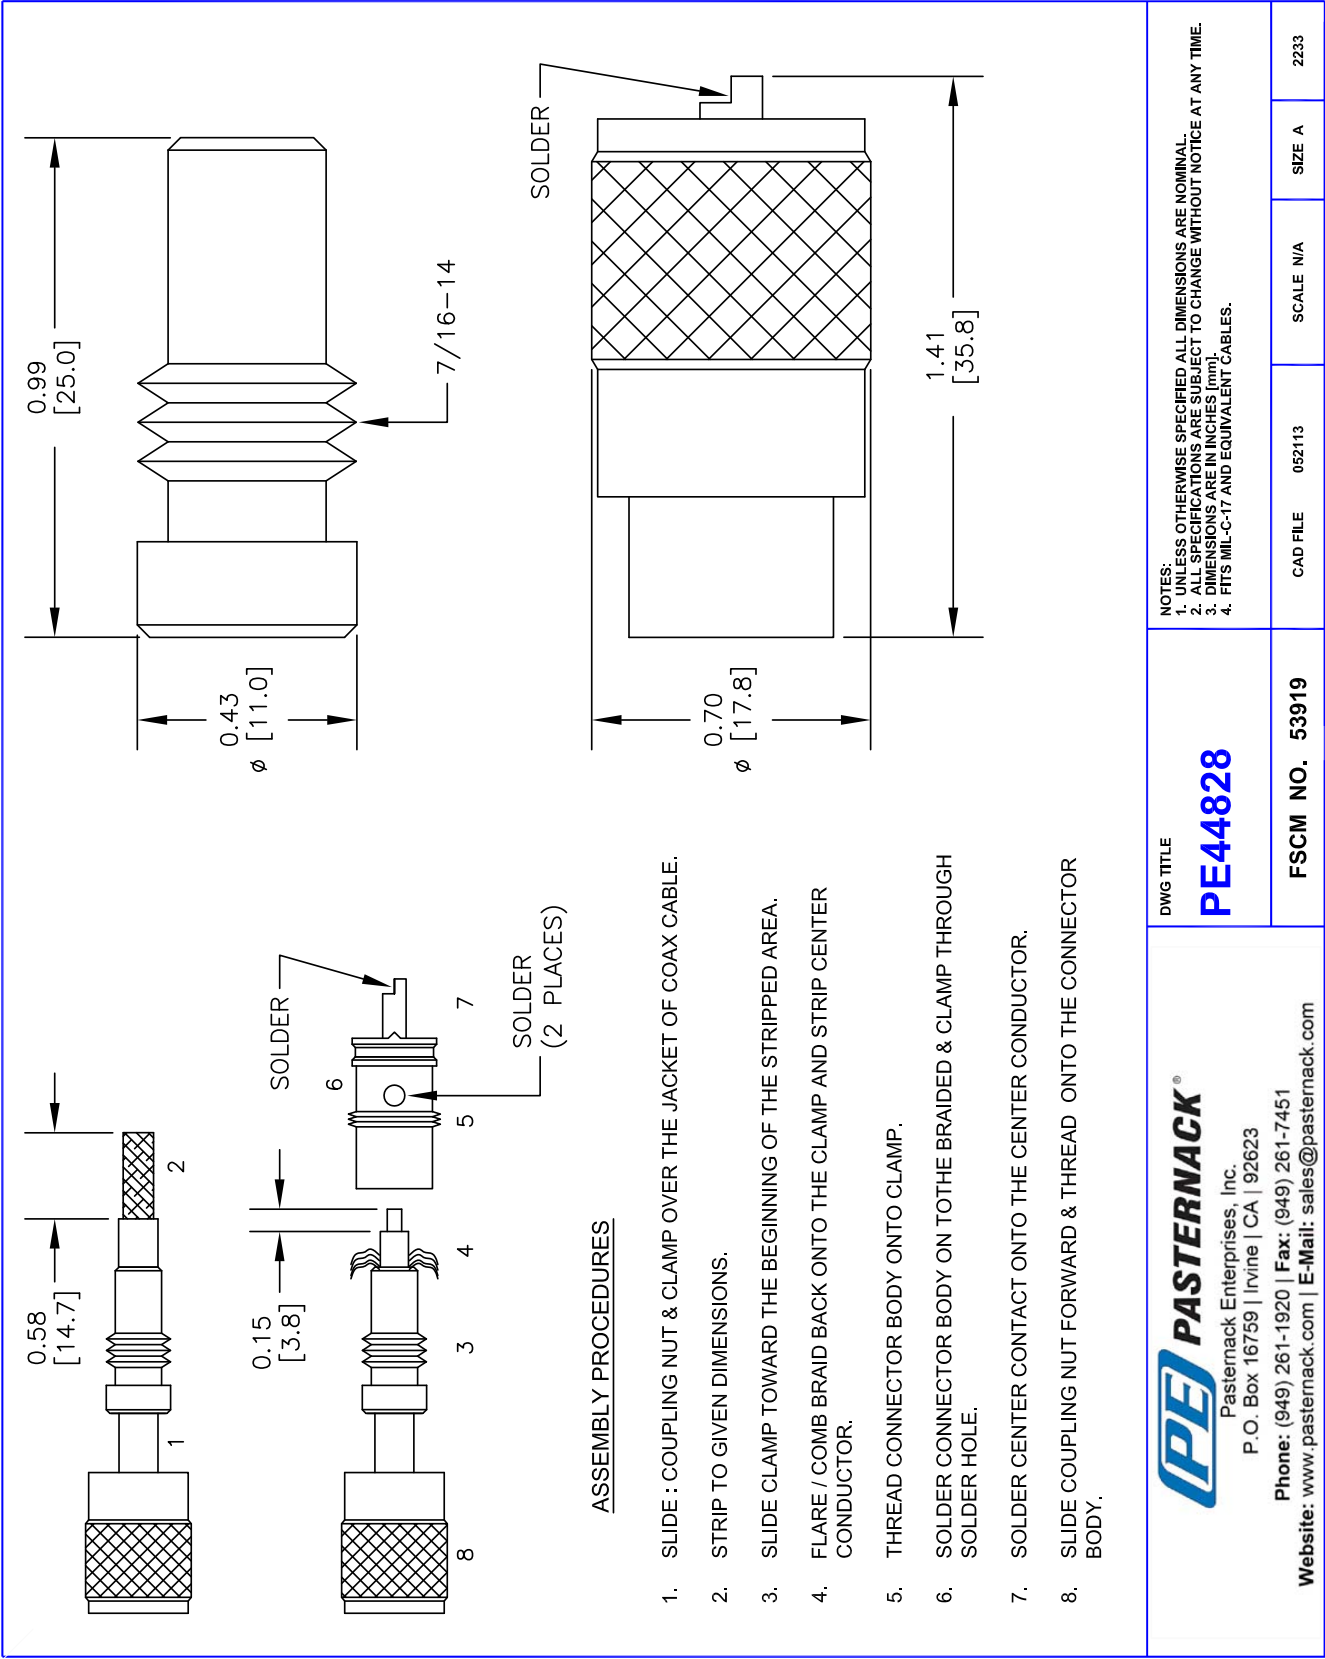

ASSEMBLY PROCEDURES

1. SLIDE : COUPLING NUT & CLAMP OVER THE JACKET OF COAX CABLE.
2. STRIP TO GIVEN DIMENSIONS.
3. SLIDE CLAMP TOWARD THE BEGINNING OF THE STRIPPED AREA.
4. FLARE / COMB BRAID BACK ONTO THE CLAMP AND STRIP CENTER CONDUCTOR.
5. THREAD CONNECTOR BODY ONTO CLAMP.
6. SOLDER CONNECTOR BODY ON TOTHE BRAIDED & CLAMP THROUGH SOLDER HOLE.
7. SOLDER CENTER CONTACT ONTO THE CENTER CONDUCTOR.
8. SLIDE COUPLING NUT FORWARD & THREAD ONTO THE CONNECTOR BODY.



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE44828

FSCM NO. 53919

CAD FILE 052113

SCALE N/A

SIZE A

2233

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.