


RP-BNC Female Connector Crimp/Solder Attachment for RG59B/U, RG62

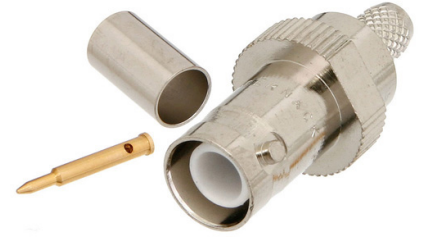

PE4739

Configuration

- BNC Female Reverse Polarity Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: RG59B/U, RG62

Features

- Gold Plated Brass Contact
- 3μ-5μ in. minimum contact plating
- Reverse Polarity

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE4739 , BNC, Standard, Connector is part of our full line of RF components available for same-day shipping. The female reverse polarity configuration uses a female connector body with a male inner contact pin.

Our reverse polarity BNC female connector PE4739 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Impedance		50		Ohms

Mechanical Specifications


Size

Length	1.43 in [36.32 mm]
Width	0.57 in [14.48 mm]
Height	0 in [0 mm]
Weight	0.034 lbs [15.42 g]

Material Specifications

Description	Material	Plating
Contact	Brass	Gold 3μ-5μ in. minimum
Insulation	Teflon	
Body	Brass	Nickel 70μ in. minimum

RP-BNC Female Connector Crimp/Solder Attachment for RG59B/U, RG62

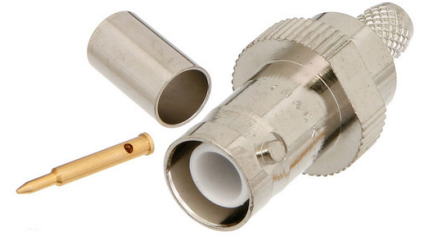

PE4739

Environmental Specifications

Temperature

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


RP-BNC Female Connector Crimp/Solder Attachment for RG59B/U, RG62 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RP-BNC Female Connector Crimp/Solder Attachment for RG59B/U, RG62 PE4739](#)

URL: <https://www.pasternack.com/bnc-female-reverse-polarity-rg59b-u-rg62-connector-pe4739-p.aspx>


The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE4739 CAD Drawing
RP-BNC Female Connector Crimp/Solder Attachment for RG59B/U, RG62

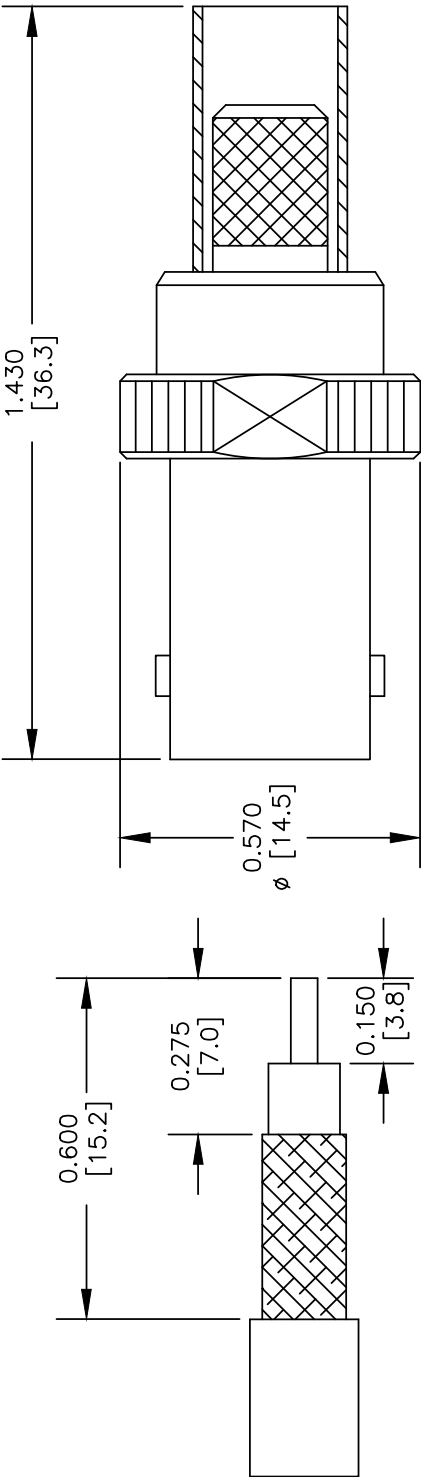

STRIPPING DIMENSIONS

CRIMP SIZE REQUIRED
CONTACT: .068" HEX CRIMP TOOL
FERRULE: .255" HEX CRIMP TOOL

<div> PASTERNAK®</div> <div>Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com</div>		DWG TITLE PE4739		FSCM NO. 53919				NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. 4. FITS MIL-C-17 AND EQUIVALENT CABLES.									
				CAD FILE		060502		SCALE		N/A		SIZE		A		XXXX	