



MCX Jack Connector Solder Attachment 4 Hole Flange  
Solder Cup Terminal, .232 inch Hole Spacing

TECHNICAL DATA SHEET

PE4895

**MCX Jack Connector Solder Attachment 4 Hole Flange Solder Cup Terminal, .232 inch Hole Spacing**

**Configuration**

Connector	MCX Jack
Connector Specification	MIL-C-39012
Connector Interface Type	Solder Cup
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	4 Hole Flange

**Electrical Specifications**

Impedance, Ohms	50
-----------------	----

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-65 to +165
------------------------	-------------

**Size**

Length, in [mm]	0.475 [12.07]
Width/Dia., in [mm]	0.375 [9.53]
Height, in [mm]	0.375 [9.53]
Weight, lbs [g]	0.006 [2.72]

**Connector**

Type	MCX Jack
Contact Material and Plating	Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Brass, Gold
Body Plating Specification	MIL-G-45204
Dielectric Type	Teflon

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Jack Connector Solder Attachment 4 Hole Flange Solder Cup Terminal, .232 inch Hole Spacing PE4895](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



MCX Jack Connector Solder Attachment 4 Hole Flange  
Solder Cup Terminal, .232 inch Hole Spacing

TECHNICAL DATA SHEET

PE4895

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

MCX Jack Connector Solder Attachment 4 Hole Flange Solder Cup Terminal, .232 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Jack Connector Solder Attachment 4 Hole Flange Solder Cup Terminal, .232 inch Hole Spacing PE4895](#)

URL: <http://www.pasternack.com/mcx-jack-standard-solder-cup-terminal-connector-pe4895-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE4895 CAD Drawing

MCX Jack Connector Solder Attachment 4 Hole Flange  
Solder Cup Terminal, .232 inch Hole Spacing

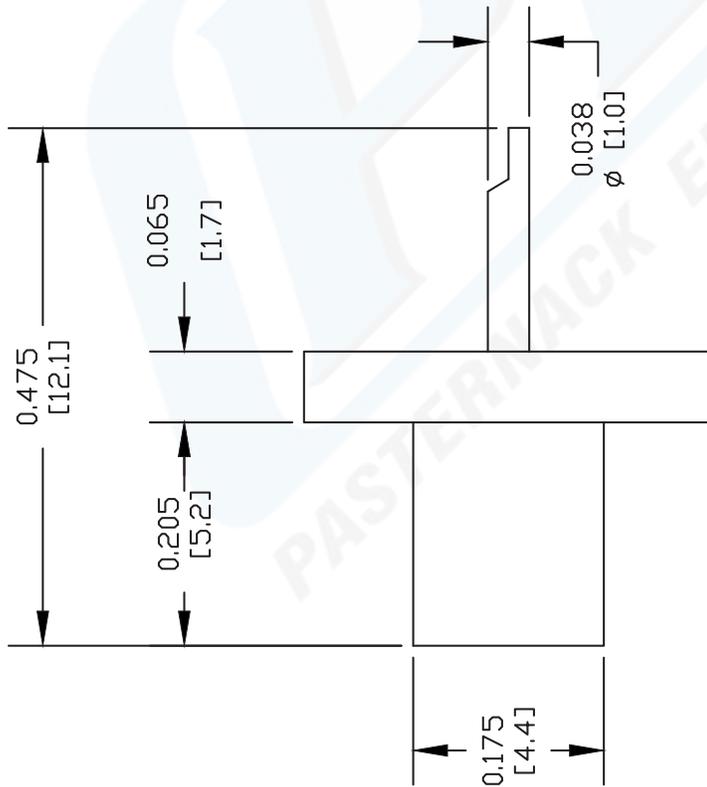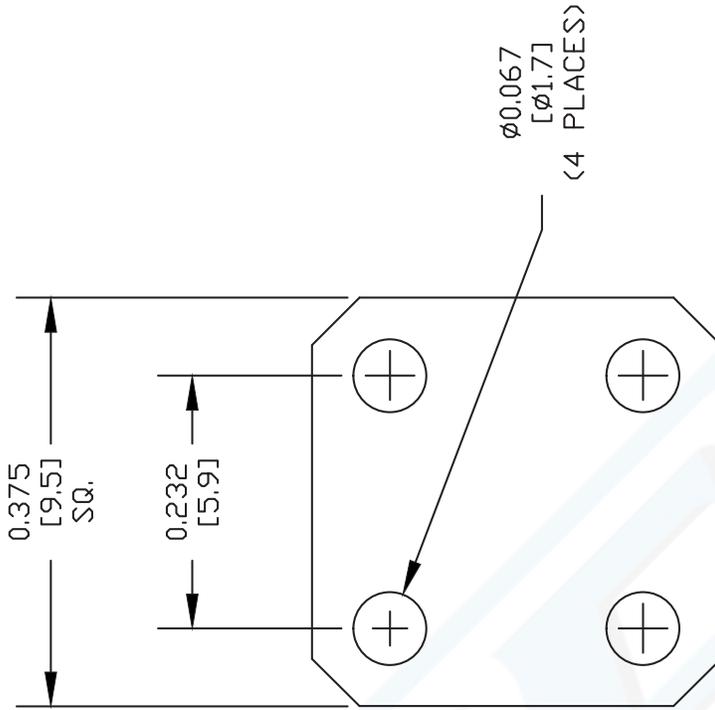

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE4895**

FSCM NO. **53919**

CAD FILE 092704 SCALE N/A SIZE A XXXX

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com