

3 dB Fixed Attenuator, TNC Male to TNC Female Black Anodized Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz



PE7054-3

Features

- Bidirectional
- DC to 18 GHz Frequency Range
- Attenuation 3 ± 0.8 dB
- Max Power 25 Watts (CW)
- VSWR < 1.4:1

Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 3 dB Fixed Attenuator PE7054-3 is rated to 25 Watts and operates from DC to 18 GHz. The versatile coaxial package uses TNC male to TNC female connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Nominal Attenuation		3		dB
Attenuation Accuracy		0.8		dB
VSWR			1.4:1	
Input Power, CW			25	Watts
derated linearly from 25W @ 25°C to 5W @ 125°C				
Input Power, Peak			500	Watts
5μs pulse, 0.05% duty cycle				

Mechanical Specifications

Size

Length	4.66 in [118.36 mm]
Width/Diameter	2.65 in [67.31 mm]
Height	2.65 in [67.31 mm]
Weight	1.028 lbs [466.29 g]
Body Material and Plating	Black Anodized Aluminum Heatsink

Configuration

Design	Fixed, Bidirectional
--------	----------------------

3 dB Fixed Attenuator, TNC Male to TNC
Female Black Anodized Aluminum Heatsink
Body Rated to 25 Watts Up to 18 GHz



PE7054-3

Package Style	Connectorized Module	
Connectors		
Description	Connector 1	Connector 2
Type	TNC Male	TNC Female
Connector Specification	MIL-C-39012	MIL-C-39012
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Hex Size	5/8 in.	
Torque	14 in-lbs 1.58 Nm	
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel

Mechanical Specification Notes:
TNC connectors are Mode-Free up to 18 GHz.

Environmental Specifications

Temperature
Operating Range -65 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

3 dB Fixed Attenuator, TNC Male to TNC Female Black Anodized Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 dB Fixed Attenuator, TNC Male to TNC Female Black Anodized Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz PE7054-3](#)


URL: <https://www.pasternack.com/3db-fixed-tnc-male-tnc-female-25-watts-attenuator-pe7054-3-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

3 dB Fixed Attenuator, TNC Male to TNC Female Black Anodized
Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz

Technical drawing of a heat sink assembly. The drawing shows a central heat sink with two rows of fins. Dimensions are provided in inches and millimeters (in brackets). Callouts include:

- LOCATED ON TNC MALE HEATSINK SURFACE**: Points to the top surface of the heat sink.
- 2X 8-32 TAP x .50 [12.7] DP.**: Points to the top mounting holes.
- 7/16-28**: Points to the top mounting nut.
- 2X M4x0.7 TAP x .50 [12.7] DP.**: Points to the bottom mounting holes.
- 0.25 [6.4]**: Dimension for the bottom mounting hole spacing.
- 1.00 [25.4]**: Dimension for the bottom mounting hole diameter.
- 2.87 [72.9]**: Dimension for the fin height.
- 4.65±0.05 [118.1±1.3]**: Dimension for the total height of the heat sink.
- 1.25 [31.8]**: Dimension for the fin width.

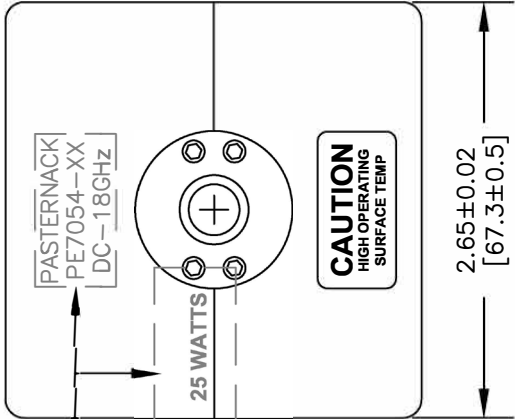

TNC FEMALE

FIGURE 1

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

DWG TITLE
PE7054

FSCM NO. 53919	CAD FILE 022916	SCALE N/A	SIZE A	3045
-----------------------	------------------------	------------------	---------------	------

Phone: (949) 201-1920 | **Fax:** (949) 201-7431
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com