



SMA RF Relay DPDT Switch From DC To 18 GHz Rated To 35 Watts And 24 Volts To 32 Volts With F, T Features

TECHNICAL DATA SHEET

PE7154

**SMA RF Relay DPDT Switch From DC To 18 GHz Rated To 35 Watts And 24 Volts To 32 Volts With F, T Features**

**Configuration**

RF Connector	SMA Female
RF Connector Specification	MIL-C-39012
Control Connector	Solder Terminals
Frequency Range, GHz	DC to 18
Design	DPDT

**Electrical Specifications**

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum Input Power, Watts	35
Maximum Input VSWR	1.5:1
Maximum Insertion Loss, dB	0.5
Minimum Isolation, dB	60
Maximum Speed, ms	15
Control Voltage, Volts	24
Actuating Current, mA	227
Dropout Voltage, Volts	2
Pickup Voltage, Volts	20
Indicator Voltage, Volts	32

**Frequency 1**

Range, GHz	DC to 4
Insertion Loss, dB	0.2
VSWR	1.2
Maximum Input Power, Watts	85
Minimum Isolation, dB	80

**Frequency 2**

Range, GHz	4 to 8
Insertion Loss, dB	0.3
VSWR	1.3:1
Maximum Input Power, Watts	55
Minimum Isolation, dB	70

**Frequency 3**

Range, GHz	8 to 12.4
Insertion Loss, dB	0.4
VSWR	1.4:1
Maximum Input Power, Watts	45
Minimum Isolation, dB	60

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA RF Relay DPDT Switch From DC To 18 GHz Rated To 35 Watts And 24 Volts To 32 Volts With F, T Features PE7154](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA RF Relay DPDT Switch From DC To 18 GHz Rated To 35 Watts And 24 Volts To 32 Volts With F, T Features

TECHNICAL DATA SHEET

PE7154

**Frequency 4**

Range, GHz	12.4 to 18
Insertion Loss, dB	0.5
VSWR	1.5:1
Maximum Input Power, Watts	35
Minimum Isolation, dB	60

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-40 to +85
Storage Range, deg C	-55 to +100

**Size**

Length, in [mm]	2.25 [57.15]
Width, in [mm]	1.57 [39.88]
Height, in [mm]	0.52 [13.21]
Weight, lbs [g]	0.13 [58.97]
Housing Material and Plating	Aluminum, Black Anodized

**RF Connector**

Contact Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Passivated Stainless Steel

**Control Connector**

Contact Material and Plating	Iron Nickel, Tin
------------------------------	------------------

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:	Values at 25 °C, sea level
--------	----------------------------

SMA RF Relay DPDT Switch From DC To 18 GHz Rated To 35 Watts And 24 Volts To 32 Volts With F, T Features from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA RF Relay DPDT Switch From DC To 18 GHz Rated To 35 Watts And 24 Volts To 32 Volts With F, T Features PE7154](http://www.pasternack.com/sma-electromechanical-dpdt-switch-18ghz-35watts-24-32volts-f-t-pe7154-p.aspx)

URL: <http://www.pasternack.com/sma-electromechanical-dpdt-switch-18ghz-35watts-24-32volts-f-t-pe7154-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE7154 CAD Drawing

SMA RF Relay DPDT Switch From DC To 18 GHz Rated To 35 Watts And 24 Volts To 32 Volts With F, T Features

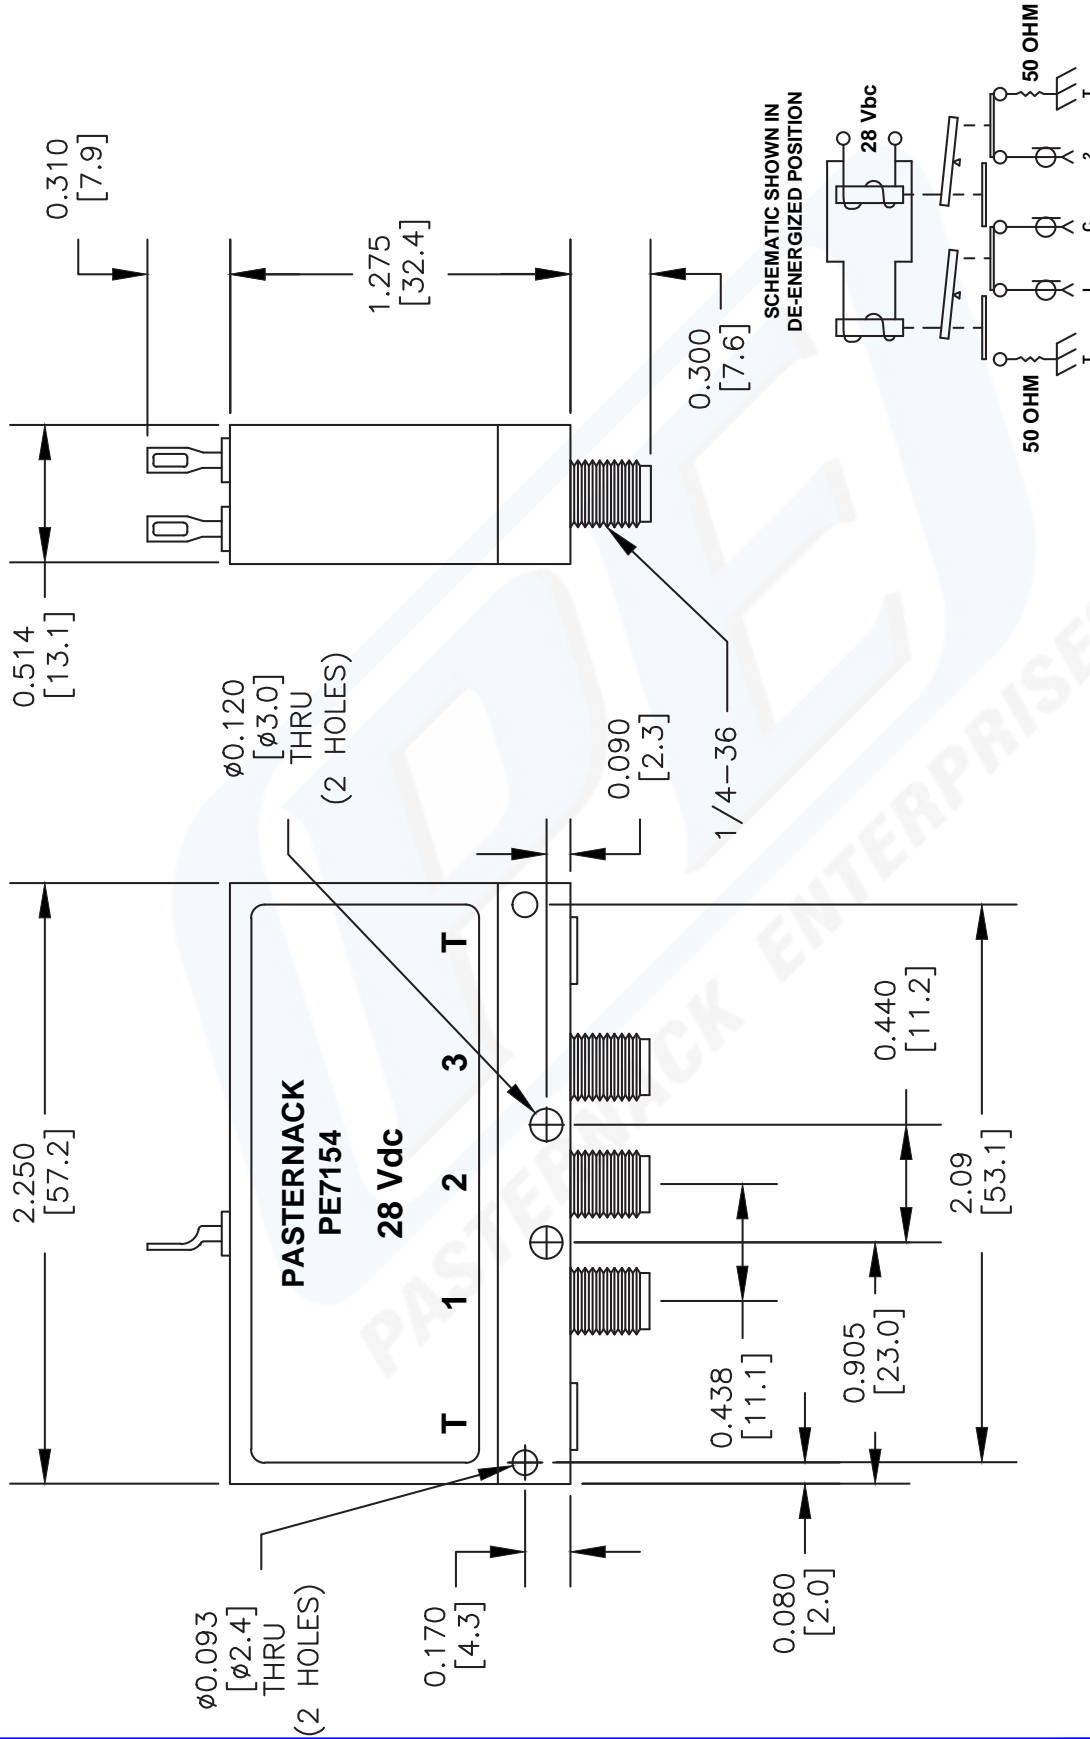

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE7154**

FSCM NO. 53919

CAD FILE 030309

SCALE N/A

SIZE A

XXXX

**PE PASTERNAK®**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com