


20 dB Fixed Attenuator, SMA Female To SMA
Female Directional Black Anodized Aluminum
Heatsink Body Rated To 50 Watts Up To 18 GHz

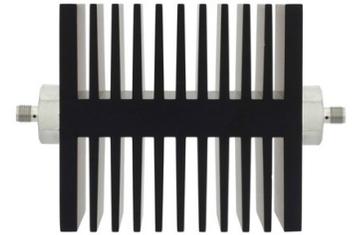

PE7337-20

Features

Applications

Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 20 dB Fixed Attenuator PE7337-20 is rated to 50 Watts and operates from DC to 18 GHz. The versatile coaxial package uses SMA female connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Nominal Attenuation		20		dB
VSWR			1.6:1	
Input Power, CW			50	Watts
Input Power, Peak			500	Watts

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 18			GHz
VSWR, Max	1.3:1	1.45:1	1.6:1			
Attenuation Accuracy, Typ	0.75	0.75	1.25			dB

Mechanical Specifications


Size

Length	4.01 in [101.85 mm]
Width/Diameter	3 in [76.2 mm]
Height	3 in [76.2 mm]
Weight	1.7795 lbs [807.17 g]
Body Material and Plating	Black Anodized Aluminum Heatsink

Configuration

Design	Fixed, Directional
--------	--------------------

20 dB Fixed Attenuator, SMA Female To SMA Female Directional Black Anodized Aluminum Heatsink Body Rated To 50 Watts Up To 18 GHz

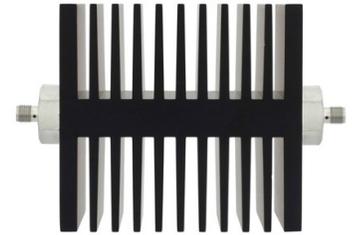

PE7337-20

Connectors

Description	Connector 1	Connector 2
Type	SMA Female	SMA Female
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Outer Conductor Material and Plating		Stainless Steel, Passivated
Coupling Nut Material and Plating	Stainless Steel, Passivated	
Coupling Nut Plating Specification	Stainless Steel	
Hex Size	11/16 In.	11/16 In.
Body Material and Plating	Stainless Steel, Passivated	Stainless Steel, Passivated

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

20 dB Fixed Attenuator, SMA Female To SMA Female Directional Black Anodized Aluminum Heatsink Body Rated To 50 Watts Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [20 dB Fixed Attenuator, SMA Female To SMA Female Directional Black Anodized Aluminum Heatsink Body Rated To 50 Watts Up To 18 GHz PE7337-20](#)

URL: <https://www.pasternack.com/20db-fixed-sma-female-sma-female-50-watts-attenuator-pe7337-20-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE7337-20 CAD Drawing

20 dB Fixed Attenuator, SMA Female To SMA Female Directional Black Anodized Aluminum Heatsink Body Rated To 50 Watts Up To 18 GHz

TOP VIEW

SIDE VIEW

Table of Information	
Connector Type	DIM "A" (REF.)
SMA Male	0.68
SMA Female	0.54
TNC Male	0.98
TNC Female	0.94
N Female	0.95
N Male	0.98
7/16 Male	1.12
7/16 Female	1.16

Part Number Configuration		
xx	Input Connector	Output Connector
10	7/16 Female	7/16 Male
11	N Female	7/16 Male
12	7/16 Male	7/16 Female
13	7/16 Female	7/16 Female
14	N Male	7/16 Female
15	N Female	7/16 Female
16	7/16 Female	N Male
17	N Female	N Male
18	SMA Female	N Male
19	TNC Female	N Male
20	7/16 Female	N Female
21	7/16 Female	N Female
22	N Male	N Female
23	N Female	N Female
24	SMA Male	N Female
25	SMA Female	N Female
26	TNC Male	N Female
27	TNC Female	N Female
28	7/16 Female	SMA Male
29	N Female	SMA Male
30	SMA Female	SMA Male
31	TNC Female	SMA Male
32	7/16 Male	SMA Female
33	7/16 Female	SMA Female
34	N Male	SMA Female
35	N Female	SMA Female
36	SMA Male	SMA Female
37	SMA Female	SMA Female
38	TNC Male	SMA Female
39	TNC Female	SMA Female
40	7/16 Female	TNC Male
41	N Female	TNC Male
42	SMA Female	TNC Male
43	TNC Female	TNC Male
44	7/16 Male	TNC Female
45	7/16 Female	TNC Female
46	N Male	TNC Female
47	N Female	TNC Female
48	SMA Male	TNC Female
49	SMA Female	TNC Female
50	TNC Male	TNC Female
51	TNC Female	TNC Female
-yy	Indicates Attenuation Level	

8X 4-40 UNC-2B
TAP X .250 [6.4]
DP. BOTH SIDES

2.41 [61.2]

3.00 SQ. [76.2]

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

DWG TITLE
PE73xx-yy

FSCM NO. 53919

CAD FILE 102512

SCALE N/A

SIZE A

2233

PB PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com