



## Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter

### RF Adapters Technical Data Sheet

PE91095

#### Configuration

- 4.1/9.5 Mini DIN Female Connector 1
- N Female Connector 2
- 50 Ohms
- Low PIM Design
- Straight Body Geometry

#### Features

- Max VSWR of 1.25:1 up to 6 GHz
- PIM levels lower than -160 dBc
- Silver Plated Beryllium Copper Contact
- 5 µm min Silver Contact Plating

#### Applications

- Allows Connection Between Series
- General Purpose Test

#### Description

Pasternack's PE91095 Low PIM 4.1/9.5 Mini DIN female to type N female adapter is part of our full line of RF components available for same-day shipping. Our 4.1/9.5 Mini DIN to type N adapter has a female to female gender configuration in a Low PIM design. PE91095 4.1/9.5 Mini DIN female to type N female adapter operates to 6 GHz. The Pasternack RF adapter provides excellent VSWR of 1.25:1 maximum and passive intermodulation of -160 dBc maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Passive Intermodulation using 2x20W tones			-160	dBc
Operating Voltage (AC)			1,000	Vrms
Dielectric Withstanding Voltage (AC)			2,500	Vrms

#### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 3	3 to 4	4 to 6			GHz
VSWR, Max	1.1:1	1.15:1	1.25:1			

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter PE91095](#)



## Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter

### RF Adapters Technical Data Sheet

PE91095

Electrical Specification Notes:  
Values at 25°C, sea level.

#### Mechanical Specifications

##### Size

Length

1.76 in [44.7 mm]

Weight

0.128 lbs [58.06 g]

Description	Connector 1	Connector 2
Type	4.1/9.5 Mini DIN Female	N Female
Polarity	Standard	Standard
Mating Cycles	500	500

#### Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	4.1/9.5 Mini DIN Female		N Female	
Contact	Beryllium Copper	Silver 5 µm minimum	Beryllium Copper	Silver 5 µm minimum
Insulation	PTFE		PTFE	
Outer Conductor	Brass	Tri-Metal 3 µm minimum	Brass	Tri-Metal 3 µm minimum

#### Environmental Specifications

##### Temperature

Operating Range

-55 to +120 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter PE91095](#)



## Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter

### RF Adapters Technical Data Sheet

PE91095

Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter PE91095](https://www.pasternack.com/4.1-9.5-mini-din-female-n-female-straight-adapter-pe91095-p.aspx)

URL: <https://www.pasternack.com/4.1-9.5-mini-din-female-n-female-straight-adapter-pe91095-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91095 CAD Drawing

Low PIM 4.1/9.5 Mini DIN Female to N Female Adapter

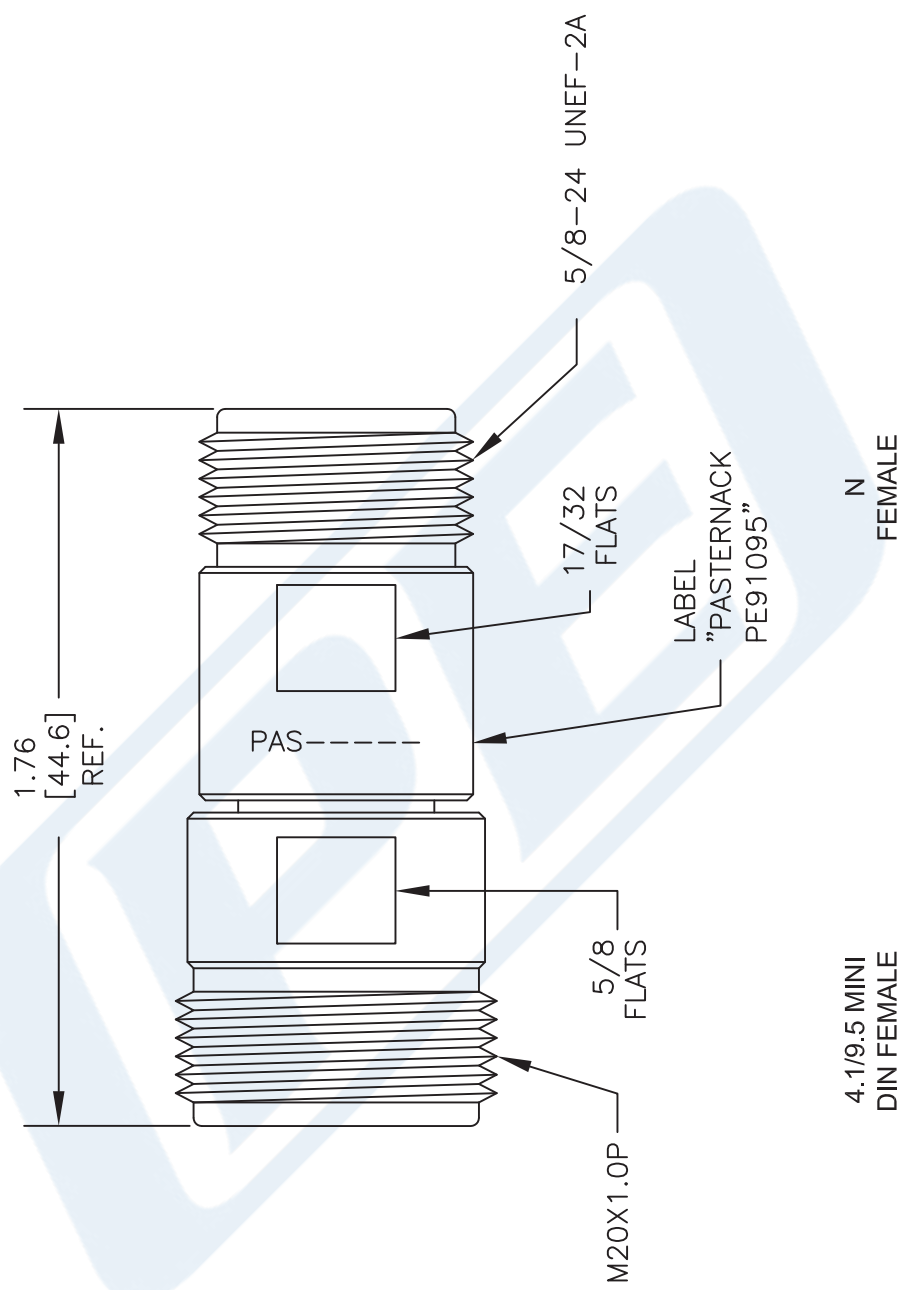

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



**PASTERNAK®**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE  
**PE91095**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE	082616	SCALE	N/A	SIZE	A	41742
----------	--------	-------	-----	------	---	-------